




DIGITUS[®]
by ASSMANN

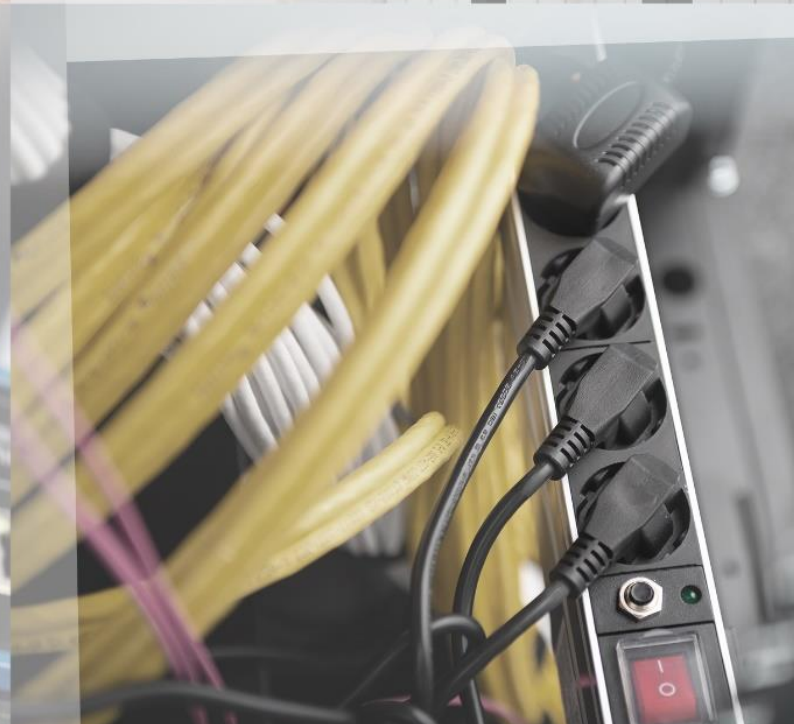

CONTENT

- Topic: USB-C HUBs - New Arrivals 2
- Topic: Workplace Accessories for Home & Office 3
- Topic: Video Converter/Hubs..... 5
- Topic: Ergonomic Desks, Frames & Riser 7
- Topic: All-in-One Video Conference Bars 9
- Topic: Perfect equipment for video conferences..... 10
- Topic: Input Devices and Accessories 12
- Topic: Mobile Phone Charging 14
- Topic: AOC Hybrid Fiber Audio / Video Cable | High Resolution | Fast | Safe 16
- Topic: USB 4.0 Kabel | The Allrounder 17
- Topic: 8K Audio-/Video-Kabel - Für höchste Videoqualität 18
- Topic: Smart Home Cameras..... 21
- Topic: Fiber Optic patch cables 22
- Topic: Slim Patch cables 25
- Topic: Patch cables - 10 pcs per pack..... 27
- Topic: Structured Cabling - CAT 7 S-FTP 29
- Topic: Power over Ethernet 30
- Topic: Cable Management Panels with changeable cable rings 31
- Topic: Varioflex-N - High load capacity and flexible cabling 32
- Topic: Shelves inclusive cable management for high load capacities..... 33
- Topic: LCD KVM - saving space - extend control 34
- Topic: Secure remote power distribution solutions for your Edge applications 35
- Topic: Secure basic power distribution solutions for devices in 19" Network and Server cabinets38
- Topic: E-Mobility 42

Topic: USB-C HUBs - New Arrivals

Products:

Nr.: DA-70245

EAN: 4016032485766

DIGITUS USB-C 4-Port Hub, 2x USB A + 2x USB-C

USB-C 4-Port Hub, 2x USB-A + 2x USB-C Gen2

- 2x USB A 3.1 Gen2 with up to 10Gbps
- 2x USB-C 3.1 Gen2 with up to 10Gbps
- High-quality aluminum housing in slim design

Link: [ASSMANN Website](#)

Nr.: DA-70246

EAN: 4016032485773

DIGITUS USB-C 4-Port Hub

USB-C 4-Port Hub, 4x USB-C 3.1 Gen1, 5Gbps

- 4x USB-C 3.1 Gen1 with up to 5 Gbps
- High-quality aluminum housing in slim design
- Data transfer rate: up to 5Gbps

Link: [ASSMANN Website](#)

Nr.: DA-70242-1

EAN: 4016032455653

DIGITUS USB Type-C™ 4-Port Hub (USB 3.0) + PD

4-Port USB-C Hub + PD, 4x USB 3.0, 1x PD Charging, silver

- Extend your notebook by four USB 3.0 ports
- Charge your connected notebook via the USB-C™ port on the hub
- Plug & play - plug in and get started right away, no installation necessary

Link: [ASSMANN Website](#)



Topic: Workplace Accessories for Home & Office

Products:

Nr.: DA-90429

EAN: 4016032482307

DIGITUS Variable Notebook/Tablet Stand with 6-Port USB-C™ Docking Station

Notebook Stand with USB-C Hub 3x USB 3.0, 1x 4K HDMI, 1x RJ45, 1x PD Charging

- Carrier plate with heat dissipation: W 28 x D 23cm, load-bearing capacity: 7.5kg
- Individual height adjustment: 5.6 - 16.5cm, 2x hinges each can be inclined by 180° for individual angle adjustment
- 1x HDMI (4K/60Hz) - connection of external monitor

Link: [ASSMANN Website](#)



Nr.: DA-90440


EAN: 4016032482291

DIGITUS Variable Notebook Stand with 7-Port Pop-Out USB-C™ Docking Station

Notebook Riser with USB-C Hub, 1x PD, 2x USB-A 3.0, 1x TF, 1x SD, 1x HDMI, 1x RJ-45

- Foldable - Flexible use, whether stationary or on the go
- Variable stand (360° rotatable) for individual angle adjustment
- 7-Port Pop-Out USB-C™ Docking Station - The Docking Station can be removed and used as a standalone peripheral device

Link: [ASSMANN Website](#)

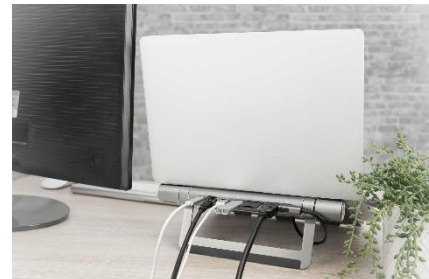

Nr.: DA-90442

EAN: 4016032481904

DIGITUS Desktop Organizer with Qi Charger

Desk organizer, storage drawer, Qi charger, white/grey

- Organizer for filing folders, documents, books, etc.
- Drawer for storing writing utensils, etc. with individual dividers
- Qi charger (5, 7, 10W) for charging mobile devices, such as smartphones

Link: [ASSMANN Website](#)



Nr.: DA-90415
EAN: 4016032475033

DIGITUS LED Monitor Light with Clamp Mount
LED Monitor Bar Light, 5W, 250lm, clamp, black

- Configurable color temperature in 5 levels, from cold to warm (3000-6500K)
- Dimmer with 5 brightness levels – conveniently adjustable using touch control
- Touch control: Easy adjustment of light settings by touch

Link: [ASSMANN Website](#)



Nr.: DA-90411
EAN: 4016032474975

DIGITUS Universal PC Mount for Desk Mounting with Easy-Locking
PC Table Mount, 10kg max., H: 300-510mm, D: 88-203mm, black

- Easy locking – Secure height adjustment without tools
- Continuously adjustable height and width
- Perfectly adapts to different PC housing sizes

Link: [ASSMANN Website](#)



Nr.: DA-90405
EAN: 4016032474586

DIGITUS Smart Monitor Mount with integrated Docking Station, Gas Pressure Spring and Clamp Mount

Monitor Gas Spring Mount with USB-C Dock (5 Port), 30", 9kg max., black

- Perfectly adjusted ergonomic monitor position for all heights
- Integrated docking station with 5 additional ports for optimal connectivity
- With HDMI, VGA, USB A and USB-C™ interfaces incl. Power Delivery (PD 3.0 / 87W max.)

Link: [ASSMANN Website](#)



Topic: Video Converter/Hubs

Products:

Nr.: DS-45333

EAN: 4016032481751

DIGITUS 3-Port MST Video Hub (USB-C™ -> 3x HDMI)

USB-C - 3x HDMI MST Video Hub DP 1.4, HDMI 2.0, 4K/60Hz

- Supports DP 1.4 (Alt mode) with maximum 8.1Gbps per channel, max. 32.4Gbps on 4 channels
- Supports Windows OS (11, 10)
- Resolutions 3 external monitors - MST mode: max. 1x 4K/60Hz + 2x 4K/30Hz

Link: [ASSMANN Website](#)



Nr.: DS-45334

EAN: 4016032482109

DIGITUS 3-Port MST Video Hub (USB-C™ -> 3x DisplayPort)

USB-C - 3x DP MST Video Hub DP 1.4, 4K/60Hz

- Supports DP 1.4 (Alt mode) with maximum 8.1Gbps per channel, max. 32.4Gbps on 4 channels
- Supports Windows OS (11, 10)
- Resolutions 3 external monitors - MST mode: max. 1x 4K/60Hz + 2x 4K/30Hz

Link: [ASSMANN Website](#)



Nr.: DS-45338

EAN: 4016032483731

DIGITUS 2-Port MST Video Hub (USB-C™ -> 2x HDMI)

USB-C - 2x HDMI MST Video Hub DP 1.4, HDMI 2.0, 4K/60Hz

- Supports DP 1.4 (Alt mode) with maximum 8.1Gbps per channel, max. 32.4Gbps on 4 channels
- Supports Windows OS (11, 10)
- Resolution host PC with DP 1.4: max. 2x 4K/60Hz

Link: [ASSMANN Website](#)



Nr.: DS-45339
EAN: 4016032483748

DIGITUS 2-Port MST Video Hub (USB-C™ -> 2x DisplayPort)

USB-C - 2x DP MST Video Hub DP 1.4, 4K/60Hz

- Supports DP 1.4 (Alt mode) with maximum 8.1Gbps per channel, max. 32.4Gbps on 4 channels
- Supports Windows OS (11, 10)
- Resolution host PC with DP 1.4: max. 2x 4K/60Hz

Link: [ASSMANN Website](#)



Nr.: DS-45336
EAN: 4016032481805

DIGITUS 3-Port MST Video Hub (DP -> 2x DP, 1x HDMI)

DP - 2x DP + HDMI MST Video Hub 4K/60Hz

- MST (Multi Stream Transport) function - Distribute independent AV signals from one source device to 3 external monitors
- Supports 3 display modes: Mirror (1 signal mirrored on 3 displays), extend (3 signals on 3 displays), distribute (1 signal distributed across 3 displays)
- Supports Windows OS (11, 10)

Link: [ASSMANN Website](#)



Nr.: DS-45337
EAN: 4016032482093

DIGITUS HDMI eARC converter/splitter

HDMI eARC Converter/Extractor, aluminum housing, grey

- eARC Audio Extractor function
- Audio Splitter function
- Video bandwidth: 18GB/s

Link: [ASSMANN Website](#)




Nr.: DA-70823
EAN: 4016032478713

DIGITUS 8K DP - HDMI Video Converter

DP - HDMI Converter, 15cm, 8K/60Hz, grey, aluminum housing

- Supports Ultra HD - 8K/60Hz
- DisplayPort 1.4
- HDMI 2.1

Link: [ASSMANN Website](#)

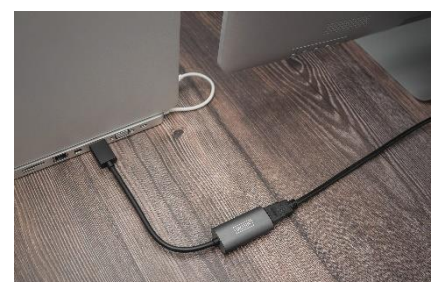

Topic: Ergonomic Desks, Frames & Riser

Products:

Nr.: DA-90406

EAN: 4016032474593

DIGITUS Electric Height-Adjustable Desk with USB-Charger and Drawer

Electric height-adjustable Desk, 120x60x12cm, top 50kg load, USB-charging ports, white

- Smart control pad with LED display
- 4 storage locations for individual height settings
- Height adjustable between 72 and 121cm

Link: [ASSMANN Website](#)



Nr.: DA-90407

EAN: 4016032474609

DIGITUS Electric Height-Adjustable Desk

Electric height-adjustable Desk, 120x60x18cm, top 50kg load, white

- Height adjustable between 73 and 123cm
- Dimensions of tabletop: W 120 x D 60cm
- Maximum load capacity 50kg

Link: [ASSMANN Website](#)



Nr.: DA-90430

| DA-90431

| DA-90432

EAN: [4016032482048](#)

| [4016032482031](#)

| [4016032482024](#)

DIGITUS Electrically Height-Adjustable Table Frame, single motor, 2 levels

Electric Height Adjustable Desk Frame, Single motor, 2-stages, diff. colors

- Maximum load capacity of up to 70kg
- Flexible frame - Suitable for tabletops 110-160cm wide and 50-80cm deep
- Convenient electrical height adjustment (without tabletop): 71.5 - 121.5cm
- Colors: black, white, grey

Link: [ASSMANN Website](#)



Nr.: DA-90433 | DA-90434 | DA-90435
EAN: [4016032482024](#) | [4016032481997](#) | [4016032482017](#)

DIGITUS Electrically Height-Adjustable Table Frame, dual motor, 3 level
 Electric Height Adjustable Desk Frame, Dual motor, 3-stages, diff. colors

- Maximum load capacity of up to 100kg
- Flexible frame - Suitable for tabletops 110-200cm wide and 60-100cm deep
- Convenient electrical height adjustment (without tabletop): 62-127cm
- Colors: white, black, grey



Link: [ASSMANN Website](#)

Nr.: DA-90386
EAN: 4016032456445

DIGITUS Electric height-adjustable stand/ sit desk frame, 90° angle-shaped (L-shaped)
 Electric Height Adjustable Desk Frame, 3-leg, height 124-208cm, load: 120kg, white

- Electric height-adjustable desk base, height: 60 - 125cm, for two tabletops up to 125 -140 & 190 - 210cm, recommended depths: 55 - 90cm
- Angle-shaped - Can be mounted on both sides (right or left)
- With collision protection and a memory function for 4 height settings



Link: [ASSMANN Website](#)

Nr.: DA-90392
EAN: 4016032465102

DIGITUS Electric Height-Adjustable Desk Frame, 120° Corner Design
 Height Adjustable Table Frame, 3-leg 120 degree, black

- Angle shape: 120° corner design
- Three powerful motors for smooth height setting
- Collision protection function can be set to 5 sensitivity levels



Link: [ASSMANN Website](#)

Nr.: DA-90445
EAN: 4016032481874

DIGITUS Ergonomic Stand/Sit Desk Converter
 Desk converter, 6 heights MDF Board, height: 45-405mm, surface: 67x47cm

- Ultra-slim design - just 4.5cm tall when folded together
- 6 lockable height settings
- Height adjustment using spiral spring: 4.5/21.5/26.5/30.5/36.5/40.5cm



Link: [ASSMANN Website](#)

Topic: All-in-One Video Conference Bars

Products:

Nr.: DS-55580

EAN: 4016032487043

DIGITUS 4K All-in-One Video Bar – Video Conference System

4K All-in-One Video Bar, Set ePTZ, AI, 4x mic/1x speaker, 1x table mic

- 4K Ultra-HD ePTZ (electronic Pan-Tilt-Zoom) camera
- Ultra wide angle lens – 120° diagonal, 110° horizontal, 78° vertical
- 4K Ultra HD video calls (up to 3840 x 2160 pixels / 30 frames per second)

Link: [ASSMANN Website](#)

Nr.: DS-55581

EAN: 4016032487050

DIGITUS 4K All-in-One Video Bar – Video Conference System

4K All-in-One Video Bar ePTZ, AI, 2x mic/1x speaker

- 4K Ultra-HD ePTZ (electronic Pan-Tilt-Zoom) camera
- Wide angle lens – 94° diagonal, 90° horizontal, 55° vertical
- 4K Ultra HD video calls (up to 3840 x 2160 pixels / 30 frames per second)

Link: [ASSMANN Website](#)



Topic: Perfect equipment for video conferences

Products:

Nr.: DA-20300

EAN: 4016032485797

DIGITUS USB Condenser Microphone, Studio

USB Microphone, Studio, Desk

- Plug & Play USB Recording Microphone with 1.5m USB cable, microphone stand and additional accessories
- Supports directional recording with cardioid characteristics
- With professional sound chipset, the USB microphone offers a high-resolution sampling rate of 192kHz/24Bit

Link: [ASSMANN Website](#)

Nr.: DA-20301

EAN: 4016032485780

DIGITUS USB Condenser Microphone, Professional

USB Microphone, Professional, Arm

- The 3.5mm stereo headphone output of the table microphone offers direct, latency-free monitoring! This enables you to monitor the microphone input in real time.
- The microphone features a mute button, microphone volume and headset volume control
- Plug & Play USB Recording Microphone with 1.5m USB cable, microphone arm and additional accessories

Link: [ASSMANN Website](#)

Nr.: DA-20310

EAN: 4016032485759

DIGITUS LED Ring Light 10 inch, expandable table stand

LED Ring Light, 10 inch, Desk

- The ring light is perfectly suited for influencers, bloggers or vloggers who record photos or videos using a smartphone for social media. With our LED Ring Light, you can always show your best side thanks to optimal illumination and high variability.
- Control of color temperature in 3 levels (3200/4500/6500K) using the cable remote control for optimal and uniform illumination e.g. of videos and portraits
- Light intensity adjustable in 10 levels, from radiant white to pleasantly muted

Link: [ASSMANN Website](#)



Nr.: DA-20311
EAN: 4016032485742

DIGITUS LED Ring Light 10 inch, extendable tripod stand

LED Ring Light, 10 inch, Stand

- 10 inch LED Ring Light with tripod stand & smartphone mount, dimmable light in various color tones for YouTube video recordings, live stream, makeup/photography.
- Control of color temperature in 3 levels (3200/4500/6500K) using the cable remote control for optimal and uniform illumination e.g. of videos and portraits
- Light intensity adjustable in 10 levels, from radiant white to pleasantly muted




Link: [ASSMANN Website](#)

Nr.: DA-71901
EAN: 4016032467588

DIGITUS Full HD Webcam 1080p with Autofocus, Wide Angle

Full HD 1080p Webcam, Auto focus, Wide view angle

- High-resolution Full HD CMOS image sensor with 1080p resolution
- Auto focus from 7cm to unlimited, automatic focus adjustment
- Wide angle of 90°

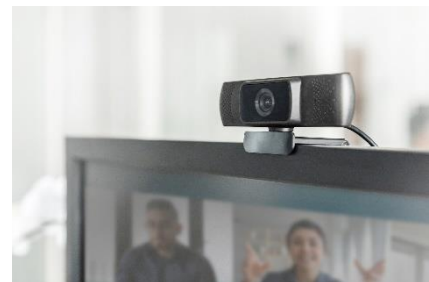

Link: [ASSMANN Website](#)

Nr.: DA-20315
EAN: 4016032485827

DIGITUS Microphone arm with table clamp and cable guidance

Microphone Arm Table clamp and cable guide

- Double suspension springs on each of the two arm elements protect the microphone against vibrations, suddenly falling down and noises
- Suitable for most vocal and dynamic microphones (3/8" & 5/8" universal thread)
- Foldable scissor arm for compact storage and easy transport



Link: [ASSMANN Website](#)

Topic: Input Devices and Accessories

Products:

Nr.: DA-20160

EAN: 4016032482857

DIGITUS USB mouse with cable, 3 buttons, 1200 dpi

Wired USB Optical Mouse 3D, 1200 dpi, black

- Equipped with 3 buttons and scroll wheel for easy operation
- Plug & Play - Immediately ready for use at the workplace after connection
- Optimum DPI setting of 1200 ideal for text or spreadsheet work as well as navigating the Internet

Link: [ASSMANN Website](#)



Nr.: DA-20161

EAN: 4016032482864

DIGITUS Wireless Optical Mouse, 3 buttons, Silent

Wireless Optical Mouse 3D, 2.4GHz, 1200 dpi, black

- Equipped with the classic buttons and the scroll wheel for easy operation
- Plug & Play - Immediately ready for use at the workplace after connection
- Optimum DPI setting of 1200 ideal for text or spreadsheet work as well as navigating the Internet

Link: [ASSMANN Website](#)



Nr.: DA-20162

EAN: 4016032482871

DIGITUS Wireless Optical Mouse, 6 buttons, 1600 dpi

Wireless Optical Mouse 6D, 2.4GHz, 800/1000/1600 dpi, black/grey

- The 6 function keys promote productive work
- Plug & Play - Immediately ready for use after connection
- Adjustable DPI (800/1000/1600) allows high precision for text or spreadsheet work as well as navigating the Internet

Link: [ASSMANN Website](#)



Nr.: DA-20163
EAN: 4016032482888

DIGITUS Wireless Optical Mouse, 6 buttons, Ergonomic

Wireless Ergonomic Optical Mouse 6D, 2.4GHz, 800/1000/1600 dpi, black/grey

- The 6 function keys promote productive work
- Plug & Play - Immediately ready for use after connection
- Adjustable DPI (800/1000/1600) allows high precision for text or spreadsheet work as well as navigating the Internet

Link: [ASSMANN Website](#)



Nr.: DA-20155
EAN: 4016032428374

DIGITUS Ergonomic Vertical Wireless Mouse

Wireless Ergonomic Optical Mouse 6D (Buttons), 2.4GHz, rechargeable battery, black

- The ergonomic design makes it possible to maintain the natural hand and arm position
- Maintains the natural position of the hand and relieves the joints
- 6 buttons: Left, right, middle scrolling, dpi, forwards, backwards

Link: [ASSMANN Website](#)



Nr.: DA-51020 | DA-51021
EAN: [4016032474838](#) | [4016032474845](#)

Ergonomic mousepad with palm rest

GEL MOUSEPAD, black or blue

- Relaxed and comfortable work thanks to optimal support of the wrist
- Soft palm rest with gel filling prevents misalignments and protects and the arms and joints
- Flexible mousepad made of soft material prevents tension
- Slip-proof underside keeps the mousepad firmly in place at the desired position

Link: [ASSMANN Website](#)



Topic: Mobile Phone Charging

Products:

Nr.: DA-10084

EAN: 4016032482789

3 in 1 Charging Station, foldable, wireless

3 in 1 Charging station, wireless for Apple iWatch, Airpods, iPhone

- The station has an integral iWatch charger, the original charging pad is not required
- The smartphone is charged horizontally and vertically, allowing simultaneous charging and video watching
- Inductive charging technology for wireless charging of compatible smartphones

Link: [ASSMANN Website](#)

Nr.: DA-10082

EAN: 4016032483403

Wireless Charging, Pad, Duo, 15W

Wireless Charging Pad, Duo, 15W

- Intelligent distribution of charging power depending on the device placed on top (15W+0W, 10W+5W, 7.5W+7.5W or 5W+5W (max. 15W))
- Compatible with all Qi-capable smartphones as well as Qi-capable AirPods®/AirPods Pro®
- Inductive charging technology for wireless charging of compatible smartphones

Link: [ASSMANN Website](#)

Nr.: DA-10080

EAN: 4016032482765

Wireless Charging Pad, magnetic, 15W

Wireless charging pad, magnetic, 15W, MagSafe compatible

- Compatible with iPhone® 12/13
- Inductive charging technology for wireless charging of compatible smartphones
- The magnetic ring is optimized for the latest Apple iPhone® models and the charging function can be used with any smartphone that allows inductive charging.

Link: [ASSMANN Website](#)



Nr.: DA-10083
EAN: 4016032482697

Charging station with 6 charging spots, 58W

USB Charging station with 6 Port With PD 3.0 and Qi Wireless Charging Pad

- No additional charging adapters are required and only one socket is occupied
- The charging station comes with 5 short charging cables, all tidy and organized
- 2 cables for Apple devices, 1 cable for Android devices, 2 cables for USB-C-capable devices

Link: [ASSMANN Website](#)



Nr.: DA-10081
EAN: 4016032482741

Wireless Charging Pad, single, 15W

Wireless charging pad, single, 15W

- Intelligent distribution of charging power depending on the device placed on top: 5W, 7.5W, 10W, 15W
- Inductive charging technology for wireless charging of compatible smartphones
- Compatible with all Qi-capable smartphones as well as Qi-capable AirPods®/AirPods Pro®

Link: [ASSMANN Website](#)



Nr.: DA-10060
EAN: 4016032482703

USB-C™ Mini Charging Adapter, 20W

USB-C Mini Charging Adapter, 20W, PD 3.0, white

- Compact charger for USB-C™ devices such as smartphones or tablets
- Supports charging power of up to 20W - compatible with Power Delivery (PD 3.0)
- Integrated surge protection / excess current protection / short circuit protection

Link: [ASSMANN Website](#)



Topic: AOC Hybrid Fiber Audio / Video Cable | High Resolution | Fast | Safe
Products:

Nr.: AK-330150-100-S | AK-330150-150-S | AK-330150-200-S
EAN: [4016032482581](#) | [4016032482598](#) | [4016032482604](#)

DIGITUS 4K USB Type-C to HDMI AOC Adapter Cable

USB - Type C to HDMI AOC FO Adapter cable HDMI Version 2.0, max. 4Kx2K@60Hz, diff. lengths

- The active USB Type-C to HDMI AOC adapter cable is based on a hybrid construction with copper and fiber optic cable, making bandwidths of up to 18Gbit/s with full HDMI signal spectrum possible
- The sturdy, flexible cable also stands out thanks to its low bending radius and a very good transfer of uncompressed audio and video signals over long distances.
- The hybrid fiber optic cable offers additional benefits such as a very tight bending radius and low weight. These features do not negatively affect the high image quality or the ease of the Plug & Play installation.
- Lengths: 10m, 15m, 20m



Link: [ASSMANN Website](#)

Nr.: AK-330160-100-S | AK-330160-150-S | AK-330160-200-S
EAN: [4016032482611](#) | [4016032482628](#) | [4016032482635](#)

DIGITUS 4K USB Type-C AOC AV Connection Cable

USB Type-C - USB Type-C AOC Hybrid FO cable, 4K@60Hz, USB 3.1 SPEC, diff. lengths

- The active USB Type C AOC AV Connection Cable is based on a hybrid construction with copper and fiber optic cable, making bandwidths of up to 21.6Gbit/s.
- The sturdy, flexible cable also stands out thanks to its low bending radius and a very good transfer of uncompressed audio and video signals over long distances.
- The hybrid fiber optic cable offers additional benefits such as a very tight bending radius and low weight. These features do not negatively affect the high image quality or the ease of the Plug & Play installation.
- Lengths: 10m, 15m, 20m



Link: [ASSMANN Website](#)

Topic: USB 4.0 Kabel | The Allrounder
Products:

Nr.: AK-300343-008-S
EAN: 4016032481089

DIGITUS USB 4.0 Type-C connection cable

USB 4.0 connection cable, Type - C to Type – C, max. resolution 8K@30Hz, PD 3.0, 40Gbits/s, 1m, black

- Supports data transfer rates of up to 40Gbit/s
- Supports USB Power Delivery Revision 3.0 (PD 3.0) with 48 V, 5A and 240W
- Backwards-compatible with Thunderbolt 3, USB 3.2, USB 3.1 and USB 2.0

Link: [ASSMANN Website](#)

Nr.: DB-300443-010-S | DB-300443-030-S
EAN: [4016032485865](#) | [4016032485889](#)

DIGITUS USB 4.0 Type-C connection cable

USB 4 connection cable, Type-C to Type-C, AL-Housing PP braid 8K@60Hz, PD 3.0, 40Gbits/s, black, diff. lengths

- Supports data transfer rates of up to 40Gbit/s
- Supports USB Power Delivery Revision 3.0 (PD 3.0) with 20V, 5A and 100W
- Backwards-compatible with Thunderbolt 3, USB 3.2, USB 3.1 and USB 2.0
- Lengths: 1m, 3m

Link: [ASSMANN Website](#)



Topic: 8K Audio-/Video-Kabel - Für höchste Videoqualität

Products:

Nr.: DB-330200-010-S | DB-330200-020-S | DB-330200-030-S
EAN: [4016032481201](#) | [4016032481218](#) | [4016032481225](#)

DIGITUS 8K PREMIUM HDMI 2.1 Connection Cable

8K PREMIUM HDMI 2.1 Connection cable, gold plated, support 8K/60Hz, diff. lengths

- HDMI plug to HDMI plug
- Enables the ultimate 8K experience with Ultra-HD-2 resolutions of up to 7680 x 4320 pixels (supported with HDR) and high speed with a refresh rate of 60 Hz (4K with 120Hz)
- 3D signal transfer combined with Dolby TrueHD support enables a one-of-a-kind home cinema experience, perfect for Netflix, Disney+, Sky, Amazon Prime Video or DAZN
- Lengths: 1m, 2m, 3m

Link: [ASSMANN Website](#)

Nr.: DB-340105-010-S | DB-340105-020-S
EAN: [4016032484257](#) | [4016032484240](#)

DIGITUS 8K DisplayPort Connection Cable Version 1.4

8K@60Hz; DP to DP Connection cable, DP 1.4, Aluminum Housing, black, diff. lengths

- DisplayPort plug to DisplayPort plug
- Connects PC/Computer, notebook or graphics card for gaming with DP-capable devices such as TVs, screens, monitors, projectors, displays
- Supports the video formats 8K@60Hz, 4K@144Hz and resolutions of 7680 x 4320p and 3840 x 2160p - Also enables a color depth of 30 bits
- Lengths: 1m, 2m

Link: [ASSMANN Website](#)

Nr.: DB-340106-010-S | DB-340106-020-S
EAN: [4016032484233](#) | [4016032484226](#)

DIGITUS 8K DisplayPort Adapter Cable, Mini DP to DP

8K@60Hz, mini DP to DP, DP 1.4, Aluminum Housing, black, diff. lengths

- Mini DisplayPort plug to DisplayPort plug
- Connects PC/Computer, notebook or graphics card for gaming with DP-capable devices such as TVs, screens, monitors, projectors, displays
- Supports the video formats 8K@60Hz, 4K@144Hz and resolutions of 7680 x 4320p and 3840 x 2160p - Also enables a color depth of 30 bits
- Lengths: 1m, 2m

Link: [ASSMANN Website](#)



Nr.: DB-340201-010-S | DB-340201-020-S | DB-340201-030-S
EAN: [4016032481232](#) | [4016032481010](#) | [4016032481027](#)

DIGITUS 8K DisplayPort Connection Cable Version 1.4

PREMIUM DP1.4 Cable, DP to DP, 8K/60Hz, Aluminum Housing, gold plated, support 8K/60Hz, diff. lengths

- DisplayPort plug to DisplayPort plug
- Connects PC/Computer, notebook or graphics card for gaming with DP-capable devices such as TVs, screens, monitors, projectors, displays
- Supports the video formats 4K/2K@120Hz, 5K@60Hz or 8K@60Hz and resolutions of 3840 x 2160p, 5120 x 2880p and 7680 x 4320p - Also enables a color depth of 24 bits
- Lengths: 1m, 2m, 3m



Link: [ASSMANN Website](#)

Nr.: AK-330126-100-S | AK-330126-150-S | AK-330126-200-S | AK-330126-300-S
EAN: [4016032467038](#) | [4016032467045](#) | [4016032467052](#) | [4016032467069](#)

DIGITUS HDMI® AOC Hybrid Fiber Optic Cable, UHD 8K

HDMI AOC hybrid-fiber connection cable, Type A M/M, UHD 8K@60Hz, gold, black, diff. lengths

- Active fiber optic data transfer of up to 48 Gbps - zero frame delay
- Resolutions of up to 8K@60Hz
- Transfers uncompressed HDMI® video and audio signals
- Lengths: 10m, 15m, 20m, 30m



Link: [ASSMANN Website](#)

Nr.: AK-340107-100-S | AK-340107-150-S | AK-340107-200-S | AK-340107-300-S
EAN: [4016032467076](#) | [4016032467083](#) | [4016032467090](#) | [4016032467106](#)

DIGITUS DisplayPort™ AOC Hybrid Fiber Optic Cable, UHD 8K

DisplayPort AOC hybrid-fiber connection cable M/M, UHD 8K@60Hz, gold, black, diff. lengths

- Active fiber optic data transfer with up to 32.4Gbps - zero latency
- Resolutions of up to 8K@60Hz
- Transfers uncompressed HDMI® video and audio signals
- Lengths: 10m, 15m, 20m, 30m



Link: [ASSMANN Website](#)

Nr.: DB-340109-010-S

EAN: 4016032484219

DIGITUS 8K Mini DisplayPort Adapter Cable, Mini DP - HDMI Type A

8K@60Hz, M/M, mini DP to HDMI, adapter cable, Aluminum Housing, black, 1m

- Supports up to 8K@60Hz
- Supports 3D with a resolution of 1080p
- Supports HDCP and DPCP

Link: [ASSMANN Website](#)

Nr.: DB-340305-010-S | DB-340305-018-S

EAN: [4016032484202](#) | [4016032484196](#)

DIGITUS 8K DisplayPort Adapter Cable, DP to HDMI Type A

8K@60Hz, DP to HDMI adapter cable, Aluminum housing, black, diff. lengths

- Enables an ultimate 8K experience with Ultra-HD resolutions of up to 7680 x 4320 pixels and high speed with a refresh rate of 60 Hertz
- Connects PC/Computer, notebook or graphics card for gaming with HDMI-capable devices such as TVs, screens, monitors, projectors, displays
- The digital encryption system HDCP protects the transmission of audio and video files against external influences - Supports 3D with a resolution of 1080p
- Lengths: 1m, 1.8m

Link: [ASSMANN Website](#)

Nr.: DB-300334-010-S | DB-300334-020-S

EAN: [4016032484264](#) | [4016032483908](#)

DIGITUS USB Type C to DisplayPort Bi-directional Adapter Cable

8K@30Hz, USB Type C to DP, adapter cable HBR3, Aluminum Housing, black, diff. lengths

- USB Type C to DisplayPort Bi-directional Adapter Cable
- Supports transmission from USB Type-C interface to DisplayPort interface
- Supports transfer from DisplayPort interface to USB Type C interface
- Lengths: 1m, 2m

Link: [ASSMANN Website](#)



Topic: Smart Home Cameras

Products:

Nr.: DN-18602

EAN: 4016032478850

Smart Full HD Outdoor Camera with LED Floodlight, WLAN + Voice Control
Wi-Fi Smart Camera Floodlight Camera

- Full HD video resolution 1080p with wide angle of 90°
- Ultra-bright floodlight with 21 LEDs for optimal lighting
- Voice control via Amazon Alexa & Google Assistant possible

Link: [ASSMANN Website](#)



Nr.: DN-18603

EAN: 4016032478867

Smart Full HD PT Indoor Camera with Auto-Tracking, WLAN + Voice Control
Smart Wi-Fi Camera(Without Lan port) P/T Indoor

- Full HD video resolution 1080p with wide angle of 100°
- Auto-tracking function (movement tracking)
- Rotatable by 355° (PAN) / Swivel range 90° (TILT)

Link: [ASSMANN Website](#)



Nr.: DN-18604

EAN: 4016032478874

Smart Full HD PT Outdoor Camera with Auto-Tracking, Dual LED, WLAN + Voice Control
Smart Wi-Fi PTZ Outdoor Camera Support TUYA, Alexa Google home

- Full HD video resolution 1080p with wide angle of 85°
- Auto-tracking function (movement tracking)
- Rotatable by 355° (PAN) / Swivel range 90° (TILT)

Link: [ASSMANN Website](#)



Topic: Fiber Optic patch cables

Products:

Nr.:	DK-2933-01	DK-2933-02	DK-2933-03	DK-2933-05
	DK-2933-07	DK-2933-10		
EAN:	4016032248910	4016032248927	4016032248934	4016032248941
	4016032248958	4016032248965		

DIGITUS Fiber Optic Singlemode Patch Cord, LC / LC
 FO patch cord, duplex, LC to LC SM OS2 09/125 μ, diff. lengths

- Lengths: 1m, 2m ,3m, 5m, 7m, 10m

Link: [ASSMANN Website](#)




Nr.:	DK-2932-01	DK-2932-02	DK-2932-03	DK-2932-05
	DK-2932-10			
EAN:	4016032249634	4016032249641	4016032249658	4016032249665
	4016032249689			

DIGITUS Fiber Optic Singlemode Patch Cord, LC / SC
 FO patch cord, duplex, LC to SC SM OS2 09/125 μ, diff. lengths

- Lengths: 1m, 2m ,3m, 5m, 10m

Link: [ASSMANN Website](#)

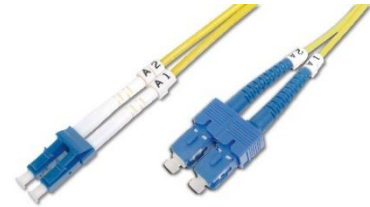


Nr.:	DK-2922-01	DK-2922-02	DK-2922-03	DK-2922-05
	DK-2922-10			
EAN:	4016032248736	4016032248743	4016032248750	4016032248767
	4016032248781			

DIGITUS Fiber Optic Singlemode Patch Cord, SC / SC
 FO patch cord, duplex, SC to SC SM OS2 09/125 μ, diff. lengths

- Lengths: 1m, 2m ,3m, 5m, 10m

Link: [ASSMANN Website](#)

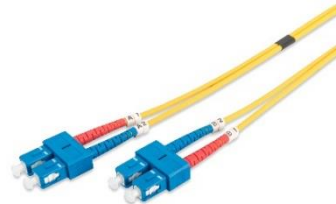

Nr.:	DK-2533-01-4	DK-2533-02-4	DK-2533-03-4	DK-2533-05-4
	DK-2533-07-4			
EAN:	4016032308799	4016032308805	4016032308812	4016032308829
	4016032308836			

Fiber Optic Multimode Patch Cord, OM4, LC / LC
 FO patch cord, duplex, LC to LC MM OM4 50/125μ, diff. lengths

- Lengths: 1m, 2m, 3m, 5m, 7m

Link: [ASSMANN Website](#)



Nr.: DK-2532-01-4	DK-2532-02-4	DK-2532-03-4	DK-2532-05-4
EAN: 4016032308911	4016032308928	4016032308935	4016032308942

Fiber Optic Multimode Patch Cord, OM4, LC / SC

FO patch cord, duplex, LC to SC MM OM4 50/125µ, diff. lengths

- Lengths: 1m, 2m, 3m, 5m,

Link: [ASSMANN Website](#)



Nr.: DK-2522-01-4	DK-2522-02-4	DK-2522-03-4
EAN: 4016032308850	4016032308867	4016032308874

Fiber Optic Multimode Patch Cord, OM4, SC / SC

FO patch cord, duplex, SC to SC MM OM4 50/125µ, different lengths

- Lengths: 1m, 2m, 3m

Link: [ASSMANN Website](#)



Nr.: DK-2533-01/3	DK-2533-02/3	DK-2533-03/3	DK-2533-05/3
DK-2533-07/3			
EAN: 4016032248859	4016032248866	4016032248873	4016032248880
4016032248897			

Fiber Optic Multimode Patch Cord, OM 3, LC / LC

FO patch cord, duplex, LC to LC MM OM3 50/125µ, diff. lengths

- Lengths: 1m, 2m, 3m, 5m, 7m

Link: [ASSMANN Website](#)



Nr.: DK-2532-01/3	DK-2532-02/3	DK-2532-03/3	DK-2532-05/3
EAN: 4016032249566	4016032249580	4016032249597	4016032249603

Fiber Optic Multimode Patch Cord, OM 3, LC / SC

FO patch cord, duplex, LC to SC MM OM3 50/125µ, diff. lengths

- Lengths: 1m, 2m, 3m, 5m

Link: [ASSMANN Website](#)




Nr.: DK-2522-01/3 | DK-2522-02/3 | DK-2522-03/3 | DK-2522-05/3
EAN: [4016032248538](#) | [4016032248545](#) | [4016032248552](#) | [4016032248569](#)

Fiber Optic Multimode Patch Cord, OM 3, SC / SC

FO patch cord, duplex, SC to SC MM OM3 50/125µ, diff. lengths

- Lengths: 1m, 2m, 3m, 5m

Link: [ASSMANN Website](#)

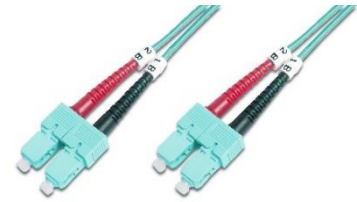

Nr.: DK-2531-02/3 | DK-2531-03/3 | DK-2531-05/3
EAN: [4016032249283](#) | [4016032249290](#) | [4016032249306](#)

DIGITUS Fiber Optic Multimode Patch Cord, OM 3, LC / ST

FO patch cord, duplex, LC to ST MM OM3 50/125 µ, diff. lengths

- Lengths: 2m, 3m, 5m

Link: [ASSMANN Website](#)



Nr.: DK-2512-01/3 | DK-2512-02/3 | DK-2512-03/3
EAN: [4016032248972](#) | [4016032248989](#) | [4016032248996](#)

DIGITUS Fiber Optic Multimode Patch Cord, OM 3, ST / SC

FO patch cord, duplex, ST to SC MM OM3 50/125 µ, diff. lengths

- Lengths: 1m, 2m, 3m

Link: [ASSMANN Website](#)



Nr.: DK-2511-01/3 | DK-2511-02/3 | DK-2511-03/3 | DK-2511-05/3
 DK-2511-10/3
EAN: [4016032248279](#) | [4016032248286](#) | [4016032248293](#) | [4016032248309](#)
[4016032248323](#)

DIGITUS Fiber Optic Multimode Patch Cord, OM 3, ST / ST

FO patch cord, duplex, ST to ST MM OM3 50/125 µ, diff. lengths

- Lengths: 1m, 2m, 3m, 5m, 10m

Link: [ASSMANN Website](#)



Topic: Slim Patch cables

Products:

Nr.:	DK-1617-005S	DK-1617-010S	DK-1617-015S	DK-1617-020S
	DK-1617-030S	DK-1617-050S	DK-1617-100S	DK-1617-150S
EAN:	4016032459958	4016032459965	4016032467939	4016032459972
	4016032459989	4016032459996	4016032460015	4016032460022

CAT 6 U/UTP slim patch cord

CAT 6 U-UTP slim patch cord, Cu, LSZH AWG 28/7, grey, diff lengths

- Small outer diameter of 3.65mm is suitable for flexible use
- With LSZH (low smoke zero halogen) outer sheath for best fire behavior and low smoke emission
- Transparent red colored connector for easy identification of Category 6 (250MHz)
- Lengths: 0.5m, 1m, 1.5m, 2m, 3m, 5m, 10m, 15m



Link: [ASSMANN Website](#)

Nr.:	DK-1617-A-005S	DK-1617-A-010S	DK-1617-A-020S	DK-1617-A-030S
	DK-1617-A-050S	DK-1617-A-070S	DK-1617-A-100S	DK-1617-A-150S
EAN:	4016032461999	4016032461715	4016032461722	4016032461739
	4016032461746	4016032461753	4016032461760	4016032461777

CAT 6A U/UTP slim patch cord

CAT 6A U-UTP slim patch cord, Cu, LSZH AWG 28/7, grey, diff. lengths

- The 0.5 meter (50cm) Category 6A Ethernet cable transmits data at speeds of up to 10.000Mbit/s (10Gbit/s), for example for fiber optic internet speeds in home networks
- Slim LAN cables (3.65mm outer diameter) in the CAT.6A category transmit the full bandwidth of 500 MHz in gigabit networks - They enable a particularly high packing density in network cabinets
- RJ45 connector for compatibility with networks using CAT.5e, CAT.6, CAT.7 & CAT.8 cables - Device compatible e.g. with: FritzBox, game consoles like Xbox & PlayStation, computers, TVs, printers, etc.
- Lengths: 0.5m, 1m, 2m, 3m, 5m, 7m, 10m, 15m



Link: [ASSMANN Website](#)

Nr.: DK-1624-A-010S | DK-1624-A-100S
EAN: [4016032464846](#) | [4016032464891](#)

CAT 6A U/FTP Slim patch cord

CAT 6A U-FTP slim patch cord, Cu, LSZH AWG 28/7, grey, diff. lengths

- Small outer diameter of 4.8mm is suitable for flexible use
- With LSZH (low smoke zero halogen) outer sheath for best fire behavior and low smoke emission
- Transparent yellow colored plug with metal shielding for easy identification of Category 6A (500MHz)
- Lengths: 1m, 10m

Link: [ASSMANN Website](#)



Topic: Patch cables - 10 pcs per pack

Products:

Nr.: DK-1531-005-10 | DK-1531-050-10
EAN: [4016032470113](#) | [4016032470205](#)

CAT 5e SF/UTP patch cord, 10 pieces

CAT 5e SF-UTP patch cord, Cu, PVC AWG 26/7, 10 pieces, grey, diff. lengths

- Transparent blue colored plug with metal shielding for easy identification of Category 5e (100MHz)
- Conductor: Copper (Cu)
- PoE ready
- Lengths: 0.5m, 5m

Link: [ASSMANN Website](#)



Nr.: DK-1617-005-10 | DK-1617-010-10 | DK-1617-020-10
EAN: [4016032470588](#) | [4016032470595](#) | [4016032470601](#)

CAT 6 U/UTP patch cord - LSZH, 10 pieces

CAT 6 U-UTP patch cord, Cu, LSZH AWG 26/7, 10 pieces, grey, diff. lengths

- With LSZH (Low Smoke Zero Halogen) sheath for best fire behavior and low smoke emissions.
- Transparent red colored plug for easy identification of Category 6 (250MHz)
- Conductor: Copper (Cu)
- Lengths: 0.5m, 1m, 2m

Link: [ASSMANN Website](#)



Nr.: DK-1644-0025-10 | DK-1644-005-10 | DK-1644-050-10
EAN: [4016032441274](#) | [4016032441434](#) | [4016032441472](#)

CAT 6 S/FTP patch cord, 10 units

CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, 10 pieces, grey, diff. lengths

- With LSZH (Low Smoke Zero Halogen) sheath for best fire behavior and low smoke emissions.
- Transparent red colored plug with metal shielding for easy identification of Category 6 (250MHz)
- Conductor: Copper (Cu)
- Lengths: 0.25m, 0.5m, 5m

Link: [ASSMANN Website](#)



Nr.:	DK-1644-A-0025-10	DK-1644-A-005-10	DK-1644-A-010-10	DK-1644-A-020-10
	DK-1644-A-030-10	DK-1644-A-050-10		
EAN:	4016032468929	4016032468943	4016032468974	4016032469001
	4016032469018	4016032469025		

CAT 6A S/FTP patch cord, 10 pieces

CAT 6A S-FTP patch cord, Cu, LSZH AWG 26/7, 10 pieces, grey, diff. lengths

- With LSZH (Low Smoke Zero Halogen) sheath for best fire behavior and low smoke emissions.
- Transparent yellow colored plug with metal shielding for easy identification of Category 6A (500MHz)
- Conductor: Copper (Cu)
- Lengths: 0.25m, 0.5m, 1m, 2m, 3m, 5m

Link: [ASSMANN Website](#)



Topic: Structured Cabling - CAT 7 S-FTP

Products:

Nr.:	DK-1743-VH-025	DK-1743-VH-050	DK-1743-VH-1	DK-1743-VH-250
	DK-1743-VH-5	DK-1743-VH-10		
EAN:	4016032480778	4016032480785	4016032392101	4016032480792
	4016032353997	4016032300786		

Cat.7 S/FTP installation cable, simplex, Dca-s1a d1 a1

CAT 7 S-FTP installation cable, 1200MHz DCA (EN 50575), AWG 23/1, SX, orange, diff. lengths

- **PROPERTIES:** Cat7 cable with 4x2 AWG 23/1 core diameter 0.57mm twisted pair copper cables (Cu) – 1200MHz bandwidth up to 10Gbit/s 10GBase-T in accordance with IEEE 802.3 – External diameter 7.2mm – Power over Ethernet (PoE, PoE+)
- **QUALITY CHARACTERISTICS:** LAN cable is shielded (S/FTP shielding with PiMF, pairs in metal foil) – Permanent link GHMT certified – Standards: ISO/IEC 11801, IEC 61156-5, DIN EN 50173-1/4, DIN EN 50288-4-1, EN 60332-1-2, EN 60754-1/2, EN 61034-2, EN 50174-2
- **FIRE PROTECTION:** Data cable corresponds to CPR Euro Class BauPVO Dca s1a d1 a1 in accordance with EN 50575 – LSZH halogen-free flame-retardant low smoke – With SFS-PE polyethylene outer sheath (0.52mm thickness) color orange (RAL 2000)
- **Lengths:** 25m, 50m, 100m, 250m, 500m, 1000m



Link: [ASSMANN Website](#)


Nr.: DK-1743-VH-D-5

EAN: 4016032380573

Cat.7 S/FTP installation cable, diff. lengths, duplex, Dca-s1a d1 a1

CAT 7 S-FTP installation cable, 1200MHz Dca (EN 50575), AWG 23/1, 500m drum,DX, orange

- **PROPERTIES:** Cat7 cable with 4x2 AWG 23/1 core diameter 0.57mm twisted pair copper cables (Cu) – 1200MHz bandwidth up to 10Gbit/s 10GBase-T in accordance with IEEE 802.3 – External diameter 7.2mm – Power over Ethernet (PoE, PoE+)
- **QUALITY CHARACTERISTICS:** LAN cable is shielded (S/FTP shielding with PiMF, pairs in metal foil) – Permanent link GHMT certified – Standards: ISO/IEC 11801, IEC 61156-5, DIN EN 50173-1/4, DIN EN 50288-4-1, EN 60332-1-2, EN 60754-1/2, EN 61034-2, EN 50174-2
- **FIRE PROTECTION:** Data cable corresponds to CPR Euro Class BauPVO Dca s1a d1 a1 in accordance with EN 50575 – LSZH halogen-free flame-retardant low smoke – With SFS-PE polyethylene outer sheath (0.52mm thickness), color orange (RAL 2000)

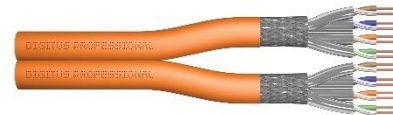

Link: [ASSMANN Website](#)

Topic: Power over Ethernet

Products:

Nr.: DN-95356

EAN: 4016032485049

DIGITUS 24 Port FE PoE Switch 2 Uplink Ports (SFP / RJ45)

24 Port 10/100Mbps PoE 24x10/100Mbps PoE RJ45 Ports, 1x GE RJ45, 1x SFP

- 24x 10/100Mbps PoE RJ45 Ports
- 1x 10/100/1000Mbps Combo Ports
- 1x 10/100/1000Mbps RJ45 Ports



Link: [ASSMANN Website](#)

Nr.: DN-95355

EAN: 4016032485056

DIGITUS 16 Port FE PoE Switch , 2 GE Uplinks (RJ45 / SFP)

16 Port 10/100Mbps PoE Switch 16x 10/100Mbps PoE RJ45 Ports, 1x GE RJ45, 1x SFP

- 16x 10/100Mbps PoE RJ45 Ports
- 1x 10/100/1000Mbps Combo Ports
- 1x 10/100/1000Mbps RJ45 Ports



Link: [ASSMANN Website](#)

Nr.: DN-95358

EAN: 4016032485445

DIGITUS 16+2 Port 10/100/1000Mbps + 2 Gigabit SFP PoE Switch

16+2 Port GE + 2GE SFP Uplink PoE Switch 16+2 Port 10/100/1000Mbps + 2GE SFP PoE Switch

- 16x 10/100/1000Mbps PoE RJ45 connections
- 2x 10/100/1000Mbps combo connections
- 2x 1000Mbps RJ45 connections



Link: [ASSMANN Website](#)

Nr.: DN-95342-1

EAN: 4016032485667

16 Port Fast Ethernet PoE Switch, 19 Inch, Unmanaged, 2 Uplinks

Fast Ethernet PoE Switch 16-port PoE + 2 Combo, 250W PoE budget

- 16-port 10/100Base-TX with PoE support 2-port Combo Gigabit TP/SFP Uplink Maximum PoE power of 250 watts



Link: [ASSMANN Website](#)

Topic: Cable Management Panels with changeable cable rings

Products:

Nr.: DN-19-ORG-4P-B

EAN: 4016032459163

Cable Management Panel with changeable cable rings for 482.6mm (19") Cabinets

1U cable management panel, 4x open plastic rings 44x97mm, black (RAL 9005)

- Easy installation
- Cable management rings can be rotated and replaced

Link: [ASSMANN Website](#)



Nr.: DN-97601-2

| DN-97602-2

EAN: [4016032430612](#)

| [4016032465263](#)

Cable Management Panel with changeable cable rings for 482.6mm (19") Cabinets

1U cable management panel, 5x PVC cable rings 31x85mm, rotatable, replaceable, diff. colors

- Easy installation
- Cable management rings can be rotated and replaced
- Cable management rings can be placed individually
- Colors: grey (RAL 7035), black (RAL 9005)

Link: [ASSMANN Website](#)



Topic: Varioflex-N - High load capacity and flexible cabling

Products:

Nr.: DN-43000

EAN: 4016032486916

DIGITUS Network cabinet Varioflex-N Series - 800x800mm (WxD)

42U network cabinet, Varioflex-N, 2022.6x800x800mm, grey

- 483mm (19") profile rails with high load capacity of up to 1200kg
- Modular, openable base chassis with removable blank panels
- Generously dimensioned vertical cable channels with cable routing and trim panel built into the front panel

Link: [ASSMANN Website](#)



Nr.: DN-43001

EAN: 4016032486923

DIGITUS Network cabinet Varioflex-N Series - 800x1000mm (WxD)

42U network cabinet, Varioflex-N, 2022.6x800x1000mm, grey

- 483mm (19") profile rails with high load capacity of up to 1200kg
- Modular, openable base chassis with removable blank panels
- Generously dimensioned vertical cable channels with cable routing and trim panel built into the front panel

Link: [ASSMANN Website](#)



Nr.: DN-19 FAN-4-N

EAN: 4016032331247

DIGITUS Roof Cooling Unit for Unique & Varioflex-N Network Cabinets & Dynamic Basic Network- and Server Cabinets

Roof ventilation unit, 4 fans, grey for network cabinets Unique, Varioflex-N, Dynamic

- For installation into top-floor module

Link: [ASSMANN Website](#)



Topic: Shelves inclusive cable management for high load capacities

Products:


Nr.: DN-97680 | DN-97681
EAN: [4016032483465](#) | [4016032483489](#)

Shelf with cable management

1U fixed shelf for 600mm depth cabinets incl. cable management, diff. colors

- Cable management brackets and cable feedthroughs on the front side
- Colors: grey, black

Link: [ASSMANN Website](#)

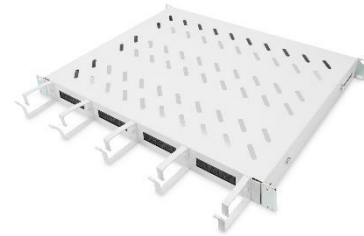


Nr.: DN-97682 | DN-97683
EAN: [4016032483496](#) | [4016032483502](#)

Shelf with cable management

1U fixed shelf for 800mm depth cabinets incl. cable management, diff. colors

- Cable management brackets and cable feedthroughs on the front side
- Colors: grey, black

Link: [ASSMANN Website](#)

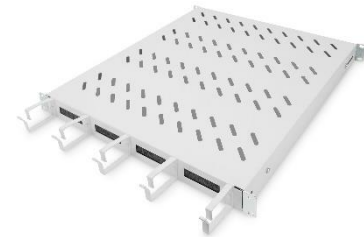

Nr.: DN-97684 | DN-97685
EAN: [4016032483519](#) | [4016032483526](#)

Shelf with cable management

1U fixed shelf for 1000mm depth cabinets incl. cable management, diff. colors

- Cable management brackets and cable feedthroughs on the front side
- Colors: grey, black

Link: [ASSMANN Website](#)



Topic: LCD KVM - saving space - extend control

Products:

Nr.: DS-72210-3GE	DS-72210-3US	DS-72210-3UK	DS-72210-3FR
EAN: 4016032449317	4016032449539	4016032449546	4016032449553

Modular console with 17" TFT (43.2cm), 16-port KVM & Touchpad

Modularized 43.2cm (17") TFT console with 16 port KVM, black (RAL 9005), different keyboards

- Modular console with 17" TFT (43.2cm), 16-port KVM & Touchpad
- Flexible configuration depending on area of application
- Space-saving casing with 1U design height
- Keyboard layouts: German, US-English, UK-English, French

Link: [ASSMANN Website](#)



Nr.: DS-72210-2GE
EAN: 4016032449300

Modular console with 17" TFT (43.2cm), 8-port KVM & Touchpad, german keyboard

Modular console with 17" TFT (43.2cm), 8-port KVM & Touchpad, german keyboard

- Modular console with 17" TFT (43.2cm), 8-port KVM & Touchpad, german keyboard
- Flexible configuration depending on area of application
- Space-saving casing with 1U design height

Link: [ASSMANN Website](#)



Topic: Secure remote power distribution solutions for your Edge applications

Products:

Nr.: DN-95624

EAN: 4016032473275

Smart PDU, Input monitored, 1-phase, 32A, 20x C13, 4x C19

Inlet monitored PDU, vertical, 32A, 20x C13, 4x C19, 2x 16A, circuit breaker, 3m cable, IEC309 32A plug

- Supports remote access via web, SNMP or Telnet
- Monitoring of the input value
- Configurable system with user-defined threshold value setting

Link: [ASSMANN Website](#)

Nr.: DN-95625

EAN: 4016032473282

Smart PDU, Input monitored, 1-phase, 32 A, 36 x C13, 6 x C19

Inlet monitored PDU, vertical, 32A, 36xC13, 6xC19 2x16A circuit breaker, 3m cable, IEC309 32A plug

- Supports remote access via web, SNMP or Telnet
- Monitoring of the input value
- Configurable system with user-defined threshold value setting

Link: [ASSMANN Website](#)

Nr.: DN-95628

EAN: 4016032473374

Smart PDU, Outlet monitored, 1-phase, 16A, 16x C13

Outlet monitored PDU, vertical, 16A, 16x C13, 3m cable, IEC309 16A plug

- Supports remote access via web, SNMP or Telnet
- Monitoring of input and output values
- Configurable system with user-defined threshold value setting

Link: [ASSMANN Website](#)



Nr.: DN-95632
EAN: 4016032473343

Smart PDU, Outlet Monitored & Switched, 1-phase, 32A, 20x C13, 4x C19

Outlet monitored & switch PDU, Vertical 32A, 20x C13 & 4x C19, 3m, IEC60309 32A plug

- Supports remote access via web, SNMP or Telnet
- Monitoring of input and output values and switching of outlets possible
- Configurable system with user-defined threshold value setting

Link: [ASSMANN Website](#)

Nr.: DN-95640
EAN: 4016032481614

Smart PDU, input monitored, input 1x16 A, outputs 20x C13, 4x C19

Inlet monitored PDU, vertical, 16A, 20x C13, 4x C19, 3m cable, IEC60309 16A plug

- Monitors various parameters with defined thresholds and alarm tools
- Various measurements enable early detection of potential outages.
- Up to five PDUs can be accessed with one IP connection; this makes simple and economical installation in your network possible.

Link: [ASSMANN Website](#)

Nr.: DN-95641
EAN: 4016032481621

Smart PDU, input monitored, input 3x16 A, outputs 36x C13, 6x C19

Inlet monitored PDU, 3Ph, 16A, 36x C13, 6x C19, 3m cable, IEC60309 16A plug

- Monitors various parameters with defined thresholds and alarm tools
- Various measurements enable early detection of potential outages.
- Up to five PDUs can be accessed with one IP connection; this makes simple and economical installation in your network possible.

Link: [ASSMANN Website](#)



Nr.: DN-95642
EAN: 4016032481638

Smart PDU, input monitored, input 3x 32A, outputs 30x C13, 12x C19

Inlet monitored PDU, 3Ph, 32A, 30x C13, 12x C19, 6x 16A, circuit breaker, 3m cable, IEC309 3x32A plug

- Monitors various parameters with defined thresholds and alarm tools
- Various measurements enable early detection of potential outages
- Up to five PDUs can be accessed with one IP connection; this makes simple and economical installation in your network possible.

Link: [ASSMANN Website](#)

Nr.: DN-95643
EAN: 4016032481645

Smart PDU, output monitored & switched, input 1x 16A, outputs 20x C13, 4x C19

Outlet monitored & switch, PDU, 20x C13, 4x C19, 3m cable, IEC60309 16A plug

- Monitors various parameters with defined thresholds and alarm tools
- Controls and manages individual outputs or groups
- Various measurements enable early detection of potential outages.

Link: [ASSMANN Website](#)



Topic: Secure basic power distribution solutions for devices in 19" Network and Server cabinets

Products:

Nr.: DN-95407

EAN: 4016032339335

DIGITUS aluminum outlet strip with switch, 7 safety outlets, 2m supply with surge protection

1U Aluminum PDU, rackmountable, 7x safety outlet 16A Plug, 250VAC 50/60Hz, switch, surge Protection

- Perfect power source for your 482.6mm (19") enclosure
- Safety provided due to double earthed safety plug
- Outlets are turned by 35° which ensures space management and easy access



Link: [ASSMANN Website](#)

Nr.: DN-95410

EAN: 4016032352778

DIGITUS aluminum outlet strip with pre-fuse, 8 safety outlets, 2m supply IEC C14 plug

1U Aluminum PDU, rackmountable, 8x CEE 7/7 outlet 10A Plug, 250VAC 50/60Hz, IEC C14 plug, pre-fuse

- Perfect power source for your 482.6mm (19") enclosure
- Outlets are turned by 35° which ensures space management and easy access



Link: [ASSMANN Website](#)

Nr.: DN-95402

EAN: 4016032266402

DIGITUS aluminum outlet strip with switch, 7 safety outlets, 2m supply safety plug

1U Aluminum PDU, rackmountable, 7x safety outlet 16A, 4000W, 250VAC 50/60Hz, switch

- Perfect power source for your 482.6mm (19") enclosure
- Safety provided due to double earthed safety plug
- Outlets are turned by 35° which ensures space management and easy access



Link: [ASSMANN Website](#)

Nr.: DN-95403
EAN: 4016032266419

DIGITUS aluminum outlet strip with overload protection, 7 safety outlets, 2m supply safety plug
 1U Aluminum PDU, rackmountable, 7x safety outlet 16A, 4000W, 250VAC 50/60Hz, overload protection

- Perfect power source for your 482.6mm (19") enclosure
- Safety provided due to double earthed safety plug
- Outlets are turned by 35° which ensures space management and easy access



Link: [ASSMANN Website](#)

Nr.: DN-95427
EAN: 4016032483533

Socket Strip with Aluminum Profile, 10-way, 2m cable IEC C20 plug
 1U Aluminum PDU, rack mountable, 8x C13, 2x C19 16A, 230VAC, 50/60Hz, IEC C20 plug

- Perfect current distribution for your network and IT rack
- Optimal current distribution for connection to a UPS (IEC-60320 C20 input connector)
- The jacks offer optimal space management and easy access



Link: [ASSMANN Website](#)

Nr.: DN-95429
EAN: 4016032483557

Socket Strip with Aluminum Profile, 9-way, IEC C14 input
 1U Aluminum PDU, rack mountable, 9x C13 10A, 230VAC, 50/60Hz, IEC C14 inlet, 10A Fuse

- Perfect current distribution for connection to a UPS (IEC-60320 C14 input)
- Compact construction, 19" 1U housing
- 10A input fuse protects the PDU and the connected consumers against excess voltage.



Link: [ASSMANN Website](#)

Nr.: DN-95430
EAN: 4016032483564

Socket Strip with Aluminum Profile, 9-way, IEC C20 input

1U Aluminum PDU, rack mountable, 7x C13, 2x C19 16A, 230VAC, 50/60Hz, IEC C20 inlet

- Perfect current distribution for your network and IT rack
- Optimal current distribution for connection to a UPS (IEC-60320 C20 input connector)
- The jacks offer optimal space management and easy access



Link: [ASSMANN Website](#)

Nr.: DN-95431
EAN: 4016032483571

Socket strip with aluminum profile, 7 safety sockets, 2m cable with surge protection

1U Aluminum PDU, rack mountable, 7x Safety outlet 16A, 230VAC, 50/60Hz, Overvoltage protection

- Perfect current distribution for your network and IT rack.
- Integrated surge protection protects connected users from overvoltage.
- Jacks are rotated by up to 35°, which offers optimal space management and easy access



Link: [ASSMANN Website](#)

Nr.: DN-95434
EAN: 4016032483601

Socket strip with aluminum profile, 12-way safety sockets, 2m cable safety plug

1U Aluminum PDU, rack mountable, 12x Safety outlet 16A, 230VAC, 50/60Hz, 2m cable

- Perfect current distribution for your network and IT rack
- Jacks are rotated by up to 35°, which offers optimal space management and easy access



Link: [ASSMANN Website](#)

Nr.: DN-95622
EAN: 4016032473404

Local monitored PDU, 1-phase, 18x C13, 2x C19

Local monitored PDU, vertical, 250V, 16A, 18x C13, 2x C19, 16A ammeter, 16A DIN49441 plug, 3m cable

- LCD display
- Integrated amp meter
- Local energy measurement



Link: [ASSMANN Website](#)

Nr.: DN-95407-FR
EAN: 4016032481966

DIGITUS Socket strip with aluminum profile, surge protection and switch, 7-way CEE 7/5 sockets, 2m cable

1U Aluminum PDU, rackmountable, 7x CEE 7/5 16A Plug, 250VAC 50/60Hz, switch, surge Protection

- Perfect current distribution for your network and IT rack
- Integrated surge protection protects connected users from overvoltage.
- Jacks are rotated by up to 35°, which offers optimal space management and easy access



Link: [ASSMANN Website](#)

Nr.: DN-95402-1-FR
EAN: 4016032481959

DIGITUS Socket strip with aluminum profile and switch, 8-way CEE 7/5, 2m cable safety plug with grounding contact

1U Aluminum PDU, rackmountable, 8x CEE 7/5 rated power: 16A, 4000W, 250VAC 50/60Hz

- Perfect power source for your 482.6mm (19") housing
- Safety thanks to doubly grounded safety plug
- Jacks are rotated by up to 35°, which offers optimal space management and easy access



Link: [ASSMANN Website](#)

Nr.: DN-95403-IT
EAN: 4016032483878

DIGITUS Socket strip with aluminum profile and surge protection, 7-way Italian output, 2m cable Italian plug

1U Aluminum PDU, 7x Italian outlet 16A, 4000W, 250VAC 50/60Hz, overload protection

- Perfect power source for your 482.6mm (19") housing
- Jacks are rotated by up to 35°, which offers optimal space management and easy access
- Integrated surge protection ensures maximum safety



Link: [ASSMANN Website](#)

Topic: E-Mobility**Products:**

Nr.: DK-1P32-050	DK-1P32-075	DK-1P32-100
EAN: 4016032481393	4016032481409	4016032481416

EV charging cable, type 2 to type 2

EV charging - Single Phase, 230V, 32A, Type 2 to Type 2 Standard Charger cable, different lengths

- The EV charging cable from DIGITUS is compatible with all electric vehicles (EV) and plug-in hybrid vehicles (PHEV) that have a CCS or Type 2 charging connection and can be charged with alternating current
- Single-phase charging cables for max. 7.4kW/32A are generally used for charging a hybrid vehicle at home – Short cables are ideal if charging is always carried out at the same charging point and the length is sufficient
- For charging outdoors, the charging cable complies with protection class IP55 (water jet-proof), which means that a secure connection is possible between charging station and charging socket (charging inlet)
- Lengths: 5m, 7.5m, 10m

**Link:** [ASSMANN Website](#)

Nr.: DK-1P32-S-050	DK-1P32-S-075	DK-1P32-S-100
EAN: 4016032481478	4016032481485	4016032481492

Spiral EV charging cable, type 2 to type 2

EV charging - Single Phase, 230V, 32A, Type 2 to Type 2 Spiral charger cable, different lengths

- Easy plug and play in home wall box and also in public car charging stations
- Compact and Easy to carry - lightweight and space-saving cable, easy to store in car boot or hang it in garage
- Safety and durability - high quality copper cable and TPU material as outer jacket along with IP55 provides maximum protection for your EV charger and your car
- Lengths: 5m, 7.5m, 10m

**Link:** [ASSMANN Website](#)

Nr.: DK-3P16-050 | DK-3P16-075
EAN: [4016032481423](#) | [4016032481430](#)

EV charging cable, type 2 to type 2

EV charging - Three Phase, 400V, 16A, Type 2 to Type 2 Standard Charger cable, different lengths

- The EV charging cable from DIGITUS is compatible with all electric vehicles (EV) and plug-in hybrid vehicles (PHEV) that have a CCS or Type 2 charging connection and can be charged with alternating current
- Three-phase charging cables for max. 11kW/16A are generally used at home for charging overnight – Short cables are ideal if charging is always carried out at the same charging point and the length is sufficient
- For charging outdoors, the charging cable complies with protection class IP55 (water jet-proof), which means that a secure connection is possible between charging station and charging socket (charging inlet)
- Lengths: 5m, 7.5m



Link: [ASSMANN Website](#)

Nr.: DK-3P16-S-050 | DK-3P16-S-075 | DK-3P16-S-100
EAN: [4016032481508](#) | [4016032481515](#) | [4016032481522](#)

Spiral EV charging cable, type 2 to type 2

EV charging - Three Phase, 400V, 16A, Type 2 to Type 2 Spiral charger cable, different lengths

- Easy plug and play in home wall box and also in public car charging stations
- Compact and easy to carry - lightweight and space-saving cable, easy to store in car boot or hang it in garage
- Safety and durability - high quality copper cable and TPU material as outer jacket along with IP55 provides maximum protection for your EV charger and your car
- Lengths: 5m, 7.5m, 10m



Link: [ASSMANN Website](#)

Nr.: DK-3P32-050 | DK-3P32-075 | DK-3P32-100
EAN: [4016032481454](#) | [4016032481690](#) | [4016032481461](#)

EV charging cable, type 2 to type 2

EV charging - Three Phase, 400V, 32A, Type 2 to Type 2 Standard Charger cable, different lengths

- Easy plug and play in home wall box and also in public car charging stations
- Easy to carry - lightweight and flexible cable, easy to store in car boot or hang it in garage
- Safety and durability - high quality copper cable and TPU material as outer jacket along with IP55 provides maximum protection for your EV charger and your car
- Lengths: 5m, 7.5m, 10m



Link: [ASSMANN Website](#)

Nr.: DK-3P32-S-050 | DK-3P32-S-075 | DK-3P32-S-100
EAN: [4016032481539](#) | [4016032481546](#) | [4016032481553](#)

Spiral EV charging cable, type 2 to type 2

EV charging - Three Phase, 400V, 32A, Type 2 to Type 2 Spiral charger cable, different lengths

- The EV charging cable from DIGITUS is compatible with all electric vehicles (EV) and plug-in hybrid vehicles (PHEV) that have a CCS or Type 2 charging connection and can be charged with alternating current
- Three-phase charging cables for max. 22kW/32A are compatible with all common alternating current charging stations – Short cables (Usable length: 3.5m) are ideal if charging is always carried out at the same charging point and the length is sufficient
- For charging outdoors, the charging cable complies with protection class IP55 (water jet-proof), which means that a secure connection is possible between charging station and charging socket (charging inlet)
- Lengths: 5m, 7.5m, 10m



Link: [ASSMANN Website](#)

Nr.: DK-1P16-A-050
EAN: 4016032481560

EV charger for household socket

EV charger, 5m, 230V, Type F 7/4 to EV Type 2, Adjustable charging power: 1.8/2.3/2.8/3.7kW

- The portable EV charger is suitable for charging at home as well as on the go, if no wallbox or charging station is available - An in-cable control box (ICCB) is also designated as an emergency charging cable
- Compatible with electric vehicles (EV) and plug-in hybrid vehicles (PHEV) that have a CCS or Type 2 charging connection and can be charged with alternating current
- The charger complies with protection class IP55 and is suitable for indoor and outdoor areas - Including supply line, the connection cable with type 2 plug (IEC 62196-2) has a length of 5m



Link: [ASSMANN Website](#)

Nr.: DN-3P16-050
EAN: 4016032482376

Wall Box 3-phase 11kW with 5m Type2 charging cable

Wall-Box 3-Phase 11kW with 5m standard Charger cable

- With the wall charging station, DIGITUS offers a stationary charging solution for private households and companies that want to charge their electric cars on site (parking lot, parking space, garage, carport...)
- The charger is designed for a three-phase power connection with an input voltage of 400V and supports charging operations up to 11kW with 16A (installation by qualified electrician required)
- Compatible with electric vehicles (EV) and plug-in hybrids (PHEV) that have a CCS or Type 2 charging connection and can be charged with alternating current



Link: [ASSMANN Website](#)
