

DIGITUS USB Charger 1x USB-A / 1x USB-C, 30W

DA-10062
EAN 4016032482710



USB Charger 1x USB-A / 1x USB-C 30W Dual Port, 1x 2.4A, 1x 3A, QC3.0

The Dual Port Charging Adapter from DIGITUS® is suitable for USB devices such as smartphones or tablets and provides an output of 30W via the USB-C port or 18W via the USB A port. 2 USB devices can be charged with 15W each at the same time. The integrated short circuit, surge and excess current protection provides added security. Furthermore, the integrated excess heat protection prevents potential overloads and damages to the charger or connected devices.

High-performance wall charger with an output of up to 18W for USB-C™ and 12W for USB A devices

- Double connection: 1x USB Type-C™ (PD) and 1x USB A (QC)
- Compatible with smartphones and tablets from Apple, Huawei, XIAOMI, Google, Samsung
- Input voltage: 100 - 240 V AC, 50/60 Hz
- Output voltage USB-C, PD: 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A (30W max.)
- Output voltage USB-A QC3.0: 5V/3A, 9V/2A, 12V/1.5A (18W max.)

- Note: When both ports are connected, they share a power output of at most 15W (5V, 3A) and do not support any PD and QC fast charging.
- Supports Power Delivery 3.0 with 18W charging capacity
- Surge protection / excess current protection / overload protection / short circuit protection
- Protection against overheating with automatic switch-off and recovery (auto-recovery)
- Housing: Fire-resistant material
- Dimensions: L 29 x W 35 x H 84 mm
- Color: White
- Weight: 61g

Attributes


- Style: Charger/Power supply

Package contents

- 1x USB Charger 1x USB-A / 1x USB-C
- QIG (Quick Installation Guide)

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	50	3.05	0.00	0.00	0.00	0.00
Packaging Unit Inside	1	0.06	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.06	0.00	0.00	0.00	0.00
Net single without Packaging	0	0.00	0.00	0.00	0.00	56.88

More images:

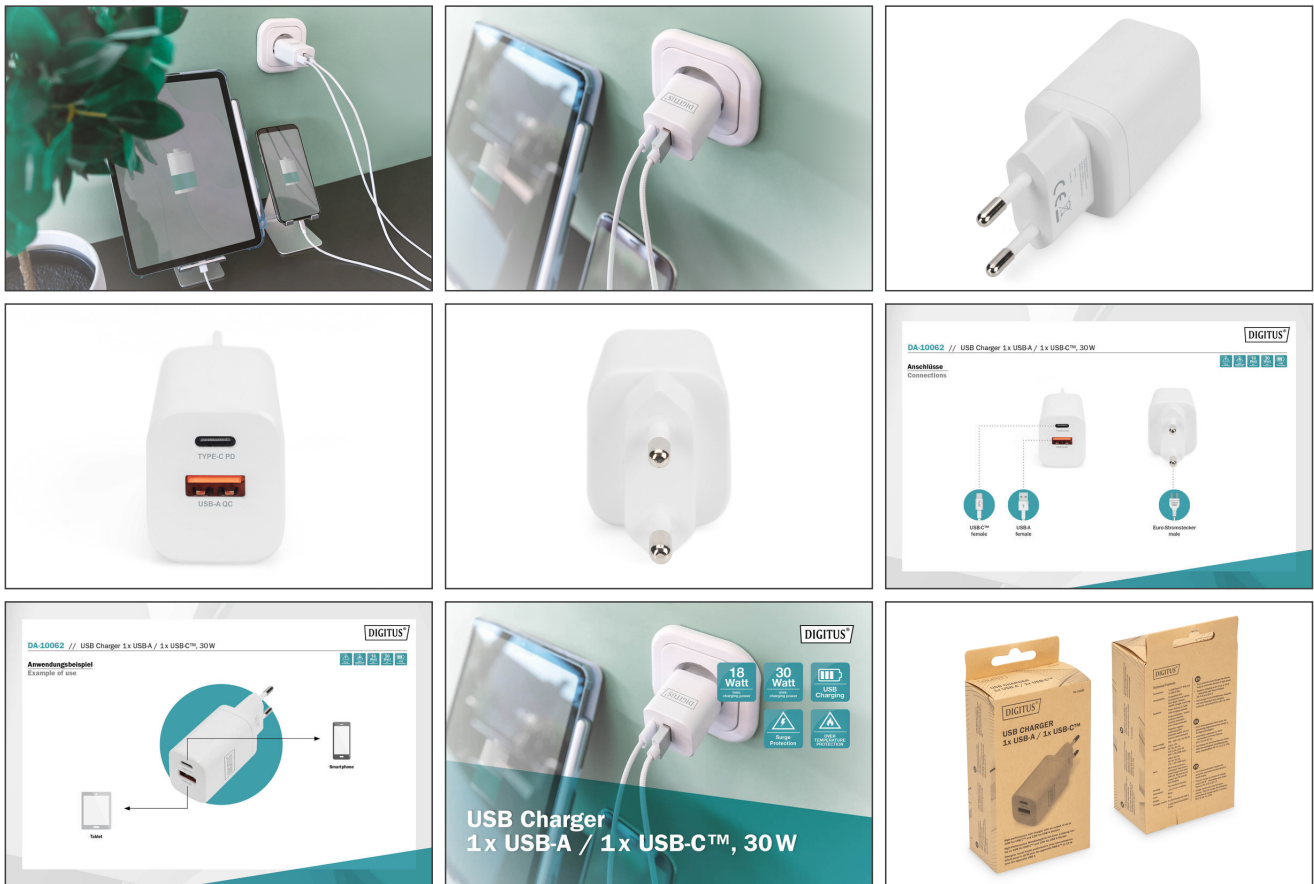

Safety notes

- Use charging adapters or power supply units in accordance with the instructions in the operating instructions to ensure optimum performance.
- Connect the charging adapter to an easily accessible socket in the voltage range between 100-240 V AC.
- Disconnect the charging adapter from the socket after use.
- Do not use the charging adapter with electronic devices that are outside the specifications of the charging adapter.
- Do not expose the device to rain, moisture, vapors or liquids.
- Do not insert any objects into the device.
- Do not attempt to repair the unit or open the housing without authorization. You risk an electric shock!
- Ensure adequate ventilation to prevent damage due to overheating.
- Dust, moisture, vapors and strong cleaning agents or solvents can cause damage to the device.
- Disconnect the appliance from the power supply and the connected devices before cleaning.
- Clean the device with a dust-free cloth.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com