

DIGITUS Višestruka utičnica s aluminijским profilom i integriranom prenaponskom zaštitom, 18-struka utičnica za zaštitnim kontaktom

A-19-STRIP42-1
EAN 4016032221203



KABEL 220/18 A-19-STRIP42-1 2x16A dual circuit, aluminum, 2x 16 A, circuit breaker

DIGITUS® višestruke utičnice savršeno su rješenje za Vaš mrežni ili serverski ormar veličine 482,6 mm (19"). Optimizirane za montažu u ormar, DIGITUS® višestruke utičnice s 220-240V pri 50-60 Hz nude Vam najbolje performanse uz odgovarajuće opterećenje. Svaka višestruka utičnica može se montirati u vertikalnom položaju. Ovisno o tipu ormara, postoji mogućnost pričvršćenja višestruke utičnice tako da prihvati bude okrenuti na desnu ili lijevu stranu.

- Prikladna za dva strujna kruga
- Maks. priključna snaga: 3600W/250V AC, 16A
- Aluminijски profil
- 2x kutni profili za montažu u ormar
- Plastične komponente od ABS plastike UL-94V-0
- Uzemljenje na aluminijском profilu
- Utičnice sa zaštitnim kontaktom okrenute za 35°

- Integrirana prenaponska zaštita 16A, 220/250V AC
- Vertikalna montaža
- Dimenzije: 1860 x 45 x 45 mm (VxŠxD)

Attributes



- Dodatne mogućnosti: Rastavljač strujnog kruga
- El. snaga: 3,6 kVA
- Faze: 1 fazni
- Izlazni priključci: CEE 7/3
- Struja: 16 A
- Ugrađivanje: Radna površina, Stalak 0U
- Ulazni utikač: CEE7/7
- Volti: 230 V


Package contents

- Scope of delivery: 1 socket strip, 2 mounting brackets; 1 safety instructions

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	4	11.16	184.50	30.00	15.00	83.03
Packaging Unit Inside	1	2.79	201.70	10.30	10.40	21,606.10
Packaging Unit Single	1	2.79	201.70	10.30	10.40	21,606.10
Net single without Packaging	0	2.79	188.20	8.50	4.60	7,358.62

More images:

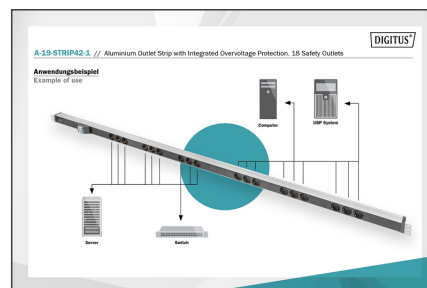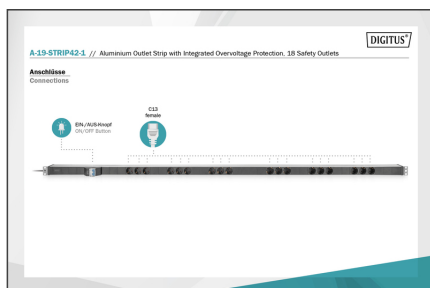

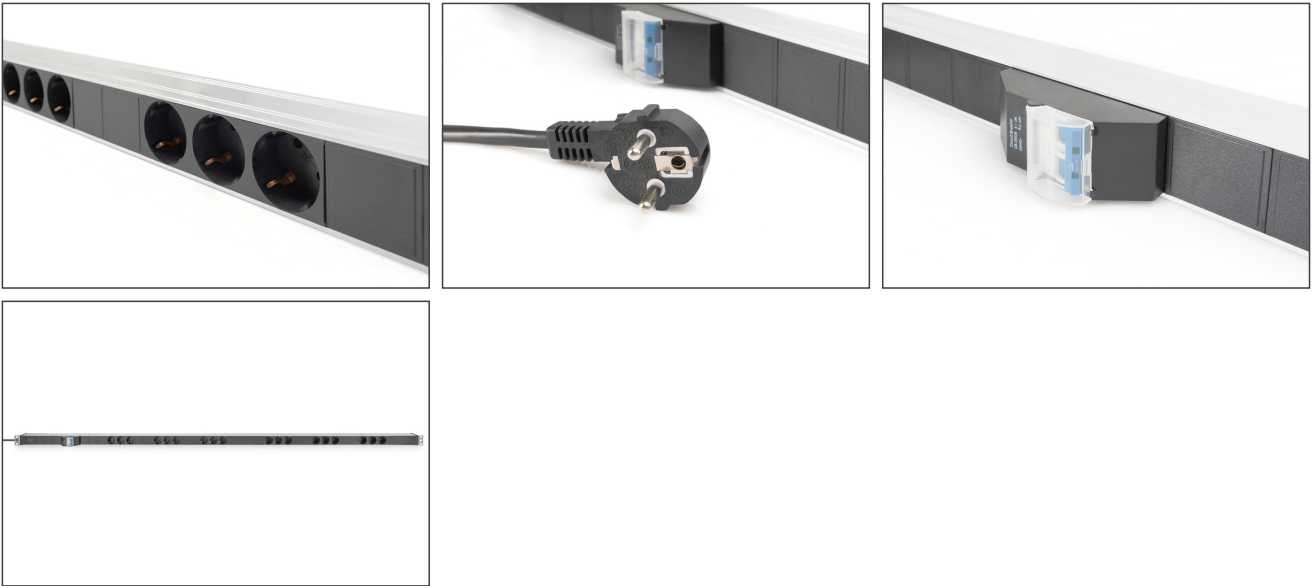**Safety notes**

- This product is not intended for unsupervised use by children or persons under their care!
- Prevent higher humidity or temperatures than those specified in the data sheet - Avoid moisture, dust or vapors, solvents, flammable gases.
- Multiple sockets are not designed for permanent use with heavy loads!
- Multiple sockets must not be cascaded (avoid stringing together several multiple sockets).
- The maximum connected load must not be exceeded.
- Defective multiple sockets must be taken out of service immediately and disposed of in an environmentally friendly manner.
- In the event of a fault, take the product out of operation and contact a qualified electrician.
- Do not open the product.
- Disconnect the product from the power supply before cleaning. Do not use any aggressive or abrasive cleaning agents for cleaning.
- The ingress of liquids can lead to a short circuit.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com