

DIGITUS Faixa de tomada alumínio DIGITUS com protecção de sobrecarga, 12 tomadas

DN-95405
EAN 4016032266433



1U Aluminum PDU, rackmountable, 12x safety outlet 2x 16A, 250VAC 50/60Hz, overload protection

As tomadas múltiplas DIGITUS® são a solução perfeita para o seu armário de servidor ou de rede de 19". Para otimização da montagem de armário, as tomadas múltiplas DIGITUS®, com 220-240 V a 50-60 Hz, proporcionam-lhe o melhor desempenho com carga de trabalho adequada. O material de montagem incluído de 19" garante uma fixação ideal às calhas de perfis dos seus armários. Cada tomada múltipla pode ser montada tanto na horizontal como na vertical, existindo a possibilidade de serem fixadas com os terminais para cima ou para baixo, conforme o tipo de armário.

Fonte de alimentação segura e profissional na área de 19"

- 2 circuitos com 12 tomadas 250VAC 50/60Hz / 2x 16A
- Perfil de alumínio
- 2x perfis de ângulo para montagem de armário



- Cabo de alimentação de 2 m H05VV-F 35 1,5 mm² como tomada elétrica de ligação terra
- Componentes de plástico de ABS UL-94V-0
- Ligação à terra no perfil de alumínio
- Tomadas elétricas com ligação terra rodadas a 35°
- 2x protecção de sobrecarga
- Instalação vertical
- Current: 16 A
- Input Plug: CEE7/7
- Installation: Rack 0U
- Outlets: CEE 7/3
- Phase: 1ph
- Power: 7,3 kVA
- Volts: 230 V



Package contents

- Scope of delivery: 1 socket strip, 2 mounting brackets; 1 safety instructions

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	10	23.15	95.00	24.50	42.00	97,755.00
Packaging Unit Inside	1	2.32	9.30	80.00	7.00	5,208.00
Packaging Unit Single	1	2.32	9.30	80.00	7.00	5,208.00
Net single without Packaging	1	1.41	4.50	75.80	4.50	0.00

More images:

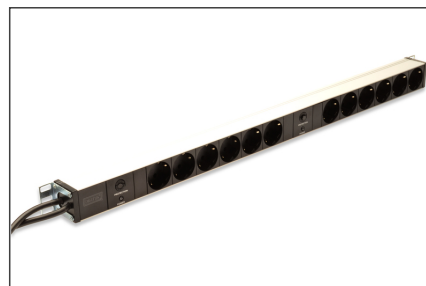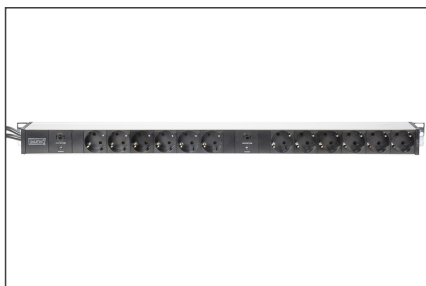

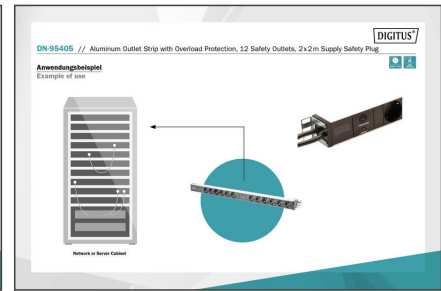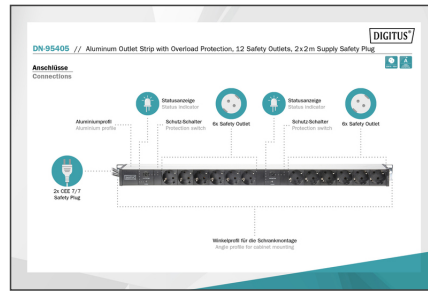

Safety notes

- This product is not intended for unsupervised use by children or persons under their care!
- Prevent higher humidity or temperatures than those specified in the data sheet - Avoid moisture, dust or vapors, solvents, flammable gases.
- Multiple sockets are not designed for permanent use with heavy loads!
- Multiple sockets must not be cascaded (avoid stringing together several multiple sockets).
- The maximum connected load must not be exceeded.
- Defective multiple sockets must be taken out of service immediately and disposed of in an environmentally friendly manner.
- In the event of a fault, take the product out of operation and contact a qualified electrician.
- Do not open the product.
- Disconnect the product from the power supply before cleaning. Do not use any aggressive or abrasive cleaning agents for cleaning.
- The ingress of liquids can lead to a short circuit.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com