

DIGITUS aluminium outlet strip, 3 safety outlets, 2 m supply safety plug

DN-95411
EAN 4016032280712



1U Aluminum PDU, 254 mm (10") rack mount 3x safety outlet, 16A, 4000W, 250VAC 50/60Hz

The DIGITUS® power distribution units are the perfect solution for your 10" network- or server cabinet. Optimized for rack installation with 220-240V 50-60 Hz the DIGITUS® PDU offer you the best performance with qualified efficiency. The 10" fixing material provides an optimized enclosing on the profile rails of your cabinets. Every PDU can be mounted horizontally as well as vertically and has the possibility, according to the cabinet, to be mounted faced up or down.

Safe and professional power in the 10" range

- 3 safety outlets 250VAC 50/60Hz / 16A / 4000W
- Aluminium profile
- 2x angle profiles for cabinet mounting

- 2 m Cable H05VV-F 3G1,5 mm² with safety plug
- Plastic components made by ABS UL-94V-0
- Grounding on aluminium profile
- 35° turned safety outlets
- 35° turned safety outlets
- Current: 16 A
- Input Plug: CEE7/7
- Installation: Desktop, Rack 0U, Rack 1U
- Outlets: CEE 7/3
- Phase: 1ph
- Power: 3,6 kVA
- Volts: 230 V
- Inch form factor (IEC 60297): 254 mm (10")


| Logistics | | | | | | |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------|
| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³ |
| Packaging Unit Carton | 20 | 13.80 | 48.00 | 37.00 | 31.50 | 55,944.00 |
| Packaging Unit Inside | 1 | 0.69 | 12.00 | 29.00 | 5.30 | 1,844.40 |
| Packaging Unit Single | 1 | 0.69 | 12.00 | 29.00 | 5.30 | 1,844.40 |
| Net single without Packaging | 1 | 0.49 | 4.60 | 24.40 | 4.60 | 0.00 |

More images:





**Aluminium Outlet Strip,
3 Safety Outlets,
2m Supply Safety Plug**

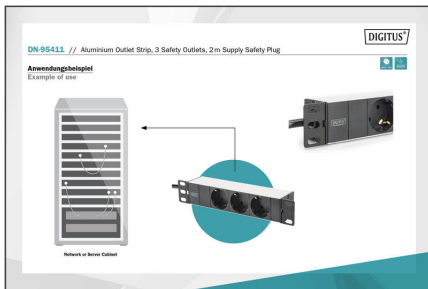

Safety notes

- This product is not intended for unsupervised use by children or persons under their care!
- Prevent higher humidity or temperatures than those specified in the data sheet - Avoid moisture, dust or vapors, solvents, flammable gases.
- Multiple sockets are not designed for permanent use with heavy loads!
- Multiple sockets must not be cascaded (avoid stringing together several multiple sockets).
- The maximum connected load must not be exceeded.
- Defective multiple sockets must be taken out of service immediately and disposed of in an environmentally friendly manner.
- In the event of a fault, take the product out of operation and contact a qualified electrician.
- Do not open the product.
- Disconnect the product from the power supply before cleaning. Do not use any aggressive or abrasive cleaning agents for cleaning.
- The ingress of liquids can lead to a short circuit.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com