

DIGITUS Инжектор PoE Ultra, 802.3at, 60 Вт

DN-95104
EAN 4016032375944



Gigabit Ethernet PoE+ Injector, 802.3at Power Pins:4/5(+),7/8(-) and 3/6(+), 1/2(-), 60W

Использование инжектора Digitus PoE позволяет сократить расход кабеля при установке устройств с поддержкой технологии PoE, например, сетевых IP-камер. Загрузка данных, а также электропитание устройств осуществляется только по сетевому кабелю Ethernet. Таким образом, пропадает необходимость прокладки отдельного кабеля электропитания, что позволяет усовершенствовать сеть также там, где отсутствуют розетки и кабели электропитания. Инжектор полностью соответствует стандарту IEEE802.3at Ultra PoE и обеспечивает выходную мощность в 60 Вт.

Позволяет сократить расход кабеля для беспроводных точек доступа, IP-телефонов и любых PoE-устройств.

- Соответствует стандартам 802.3at Ultra PoE и 802.3af PoE
- Удобное объединение кабелей электропитания и передачи данных в одном кабеле
- Позволяет усовершенствовать сеть там, где отсутствуют электрические розетки или кабели электропитания
- Не нуждается в конфигурации
- Поддерживает все PoE-устройства, соответствующие стандарту IEEE 802.3af (например, точки доступа, телефоны VoIP и IP-камеры)
- Дальность передачи – до 100 м; с дополнительным удлинителем PoE – до 400 м

- Потребляемая мощность: 1,6 Вт макс.
- Потребляемая мощность (с полной загрузкой): 10 Вт макс.
- Вход: 1 сетевой порт RJ-45 (передача данных)
- Выход: 1 сетевой порт RJ-45 (электропитание и передача данных)
- Выгрузка данных на выходе: 100/100/1000 Мбит/с Гигабит
- Выходная мощность: 60 Вт
- Напряжение на выходе: 55 В постоянного тока
- Диапазон рабочих температур: -10°C до +45°C
- Размеры: 193 мм x 85 мм x 41 мм
- Вес: 380 g
- Выход оснащен ограничителем тока нагрузки, предохранителем для защиты от коротких замыканий, а также функцией автоматического конечного распознавания и классификации устройства

Attributes


- PoE Power budget: 60 W
- PoE standard: IEEE802.3at (PoE+)
- Ethernet speed: Gigabit
- Industrial usage: no

Package contents

- Инжектор PoE
- Краткое руководство по установке
- Блок питания

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	40	24.10	52.50	30.00	44.00	69,300.00
Packaging Unit Inside	1	0.60	21.00	14.00	5.00	1,470.00
Packaging Unit Single	1	0.60	21.00	14.00	5.00	1,470.00
Net single without Packaging	1	0.42	19.30	8.50	4.00	0.00

More images:

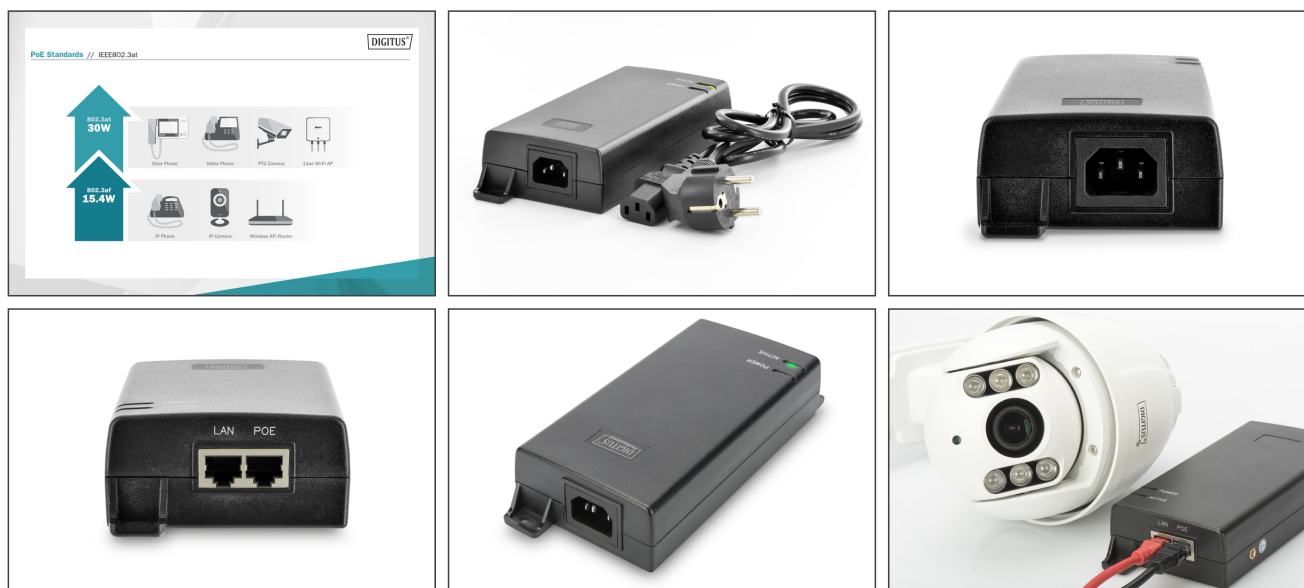

Safety notes

- This product is intended for indoor use only.
- Read all instructions and follow all warnings and instructions on the device.
- Do not place this appliance on an unstable surface (such as a trolley, stand, table, etc.).
- Do not use this appliance near water.
- Do not place this appliance near or above a radiator.
- The housing is equipped with openings for heat dissipation and ventilation. To prevent overheating during operation, the ventilation openings must not be blocked or covered.
- Do not place the appliance on a soft surface (e.g. bed, sofa, blanket, etc.). This will block the ventilation.
- The appliance must not be installed in a closed environment if adequate ventilation is not guaranteed.
- Do not spray any liquids onto the appliance.
- Disconnect the mains plug before cleaning. Do not use any liquid or foam cleaners.
- Clean the appliance with a damp cloth.
- Connect the device according to the power supply on the rating plate.
- To prevent damage to the appliance, it is important that all appliances are properly earthed.
- Do not place any objects on the power cable and lay it in such a way as to avoid tripping hazards.
- Use a surge protector, a regulator or an uninterruptible power supply (UPS) to protect your system from sudden, temporary and reduced power.
- Secure the system cable and mains cable properly and ensure that no objects are pressing on the cable.
- Do not insert any objects into the appliance through the openings in the housing. There is a risk of a short circuit, which can lead to fire or electric shock.
- Do not attempt to repair the appliance yourself. Always contact an authorized customer service centre.
- If any of the following conditions occur, unplug the appliance and return it to an authorized service centre for repair
- The mains cable, power supply unit or plug for the power supply is damaged or worn;
- Liquid has penetrated the appliance;
- The device has been exposed to rain or water;
- The device has been dropped or the housing has been damaged;
- The function of the device has obviously changed;
- The appliance cannot be operated as described in the operating instructions.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com