

# DIGITUS Tomada modular de parede DIGITUS CAT 6, Classe E, revestida

DN-9006/B5-N  
EAN 4016032175742



**CAT 6 wall outlet, shielded, 2x RJ45 8P8C, LSA, pure white, surface mount, set=5 pcs.**

The shielded CAT 6 network outlets from DIGITUS® are certificated to CAT 6 EIA/TIA 568 and ISO/IEC 11801, EN 50173. The cable installation takesplace via LSA strips, color coded acc. EIA/TIA 568 B with horizontal cable entry. All network outlets from DIGITUS® are available flush mount or surface mount.

**Melhor desempenho e melhor qualidade de ligação com a rede.**

- Características gerais:
- Instalação de cabo via réguas LSA, codificação de cor de acordo com EIA/TIA 568 A & B
- Instalação integrada de protecção de cabo
- Cor: Branco RAL9003


**Package contents**

- Tomada
- Instruções de Montagem

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	12	15.06	38.00	28.50	30.00	32,490.00
Packaging Unit Inside	1	1.26	9.00	24.50	9.50	2,094.75
Packaging Unit Single	1	1.26	9.00	24.50	9.50	2,094.75
Net single without Packaging	1	0.95	8.00	8.00	4.00	288.00

**More images:**

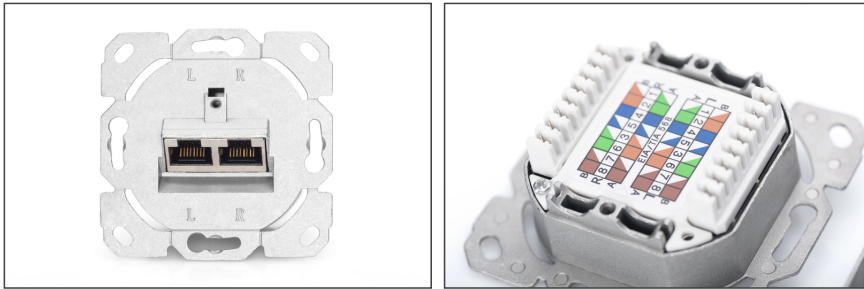

**Safety notes**

- Protect product from moisture
- Avoid antistatic charging when installing the product
- Observe the specifications of the raw cable manufacturer during installation

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)