

# DIGITUS Mini DisplayPort 3in1 Adapter / Converter

AK-340419-002-S  
EAN 4016032433804



**DisplayPort Converter Cable, Type mDP-HDMI,DVI,VGA M-F/F/F, 0.2m, 3in1 Multi-Media, gold, bl**

This adapter / converter allows you to operate your PC or laptop with DisplayPort on a screen with HDMI, DVI or VGA connection. This is ideal if you need to connect to different output devices such as field staff with different connections in different meeting rooms. It is also useful for private users who want to use monitors and TV sets with different inputs at home. The signal of DisplayPort is converted to HDMI, DVI or VGA signals. The Plug and Play feature works without driver installation, and power is supplied through the DisplayPort interface.

**Use HDMI, DVI or VGA devices on your DisplayPort. Save 3 single adapters and use this 3-in-1 converter cable.**

- Supports 4K/2K with 30Hz
- DisplayPort 1.2 data rate up to 5.4Gbit/s
- HDMI 1.4 data rate up to 3Gbit/s
- DVI & VGA interfaces support Full HD 1080P@60Hz
- VGA resolution up to WUXGA 1920x1200 dpi (reduced blanking)


- Plug and play installation

**Attributes**

- Assortment: DisplayPort Cables
- AWG: 28/30
- Color cable: black
- Color connector: black
- Connector 1: Mini DP, plug
- Connector 2: DP, jack + HDMI type A, jack + DVI-D, jack
- Connector surface: gold-plated
- DisplayPort standard: DisplayPort 1.2
- HDTV Standard: Ultra HD 4K
- Hoods: molded
- Interlock: none
- Packaging: Polybag
- Wire material: CU
- Length: 0.2 m
- AOC - Active Optical Cable: no
- Shielding: triple shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	200	10.60	38.00	30.00	31.00	35,340.00
Packaging Unit Inside	10	0.53	15.00	15.00	7.00	1,575.00
Packaging Unit Single	1	0.05	12.00	12.00	2.00	288.00
Net single without Packaging	1	0.05	28.50	4.00	1.60	0.00

**More images:**

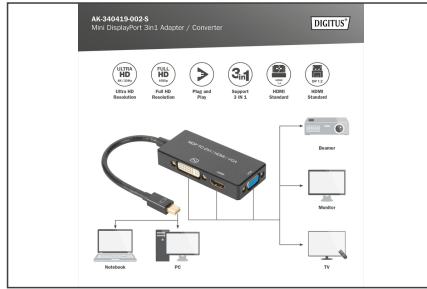

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)