


DIGITUS 1 экспресс-карта PCI, шина Firewire 1394a (3 +1 порт)

DS-30201-5
EAN 4016032442592

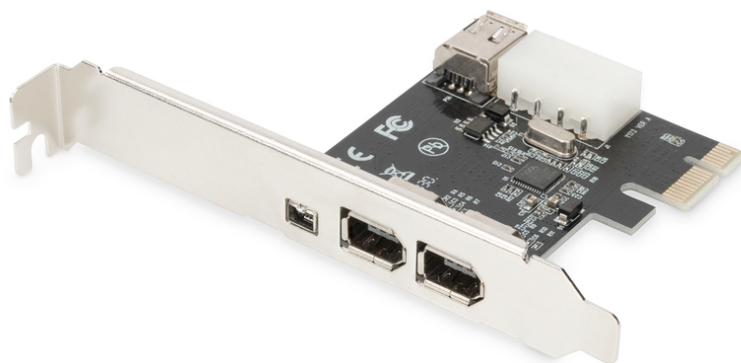

IEEE 1394a Interface Card, PCIexpress, 3 Port 1x ext. 1394mini, 2x ext. 1394a Ports

Контроллер Express IEEE 1394a/Firewire позволяет быстро и просто оборудовать систему ПК дополнительно тремя портами IEEE 1394! Вследствие этого контроллер поддерживает скорость передачи данных 100/200/400 Мбит/с и, благодаря встроенной функции горячей замены и Plug&Play, его можно установить в любой имеющийся слот PCI любой ширины.

ПК можно дополнительно оснастить тремя портами IEEE 1394!

- Два внешних разъема 1394a и один внешний 1394mini



- Установка в любом из доступных слотов PCI Express различной ширины
- Поддержка функции горячей замены и Plug&Play
- Скорость передачи данных 100/200/400 Мбит/с
- Рабочая температура: 0-70 °C
- Влажность воздуха при эксплуатации: Относительная влажность 25% - 65% (без конденсации)
- Поддержка Windows 10, 8, 7, Vista и XP


Package contents

- 1 экспресс-карта PCI, шина Firewire 1394a (3 +1 порт)
- 1 соединительный кабель Firewire 400, 4pin/M — 6pin/M, 0,7 м
- 1 низкопрофильная скобка
- Руководство по эксплуатации

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	40	8.40	38.00	28.00	30.00	31,920.00
Packaging Unit Inside	1	0.21	20.00	19.00	5.50	2,090.00
Packaging Unit Single	1	0.21	14.30	3.00	17.00	729.30
Net single without Packaging	1	0.04	9.50	18.00	1.90	0.00

More images:

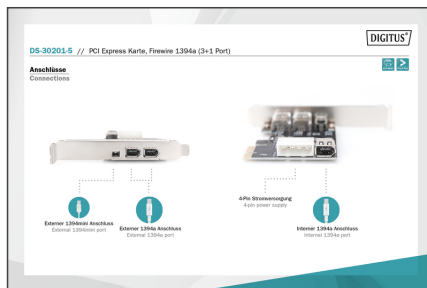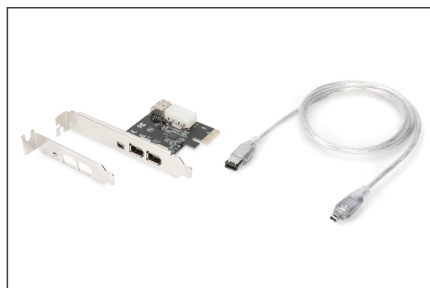

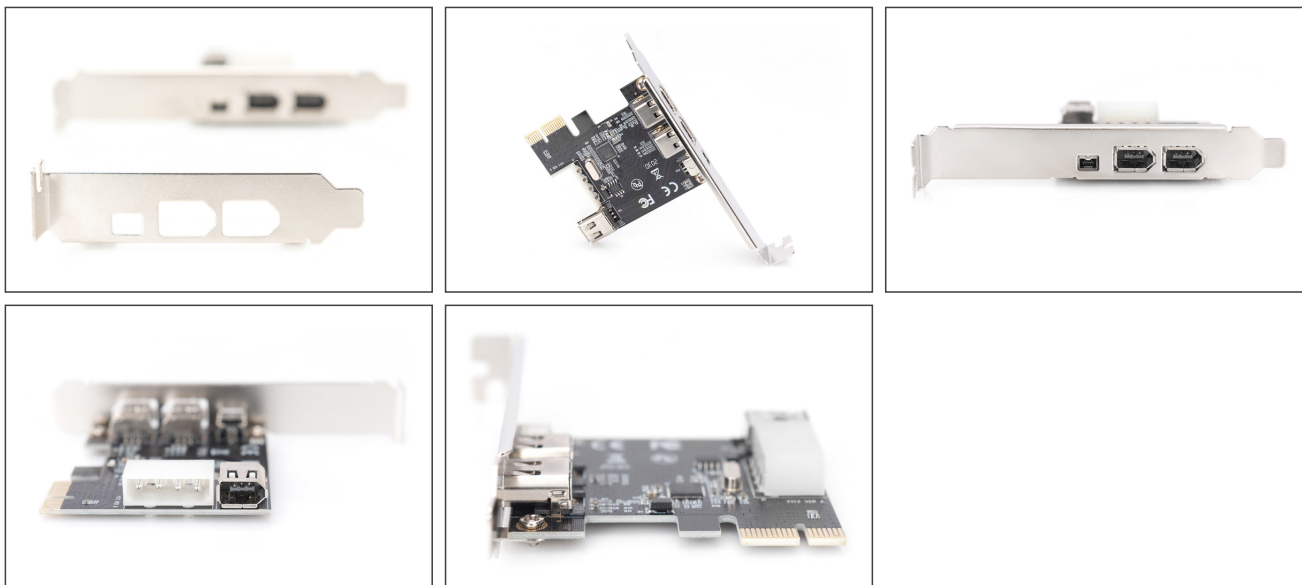**Safety notes**

- Switch off the computer completely and disconnect it from the power supply before installing or removing the network card.
- Static discharge can damage the product or the PC. Take measures against static discharge (ESD) when installing the product, e.g. wear an antistatic wrist strap.
- Before installation, touch the metal surface of the PC housing or another grounded object to ground any ESD charge via the housing.
- Avoid using too much force when connecting the product to the PC.
- Please ensure that any cables are connected correctly without overstretching or damaging them.
- Avoid touching the contacts of the product with your fingers to prevent corrosion or static charge.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com