

# DIGITUS DIGITUS двухсекционные стенные шкафы

DN-19 16-U-3  
EAN 4016032186755



**16U wall mounting cabinet, Unique, 820x600x600 mm double sectioned, pivotable, grey (RAL 7035)**

The network cabinets for wall installation from the Unique series were developed for especially convenient and flexible network cabling. Thanks to the integrated hinge in the back frame, the housing can be folded to the side if needed, for example in order to easily carry out assembly work in the back area of the cabinet. There is a sliding cable inlet with foam rubber seal in the roof of each cabinet. The back wall and floor plate are equipped with pre-cut cable inlets with a plastic cover. In addition, the back frame is equipped with brush management panels on the top and bottom. To accommodate a fan module, the roof structure is also equipped with a pre-cut area. One pair of galvanized 483 mm (19") profile rails labeled with rack units readable in both directions are installed on the inside. Their depth can be adjusted. The back frame also has a 483 mm (19") perforation. Each cabinet is made of up to 1.5 mm thick sheet steel. Coloring is done with electrostatic powder coating in the standard colors gray (RAL 7035) or jet black (RAL 9005). Removable and lockable side walls in a modular design as well as lockable and removable front door improve accessibility. The door hinges can be switched. Wall installation is accomplished in two easy work steps: The housing frame plate is bolted on the wall to open in either direction and then connected with the housing. With optionally available levelling feet or casters, the wall housings from the Unique series can also be used as a free-standing unit.

**Серия DIGITUS® Unique произведена с учетом высоких требований к решениям для ИТ-инфраструктуры и разработана по высочайшим немецким стандартам качества.**

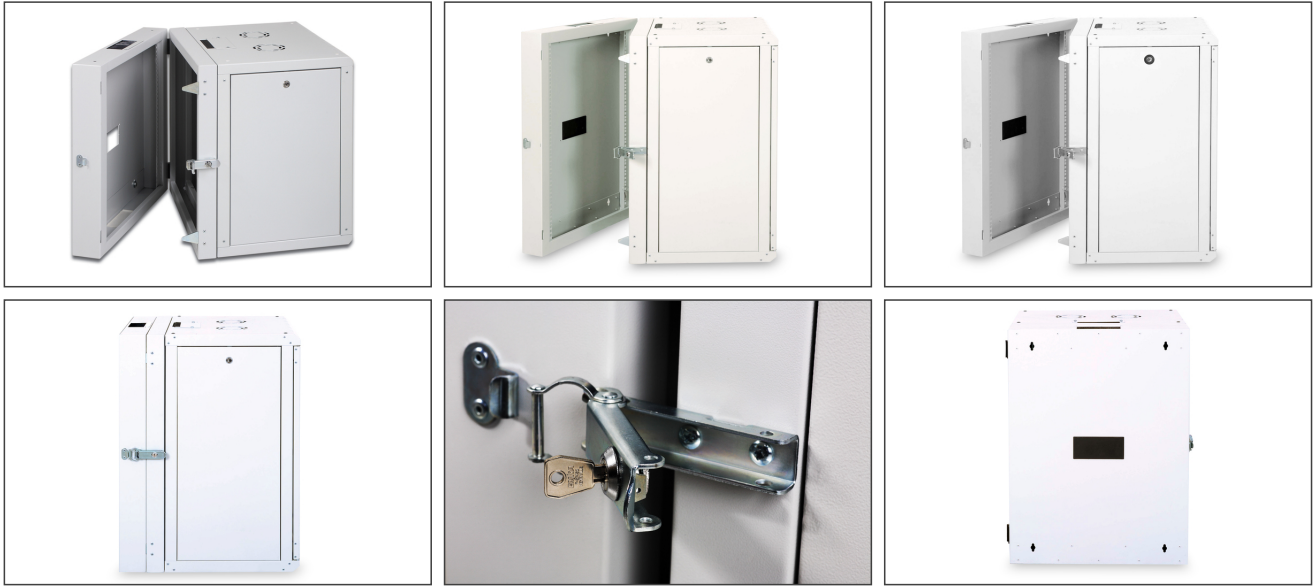
- Класс защиты IP20

- Запираемая стальная дверь с безопасным стеклом в стальной раме
- Наружная дверь с одноригельным замком
- Боковые части запираются и снимаются
- Профильные направляющие 483 мм (19") установлены на передней стороне внутри шкафа, гальванизированы
- Профильные направляющие 483 мм (19") регулируются по глубине установки и имеют маркировку высоты в монтажных единицах
- Стальной лист толщиной 1,1 - 1,5 обеспечивает высокую прочность, порошковое покрытие
- Верхняя панель подготовлена для установки вентиляционного элемента (выполнены отверстия)
- Вентиляционные отверстия для активной, а также пассивной вентиляции
- Шкаф оснащен различными точками заземления для встроенных компонентов
- Поставляется в сборе
- Cabinet type: Wall mounting cabinet
- Color: light grey, RAL 7035
- Depth: 600 mm
- Front door: Glass door, single opening
- Load capacity: 80 kg
- Side panels: Both sides
- Units: 16
- Width: 600 mm
- IP protection class: IP20
- Mounted: yes

**Package contents**

- Earthing wire set
- Installation set (screws, cage nuts, washers)
- 2 x Keys

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	51.80	65.00	65.00	87.00	367,575.00
Packaging Unit Inside	1	51.80	65.00	65.00	87.00	367,575.00
Packaging Unit Single	1	51.80	65.00	65.00	87.00	367,575.00
Net single without Packaging	1	50.80	60.00	60.00	82.00	351,780.00

**More images:****Safety notes**

- Ensure adequate ventilation to prevent the installed devices from overheating.
- Network cabinets should not be overfilled and the ventilation openings must not be blocked.
- Cables should be laid neatly and organized in cable ducts or trays.
- Use surge protection devices to protect sensitive devices from power surges or lightning strikes.
- Avoid moisture or wetness while observing the respective IP protection class.
- Ensure that the cabinet and the devices used are properly earthed.
- In regions with frequent thunderstorm activity, professional lightning protection should be integrated into the power supply.
- To avoid uneven loading, always mount the heaviest units at the bottom of the cabinet.
- Disconnect the installed devices from the power supply during maintenance or installation work.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)