

# DIGITUS aluminum outlet strip, 10 outlets, 2 m supply IEC C14 plug

DN-95404  
EAN 4016032266426



**1U Aluminum PDU, rackmountable 10A, 2500W, 250VAC 50/60Hz, overl-prot.,1xC14**

The DIGITUS® power distribution unit is the perfect solution for your network or server cabinet. In terms of power distribution, the PDU meets requirements of many applications in IT, network technology and laboratories. With its IEC60320 C13 input connector, the PDU can be ideally used as an additional 19" distribution for a UPS. The individual C13 outputs are equipped with a pull-out protection.

**Safe and professional power in the 482.6 mm (19") range**

- Pull-out protection on each output (for C13 standard cable)
- 10A input fuse protects against overload
- Horizontal 19" installation in the rack
- Housing: Aluminum profile
- Plastic components made of ABS UL-94V-0
- Input: IEC60320 C14 plug, 230 Vac / 10 A
- Output: appliance sockets 10 x IEC60320 C13, max. 10 A per output, integrated pull-out protection for each output

- Supply cable: cable cross-section: 1.5 mm<sup>2</sup>, length: 2 m
- Dimensions: 482.6 (19") x 45 x 45 mm (HxWxD)
- Approvals: CE mark

**Attributes**





- Current: 10 A
- Input Plug: IEC 60320 C14 inlet
- Installation: Rack 1U
- Outlets: IEC 60320 C13
- Phase: 1ph
- Power: 2,3 kVA
- Volts: 230 V
- Inch form factor (IEC 60297): 482.6 mm (19")

**Package contents**

- Scope of delivery: 1 socket strip, 2 mounting brackets; 1 safety instructions

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	20	21.00	104.00	46.00	27.00	129.17
Packaging Unit Inside	1	1.05	6.80	50.00	9.10	3.09
Packaging Unit Single	1	1.05	6.80	50.00	9.10	3.09
Net single without Packaging	0	0.73	4.40	48.20	4.50	954.36

**More images:**

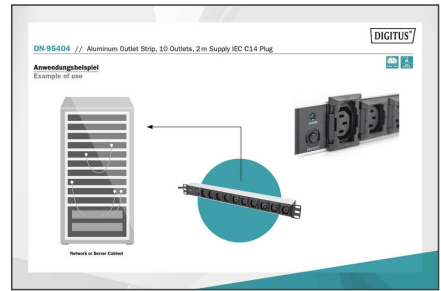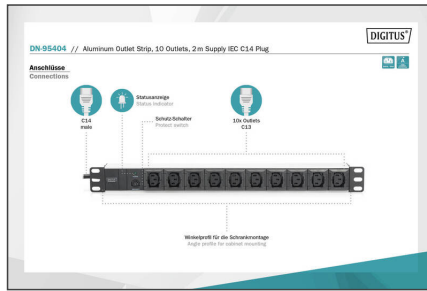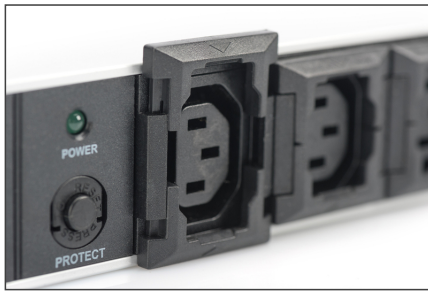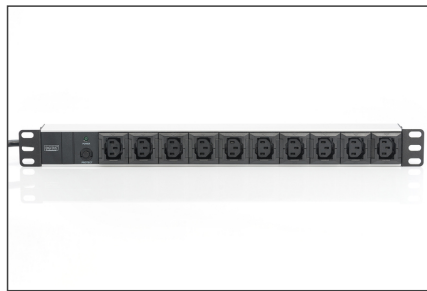

**Safety notes**

- This product is not intended for unsupervised use by children or persons under their care!
- Prevent higher humidity or temperatures than those specified in the data sheet - Avoid moisture, dust or vapors, solvents, flammable gases.
- Multiple sockets are not designed for permanent use with heavy loads!
- Multiple sockets must not be cascaded (avoid stringing together several multiple sockets).
- The maximum connected load must not be exceeded.
- Defective multiple sockets must be taken out of service immediately and disposed of in an environmentally friendly manner.
- In the event of a fault, take the product out of operation and contact a qualified electrician.
- Do not open the product.
- Disconnect the product from the power supply before cleaning. Do not use any aggressive or abrasive cleaning agents for cleaning.
- The ingress of liquids can lead to a short circuit.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)