

DIGITUS Višestruka utičnica s aluminijским profilom i zaštitom od preopterećenja, 12-struka utičnica sa zaštitnim kontaktom, dovodni vod 2 x 2 m s utikačem sa zaštitnim kontakto

DN-95405

EAN 4016032266433



KABEL 220/12 sa prenaponskom zaštitom 1U Aluminium 2x 16A, 250VAC 50/60Hz, overload protection

DIGITUS® višestruke utičnice savršeno su rješenje za Vaš mrežni ili serverski ormar veličine 482,6 mm (19"). Optimizirane za montažu u ormar, DIGITUS® višestruke utičnice s 220-240V pri 50-60 Hz nude Vam najbolje performanse uz odgovarajuće opterećenje. Svaka višestruka utičnica može se montirati u vertikalnom položaju. Ovisno o tipu ormara, postoji mogućnost pričvršćenja višestruke utičnice tako da prihvatni bude okrenuti na desnu ili lijevu stranu.

Sigurna i profesionalna opskrba strujom u području 482,6 mm (19")

- 2 kruga s po 6 utičnica sa zaštitnim kontaktom 250VAC 50/60Hz / 2x 16A
- Aluminijски profil
- 2x kutni profili za montažu u ormar
- Dovodni vod 2 m H05VV-F 35 1,5 mm² s utikačem sa zaštitnim kontaktom

- Plastične komponente od ABS plastike UL-94V-0
- Uzemljenje na aluminijском profilu
- Utičnice sa zaštitnim kontaktom okrenute za 35°
- 2x zaštita od preopterećenja
- Vertikalna montaža
- Dimenzije: 767,6 x 45 x 45 mm (VxŠxD)

Attributes


- El. snaga: 7,3 kVA
- Faze: 1 fazni
- Izlazni priključci: CEE 7/3
- Struja: 16 A
- Ugrađivanje: Stalak 0U
- Ulazni utikač: CEE7/7
- Volti: 230 V

Package contents

- Scope of delivery: 1 socket strip, 2 mounting brackets; 1 safety instructions

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	10	23.15	95.00	24.50	42.00	97.76
Packaging Unit Inside	1	2.32	9.30	80.00	7.00	5.21
Packaging Unit Single	1	2.32	9.30	80.00	7.00	5.21
Net single without Packaging	0	1.41	4.50	75.80	4.50	1,534.95

More images:

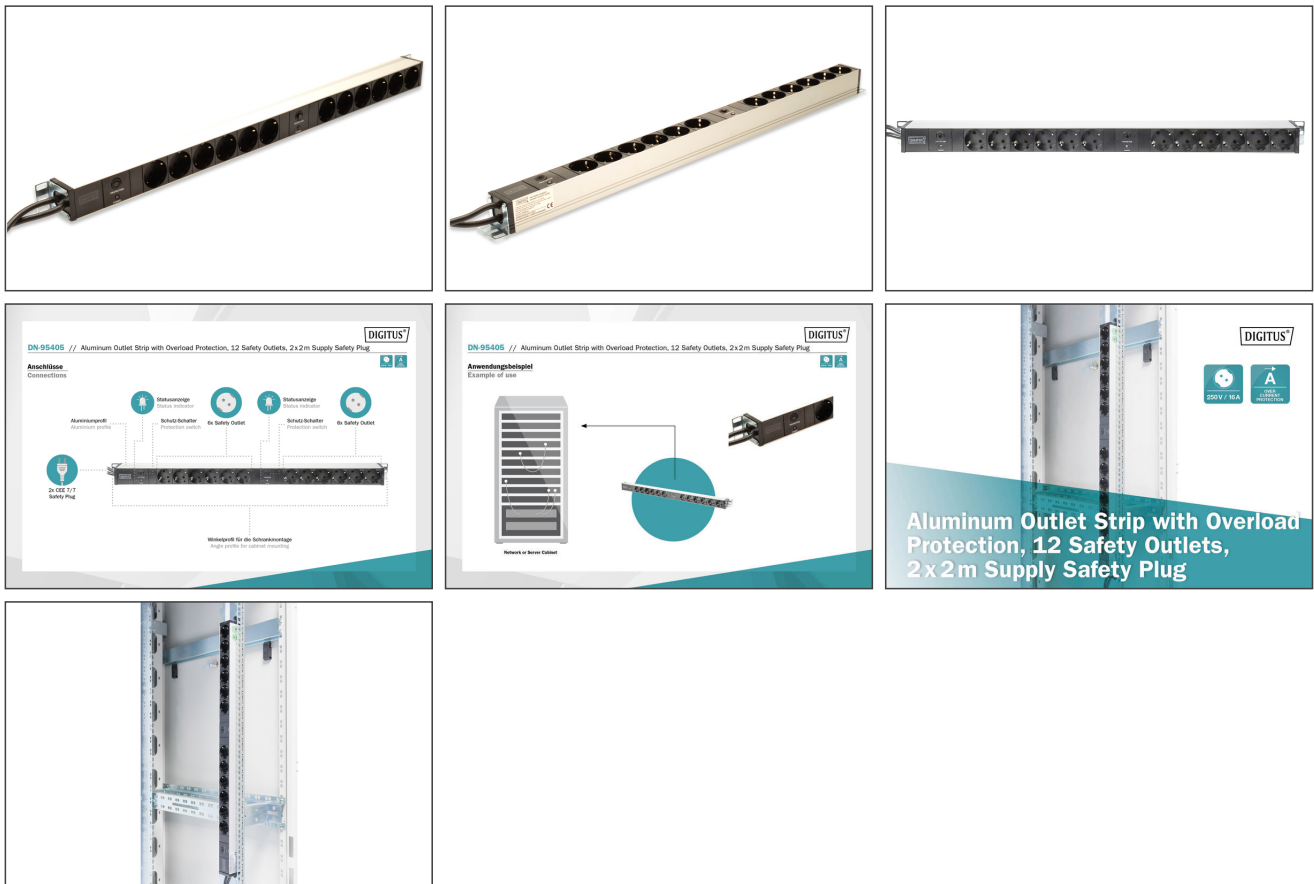

Safety notes

- This product is not intended for unsupervised use by children or persons under their care!
- Prevent higher humidity or temperatures than those specified in the data sheet - Avoid moisture, dust or vapors, solvents, flammable gases.
- Multiple sockets are not designed for permanent use with heavy loads!
- Multiple sockets must not be cascaded (avoid stringing together several multiple sockets).
- The maximum connected load must not be exceeded.
- Defective multiple sockets must be taken out of service immediately and disposed of in an environmentally friendly manner.
- In the event of a fault, take the product out of operation and contact a qualified electrician.
- Do not open the product.
- Disconnect the product from the power supply before cleaning. Do not use any aggressive or abrasive cleaning agents for cleaning.
- The ingress of liquids can lead to a short circuit.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com