

# DIGITUS VGA Splitter 350MHz, 2-Port

DS-41120-1  
 EAN 4016032323839



**VGA Splitter, 2-port, plastic housing 350 MHz, HDSUB 15/M -> 2x HDSUB 15/F, 1080p**

With a video splitter you can use one video source to display identical images on 2, 4, 8, or 16 monitors - or on even more screens by means of cascading. Thus, a video splitter can be used in various application fields, e.g. test bench facilities, data centers, help desks, video broadcasting, presentations and educational facilities.

**Provides simultaneous display on two different monitors - Perfect for classrooms, tradeshows, or in-store displays**

- Plastic housing
- Video bandwidth: 350MHz
- Max. resolution: 1920x1080p
- DDC, DDC2, DDC2B support

- Cascadable (max. 64)
- Max. transmission distance: 75m
- Video IN/OUT: HD DSUB, 15-pin, jacks

**Attributes**

- HDTV Resolution max.: 1920 x 1080 Pixel, 60Hz
- HDTV Standard: Full HD
- Number of ports: 2
- Signal input: VGA
- Signal output: VGA


**Package contents**

- VGA Splitter 350 MHz, 2-Port
- Manual

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	60	8.40	28.50	33.00	32.00	30.10
Packaging Unit Inside	1	0.14	3.20	13.50	10.50	453.60
Packaging Unit Single	1	0.14	3.20	13.50	10.50	453.60
Net single without Packaging	0	0.09	6.50	6.50	2.00	84.50

**More images:**

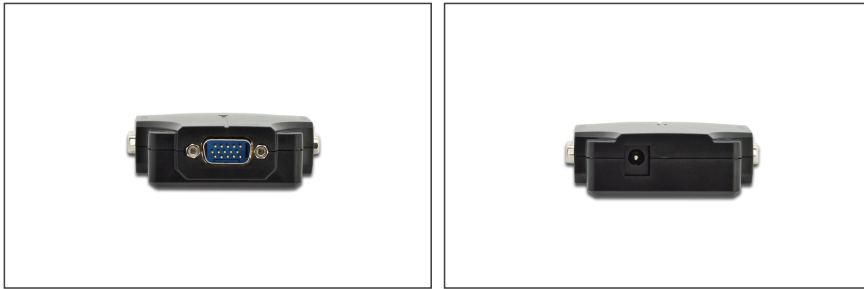

**Safety notes**

- If the device is powered by a plug-in power supply, ensure that the power adapter is connected correctly and meets the specified requirements (e.g. voltage and current).
- Only use certified CAT5e or CAT6 cables to ensure stable signal transmission.
- For particularly long cable runs or in environments prone to interference, it is recommended to use shielded network cables.
- Make sure that all connections are tight and secure to avoid loose contacts that could affect the signal quality. Make sure that the HDMI and Ethernet connections are connected correctly.
- Make sure that the CAT cable is not laid near high-voltage power lines or other strong sources of electromagnetic interference to avoid signal interference.
- Only operate the device within the specified temperature range.
- Do not use the device outdoors or in damp or wet environments
- Check all connections and cables regularly for wear or damage. Cables and connections can wear out, especially with frequent use or long installations, which can lead to poor signal quality or system failure.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)