

DIGITUS Aluminijski naponski panel sa osiguračem, sa 8 sigurnosnih utičnica, 2 m kabela i IEC C14 utikačem

DN-95410-R
EAN 4016032369721



KABEL 220/8 Digitus, 19" sa zaštitom kabel C14 crv. 10A Plug, 250VAC 50/60Hz, pre-fuse, IEC C14 plug

DIGITUS® naponski paneli idealno su rješenje za Vaše 19" komunikacijske ili serverske ormare. Optimizirani su za rack ugradnju, napajanje je 220-240V 50-60 Hz te nude najbolje performanse i učinkovitost. 19" materijal za fiksiranje osigurava optimalnu ugradnju opreme na vertikalnim nosačima Vaših ormara. Naponski paneli mogu se montirati na nekoliko načina: vodoravno, horizontalno, prema gore ili prema dolje, ovisno o potrebi.

Safe and professional power in the 482.6 mm (19") range

- 8x RED Socket outlets 250VAC 50/60Hz / 10A / 2500W
- Aluminum profile
- 35° turned outlets
- 2 metal fixings included


- Cable: 2 m H05VV-F 3G1,5 mm²
- IEC C14, plug
- Pre-fuse
- 35° turned safety outlets

Attributes

- El. snaga: 2,3 kVA
- Faze: 1 fazni
- Izlazni priključci: CEE 7/3
- Struja: 10 A
- Ugrađivanje: Radna površina, Stalak 0U, Stalak 1U
- Ulazni utikač: IEC 60320 C14 ulaz
- Volti: 230 V
- Inčni faktor oblika (IEC 60297): 482,6 mm (19")

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	10	9.64	53.00	28.50	25.00	37,762.50
Packaging Unit Inside	1	0.96	50.10	11.00	5.00	2,755.50
Packaging Unit Single	1	0.96	50.10	11.00	5.00	2,755.50
Net single without Packaging	0	0.70	46.00	4.50	4.50	931.50

More images:

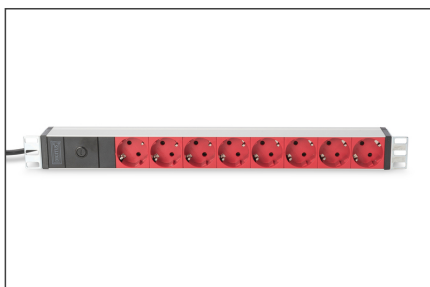

Safety notes

- This product is not intended for unsupervised use by children or persons under their care!
- Prevent higher humidity or temperatures than those specified in the data sheet - Avoid moisture, dust or vapors, solvents, flammable gases.
- Multiple sockets are not designed for permanent use with heavy loads!
- Multiple sockets must not be cascaded (avoid stringing together several multiple sockets).
- The maximum connected load must not be exceeded.
- Defective multiple sockets must be taken out of service immediately and disposed of in an environmentally friendly manner.
- In the event of a fault, take the product out of operation and contact a qualified electrician.
- Do not open the product.
- Disconnect the product from the power supply before cleaning. Do not use any aggressive or abrasive cleaning agents for cleaning.
- The ingress of liquids can lead to a short circuit.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com