

# DIGITUS USB-C™ Mini Charging Adapter, 20W

DA-10060  
EAN 4016032482703



### USB-C Mini Charging Adapter, 20W 20W, PD 3.0, white

The DIGITUS® MINI Charging Adapter is suitable for USB-C™ devices such as smartphones, tablets or notebooks and provides an output of up to 20W. The LED display provides information about the current charging status. Thanks to the super compact dimensions, the USB-C™ charger fits into any bag, making this charging adapter an ideal companion for everyday use. The integrated short circuit, surge and excess current protection provides added security. Furthermore, the integrated excess heat protection prevents potential overloads and damages to the charger or connected devices.

### Mini-USB charger with an output of up to 20W for USB-C™ devices of all kinds with numerous safety features

- Connection: USB Type-C™
- Compatible with smartphones with 20W charging adapted, e.g. from Apple, Huawei, XIAOMI, Google, Samsung smartphones and tablets

- Supports Power Delivery 3.0 with 20W charging capacity
- Input voltage: 100 - 240 V AC, 50/60 Hz
- Output voltage: 5V/3A, 9V/2.22A, 12V/1.67A (20W max.)
- Surge protection / excess current protection / overload protection / short circuit protection
- Protection against overheating with automatic switch-off and recovery (auto-recovery)
- Dimensions: L 30 x W 30 x H 67 mm
- Color: White
- Weight: 47 g
- Style: Charger/Power supply



### Package contents

- 1x USB-C Mini Charging Adapter
- QIG (Quick Installation Guide)

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	50	5.00	23.00	29.00	38.00	25.35
Packaging Unit Inside	1	0.10	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.10	4.00	7.00	14.00	392.00
Net single without Packaging	0	0.05	2.90	3.00	6.80	59.16

### More images:



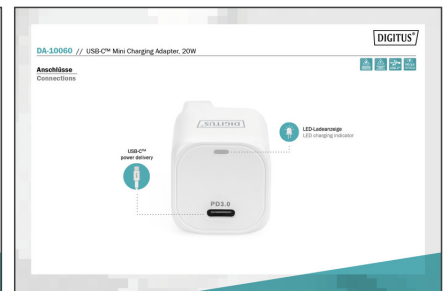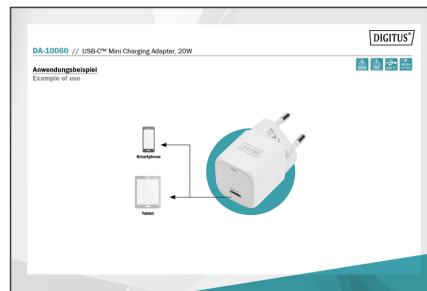

**Safety notes**

- Use charging adapters or power supply units in accordance with the instructions in the operating instructions to ensure optimum performance.
- Connect the charging adapter to an easily accessible socket in the voltage range between 100-240 V AC.
- Disconnect the charging adapter from the socket after use.
- Do not use the charging adapter with electronic devices that are outside the specifications of the charging adapter.
- Do not expose the device to rain, moisture, vapors or liquids.
- Do not insert any objects into the device.
- Do not attempt to repair the unit or open the housing without authorization. You risk an electric shock!
- Ensure adequate ventilation to prevent damage due to overheating.
- Dust, moisture, vapors and strong cleaning agents or solvents can cause damage to the device.
- Disconnect the appliance from the power supply and the connected devices before cleaning.
- Clean the device with a dust-free cloth.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)