


# DIGITUS Fiber Optic Patch Cord, E2000 (8° APC) to E2000 (8° APC), Singlemode

AL-9E2000-011  
EAN 4016032204725

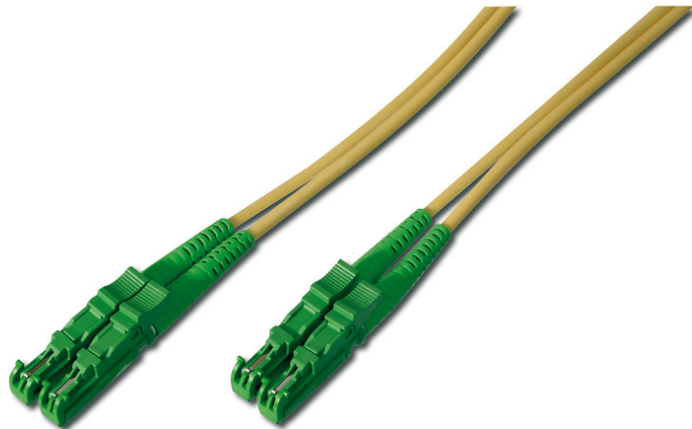

**FO patch cord, duplex, E2000 (APC) to E2000 (APC) R+M, SM OS2 09/125 μ, 1 m**

Assmann Professional offers a wide range of high quality fiber optic patch cables. Practically every request and every requirement is covered by the broad range of cable types. The product range includes OM1, OM2, OM3 and OS2 versions. Assmann fiber optic installation cables guarantee the best performance and fail-safety. All cables are single packed a polybag with test report.

**Cost reduction by verifiable quality and high performance.**

- Duplex cable
- LSOH
- Connector with ceramic ferrule

- Single packed with test-report
- Single packed with test-report
- Assortment: Fiber Optic Patch Cables
- Boot: single-color
- Cable type: I-VH 2E9/125μ
- Color cable: yellow
- Connector 1: E2000 (APC)
- Connector 2: E2000 (APC)
- Fiber class: OS2
- Fiber diameter: 9/125μ
- Mode: Singlemode
- Packaging: Polybag
- Length: 1 m

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	30	2.20	30.00	30.00	30.00	27,000.00
Packaging Unit Inside	1	0.07	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.07	20.00	19.00	1.00	380.00
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

**Safety notes**

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)