

DIGITUS Painel de conectores DIGITUS CAT 6, Classe E

DN-91624S
EAN 4016032241614



CAT 6 patch panel, shielded, 24-port RJ45 8P8C, LSA, 1U, rack mount, grey, 482x44x109 mm




The shielded CAT 6 Patch Panel from DIGITUS® is available as 16- or 24-port version. It is manufactured acc. to Link Performance Class E, for up to 250 MHz, EN 50173 and ISO/IEC 11801 and complies with the 802.3at PoE+ and the 802.3af PoE standard. The housing is made of 1.5 mm galvanized cold-rolled steel and is therefore perfectly suitable for 19" rack mounting.

Melhor desempenho e melhor qualidade de ligação com a rede.

- Características gerais:
- Instalação de cabo via réguas LSA, codificação de cor de acordo com EIA/TIA 568 A & B
- Ligação central à terra
- 360° cobertura revestida
- Cor: Cinza RAL7035
- Color: light grey, RAL 7035
- Ports: 24
- Units: 1
- Category: CAT 6

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	8	12.45	58.00	32.00	34.00	63,104.00
Packaging Unit Inside	1	1.56	7.50	56.00	15.00	6,300.00
Packaging Unit Single	1	1.56	51.50	5.50	13.50	3,823.88
Net single without Packaging	1	1.50	11.00	48.30	4.50	2,400.00

More images:

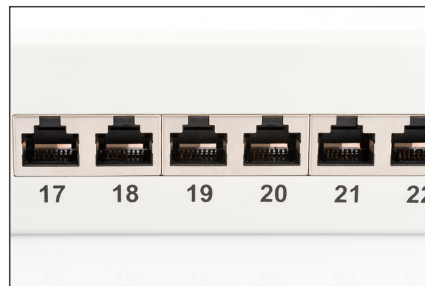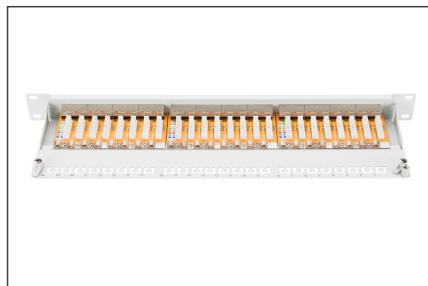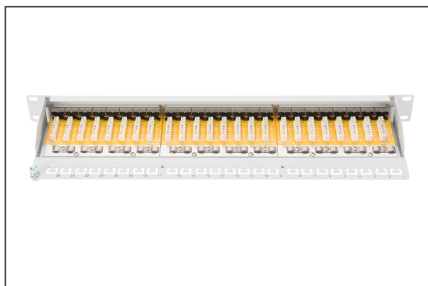

**Safety notes**

- Protect product from moisture
- Avoid antistatic charging when installing the product
- Observe the specifications of the raw cable manufacturer during installation

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com