


# DIGITUS colored pigtails, LC OM3 50/125 $\mu$ , Simplex

DK-25332-02/3  
EAN 4016032263005

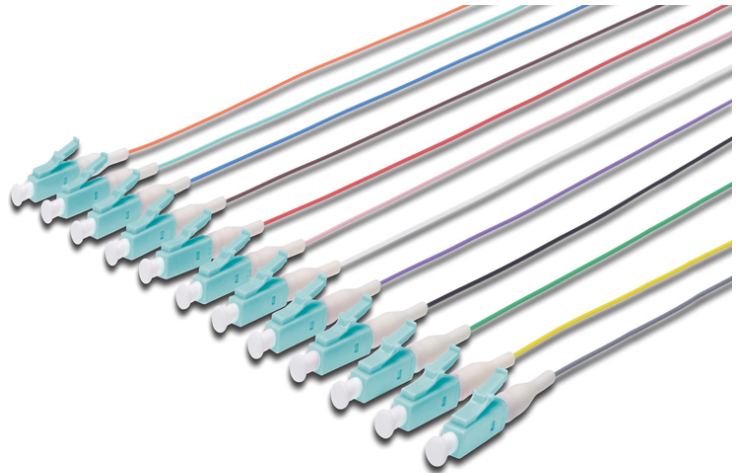

**FO pigtail set, 12 pcs., LC, MM OM3 50/125  $\mu$  loose buffer, color code DIN IEC 304, 2 m**

The DIGITUS® Fiber Optic Colored Pigtaills are available as LC Simplex, SC Simplex and ST Simplex version and offer with the classes OS2, OM2, OM3 and OM4 best performance and link quality for your network. The connector conforms acc. IEC 61754-4 2002 and is equipped with a Zirconia ceramic ferrule. The colored buffers are color coded according to IEC 304 (white, violet, turquoise, black, red, pink, orange, gray, green, yellow, brown, blue).

**Future-oriented standards and high-end quality for your network.**

- LC simplex pigtail, OM3 50/125  $\mu$  2 m
- Standard connector acc. IEC 61754-4 2002
- Operating temperature: -25 °C ... +80 °C
- Storage temperature: -20 °C ... +65 °C
- Insertion loss MM PC: max. 0.4 dB

- Return loss MM PC: > 25 dB
- Zirconia ceramic ferrule
- Secondary coating dimensions:  $\varnothing 0.9 \pm 0.1$  mm
- Primary coating: Acrylate;  $\varnothing 250 \pm 15$   $\mu$ m
- Colored buffer, according to IEC 304 in the colors white, violet, turquoise, black, red, pink, orange, grey, green, yellow, brown, blue
- 12 pcs in package
- Loose buffer
- Boot: single-color
- Cable jacket: LSOH
- Connector 1: LC
- Fiber class: OM3
- Fiber diameter: 50/125 $\mu$
- Mode: Multimode
- Length: 2 m

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	160	8.33	41.00	41.00	28.00	47,068.00
Packaging Unit Inside	20	1.04	19.00	19.00	12.00	4,332.00
Packaging Unit Single	1	0.05	17.00	17.00	1.00	289.00
Net single without Packaging	1	0.05	15.00	15.00	1.00	0.00