

DIGITUS Tomada múltipla com perfil de alumínio, tomadas elétricas com ligação terra de 8 vias, conector de segurança do cabo de alimentação de 2 m

DN-95403
EAN 4016032266419



1U Aluminum PDU, rackmountable, 7x safety outlet 16A, 4000W, 250VAC 50/60Hz, overload protection

As tomadas múltiplas DIGITUS® são a solução perfeita para o seu armário de servidor ou de rede de 19". Para otimização da montagem de armário, as tomadas múltiplas DIGITUS®, com 220-240 V a 50-60 Hz, proporcionam-lhe o melhor desempenho com carga de trabalho adequada. O material de montagem incluído de 19" garante uma fixação ideal às calhas de perfis dos seus armários. Cada tomada múltipla pode ser montada tanto na horizontal como na vertical, existindo a possibilidade de serem fixadas com os terminais para cima ou para baixo, conforme o tipo de armário.

Fonte de alimentação segura e profissional na área de 19"

- 7 tomadas 250VAC 50/60Hz/16A/4000W
- Perfil de alumínio
- 2x perfis de ângulo para montagem de armário


- Cabo de alimentação de 2 m H05VV-F 35 1,5 mm² como tomada elétrica de ligação terra
- Componentes de plástico de ABS UL-94V-0
- Ligação à terra no perfil de alumínio
- Tomadas elétricas com ligação terra rodadas a 35°
- Protecção contra sobrecarga



Attributes

- Additional Features: Power switch
- Current: 16 A
- Input Plug: CEE7/7
- Installation: Desktop, Rack 0U, Rack 1U
- Outlets: CEE 7/3
- Phase: 1ph
- Power: 3,6 kVA
- Volts: 230 V
- Inch form factor (IEC 60297): 482.6 mm (19")

| Logistics | | | | | | |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm ³ |
| Packaging Unit Carton | 10 | 10.50 | 51.00 | 46.00 | 27.00 | 63,342.00 |
| Packaging Unit Inside | 1 | 1.05 | 6.70 | 50.00 | 9.10 | 3,048.50 |
| Packaging Unit Single | 1 | 1.05 | 6.70 | 50.00 | 9.10 | 3,048.50 |
| Net single without Packaging | 1 | 0.76 | 4.40 | 48.20 | 4.40 | 0.00 |

More images:

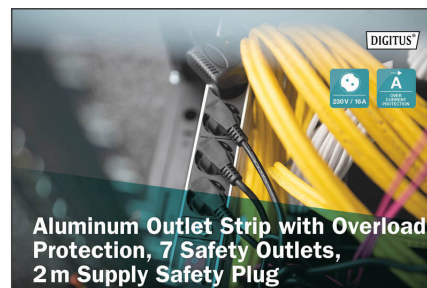

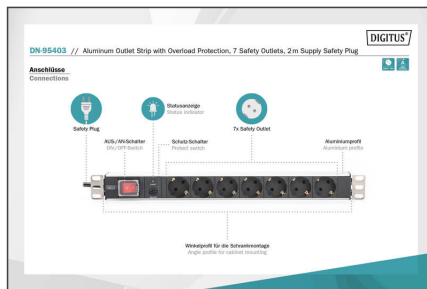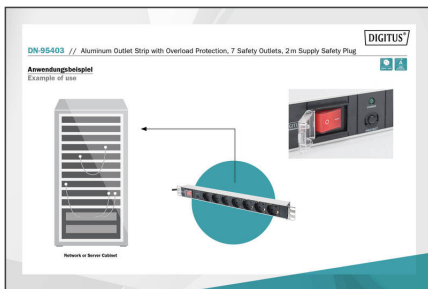

Safety notes

- This product is not intended for unsupervised use by children or persons under their care!
- Prevent higher humidity or temperatures than those specified in the data sheet - Avoid moisture, dust or vapors, solvents, flammable gases.
- Multiple sockets are not designed for permanent use with heavy loads!
- Multiple sockets must not be cascaded (avoid stringing together several multiple sockets).
- The maximum connected load must not be exceeded.
- Defective multiple sockets must be taken out of service immediately and disposed of in an environmentally friendly manner.
- In the event of a fault, take the product out of operation and contact a qualified electrician.
- Do not open the product.
- Disconnect the product from the power supply before cleaning. Do not use any aggressive or abrasive cleaning agents for cleaning.
- The ingress of liquids can lead to a short circuit.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com