

# DIGITUS Tomada múltipla com perfil de alumínio, tomadas elétricas com ligação terra de 8 vias, conector de segurança do cabo de alimentação de 2 m

DN-95404  
EAN 4016032266426



**1U Aluminum PDU, rackmountable, 10x IEC C13 10A, 2500W, 250VAC 50/60Hz, overl-prot.,1xC14**

As tomadas múltiplas DIGITUS® são a solução perfeita para o seu armário de servidor ou de rede de 19". Para otimização da montagem de armário, as tomadas múltiplas DIGITUS®, com 220-240 V a 50-60 Hz, proporcionam-lhe o melhor desempenho com carga de trabalho adequada. O material de montagem incluído de 19" garante uma fixação ideal às calhas de perfis dos seus armários. Cada tomada múltipla pode ser montada tanto na horizontal como na vertical, existindo a possibilidade de serem fixadas com os terminais para cima ou para baixo, conforme o tipo de armário.

**Fonte de alimentação segura e profissional na área de 19"**

- 8x tomadas elétricas com ligação terra 250 VCA 50/60 Hz / 16 A / 4000 W
- Perfil de alumínio
- 2x perfis de ângulo para montagem de armário
- Cabo de alimentação de 2 m H05VV-F 35 1,5 mm<sup>2</sup> como tomada elétrica de ligação C14

- Componentes de plástico de ABS UL-94V-0
- Ligação à terra no perfil de alumínio
- Tomadas elétricas com ligação terra rodadas a 35°
- Protecção contra sobrecarga
- Protecção contra sobrecarga

**Attributes**





- Current: 10 A
- Input Plug: IEC 60320 C14 inlet
- Installation: Rack 1U
- Outlets: IEC 60320 C13
- Phase: 1ph
- Power: 2,3 kVA
- Volts: 230 V
- Inch form factor (IEC 60297): 482.6 mm (19")

**Package contents**

- Scope of delivery: 1 socket strip, 2 mounting brackets; 1 safety instructions

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	20	21.00	104.00	46.00	27.00	129,168.00
Packaging Unit Inside	1	1.05	6.80	50.00	9.10	3,094.00
Packaging Unit Single	1	1.05	6.80	50.00	9.10	3,094.00
Net single without Packaging	1	0.73	4.40	48.20	4.50	0.00

**More images:**

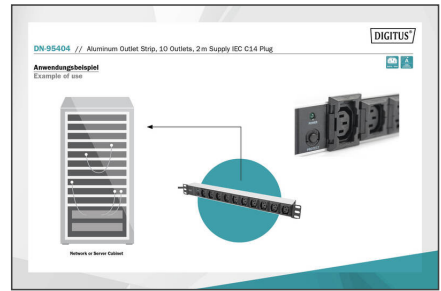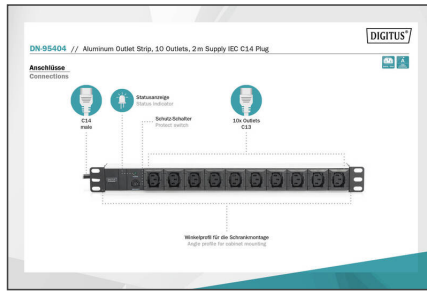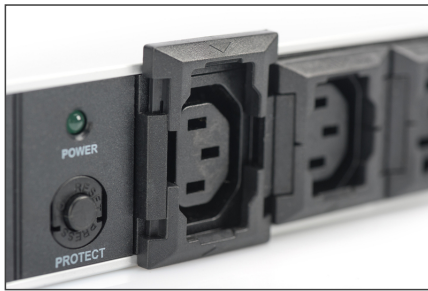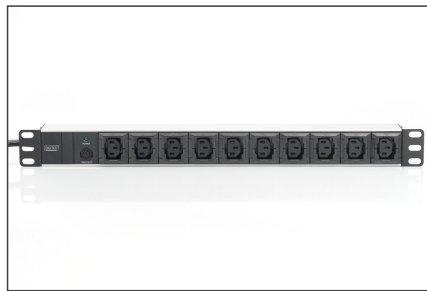

**Safety notes**

- This product is not intended for unsupervised use by children or persons under their care!
- Prevent higher humidity or temperatures than those specified in the data sheet - Avoid moisture, dust or vapors, solvents, flammable gases.
- Multiple sockets are not designed for permanent use with heavy loads!
- Multiple sockets must not be cascaded (avoid stringing together several multiple sockets).
- The maximum connected load must not be exceeded.
- Defective multiple sockets must be taken out of service immediately and disposed of in an environmentally friendly manner.
- In the event of a fault, take the product out of operation and contact a qualified electrician.
- Do not open the product.
- Disconnect the product from the power supply before cleaning. Do not use any aggressive or abrasive cleaning agents for cleaning.
- The ingress of liquids can lead to a short circuit.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)