

# DIGITUS Cabo de ligação USB 2.0

AK-300101-050-S  
EAN 4016032282617



**USB 2.0 connection cable, type A M/M, 5.0m, USB 2.0 conform, bl**

Para a ligação de equipamentos terminais USB externos (com conector fêmea A) ao anfitrião USB (p. ex. computador, computador portátil ou concentrador USB). Taxa de transferência até 480 Mbps (High Speed).



**Permite uma ligação fiável e rápida de dispositivos externos USB ao PC, também numa extensão de distâncias maiores.**

- Assortment: USB Cables
- AWG: 28
- Color cable: black

- Color connector: black
- Connector 1: USB A, plug
- Connector 2: USB A, plug
- Connector surface: nickel-plated
- Ferrite filter: none
- Hoods: molded
- USB compliance: USB 2.0
- Wire material: CU
- Length: 5 m
- Shielding: Double shielding

| Logistics                    |              |             |            |            |             |                 |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm <sup>3</sup> |
| Packaging Unit Carton        | 140          | 14.58       | 32.00      | 45.00      | 25.00       | 36,000.00       |
| Packaging Unit Inside        | 5            | 0.52        | 2.00       | 16.00      | 18.00       | 576.00          |
| Packaging Unit Single        | 1            | 0.10        | 2.50       | 11.50      | 21.00       | 603.75          |
| Net single without Packaging | 1            | 0.09        | 2.50       | 13.00      | 12.00       | 0.00            |

More images:

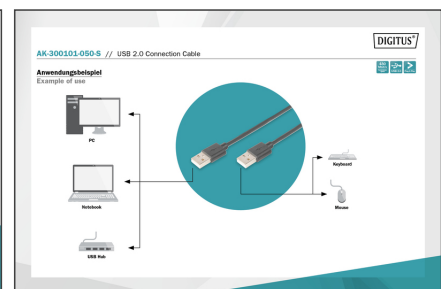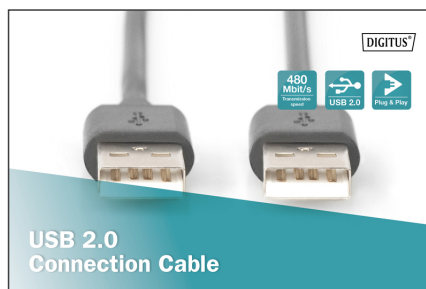

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)