

# DIGITUS Соединительный кабель USB 2.0

AK-300108-018-S  
EAN 4016032282907



**USB 2.0 connection cable, type A - mini B (5pin) M/M, 1.8m, USB 2.0 conform, b1**

Для подсоединения внешнего концевое устройства USB (с гнездом мини-B (5-контактным), например, МПЗ-плеера, смартфона или внешнего жесткого диска) к USB-хосту (например, ПК, ноутбуку или USB-хабу). Скорость передачи до 480 Мбит/с (High-Speed).



**Позволяет осуществить надежное и быстрое подключение внешних USB-устройств к ПК.**

- Скорость передачи данных до 480 Мбит/с
- Входное напряжение до 5 В / 0,5 А и 2,5 Вт
- Медные жилы с экранированием из фольги и оплетки обеспечивают прочность и надежное соединение

- Assortment: USB Cables
- AWG: 28
- Color cable: black
- Color connector: black
- Connector 1: USB A, plug
- Connector 2: Mini USB B, 5-pin, plug
- Connector surface: nickel-plated
- Ferrite filter: none
- Hoods: molded
- USB compliance: USB 2.0
- Wire material: CU
- Length: 1.8 m
- Shielding: Double shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	300	13.58	25.00	45.00	32.00	36,000.00
Packaging Unit Inside	10	0.45	36.00	27.00	5.00	4,860.00
Packaging Unit Single	1	0.05	21.00	11.50	0.50	120.75
Net single without Packaging	1	0.04	10.50	11.00	1.50	0.00

More images:

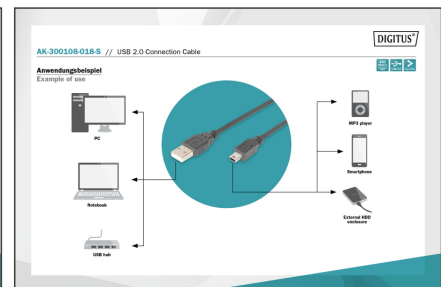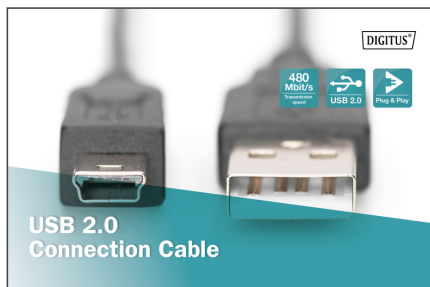

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)