

# DIGITUS Cabo ligação USB 3.0, A/M - micro B/M, alta qualidade

AK-300116-010-S  
EAN 4016032283287



**USB 3.0 connection cable, type A - micro B M/M, 1.0m, USB 3.0 conform, b1**

Para a ligação de equipamentos terminais externos USB 3.0 (com conector fêmea micro B, p. ex., caixa de disco rígido externo, leitor MP3 ou Smartphone) ao anfitrião USB (p. ex. computador, computador portátil ou concentrador USB). Taxa de transferência até 5 Gbps (Super Speed).




**A blindagem densa permite uma ligação rápida e fiável dos dispositivos externos USB 3.0 com PC, também para longas distâncias.**


**Attributes**

- Assortment: USB Cables
- AWG: 28
- Color cable: black
- Color connector: black
- Connector 1: USB A, plug
- Connector 2: Micro USB B, plug
- Connector surface: nickel-plated
- Ferrite filter: none
- Hoods: molded
- USB compliance: USB 3.0 / 3.1
- Wire material: CU
- Length: 1 m
- Shielding: triple shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	200	12.00	46.00	33.00	27.00	40,986.00
Packaging Unit Inside	10	0.60	34.00	21.00	5.00	3,570.00
Packaging Unit Single	1	0.06	18.00	15.00	2.00	540.00
Net single without Packaging	1	0.05	13.50	12.00	1.50	0.00

**More images:**

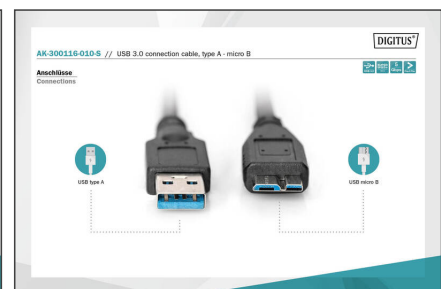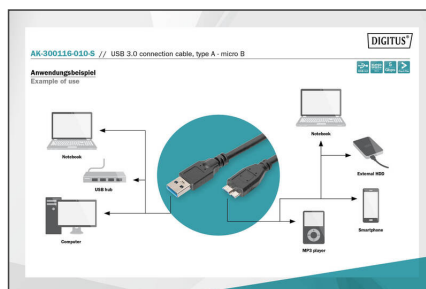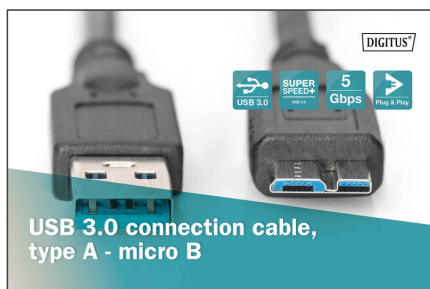

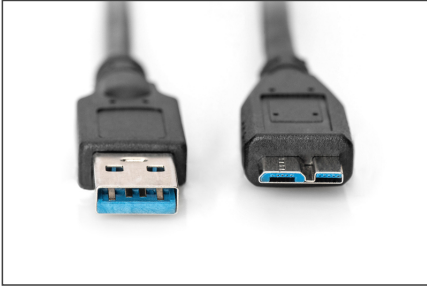**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)