


# DIGITUS Cabo do suporte do encaixe USB

**AK-300301-002-E**  
**EAN 4016032283423**

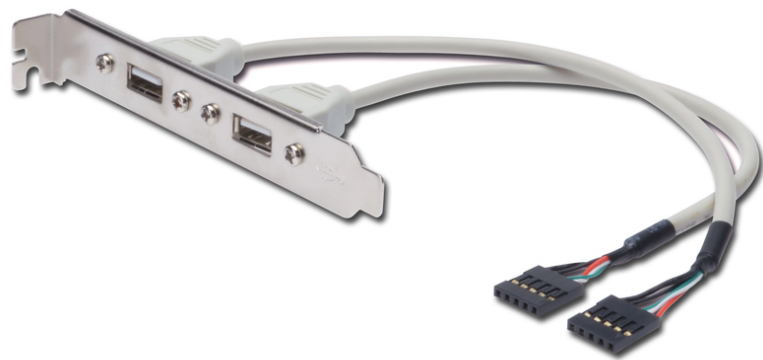

**USB Slot Bracket cable, 2x type A-2x5pin IDC F/F, 0.25m, USB 2.0 compatível, be**

Para estabelecer uma ligação entre a interface USB da placa-mãe e as portas externas USB no suporte do encaixe. Velocidade de transferência de dados até 480 Mbps (Alta-Velocidade).

**Permite uma ligação fiável e rápida de dispositivos externos USB ao PC, também numa extensão de distâncias maiores.**

- Assortment: USB Cables
- AWG: 28

- Color cable: beige
- Color connector: beige
- Connector 1: 2 x USB A, jack
- Connector 2: 2 x IDC (5-pin), connector
- Connector surface: nickel-plated
- Hoods: molded
- USB compliance: USB 2.0
- Wire material: CU
- Length: 0.25 m
- Shielding: Double shielding

| Logistics                    |              |             |            |            |             |                 |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm <sup>3</sup> |
| Packaging Unit Carton        | 100          | 5.90        | 38.00      | 31.00      | 22.00       | 25,916.00       |
| Packaging Unit Inside        | 10           | 0.59        | 22.00      | 20.00      | 6.00        | 2,640.00        |
| Packaging Unit Single        | 1            | 0.06        | 15.50      | 13.50      | 2.50        | 523.13          |
| Net single without Packaging | 1            | 0.05        | 12.30      | 10.50      | 2.00        | 0.00            |

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)