

# DIGITUS USB 2.0 Connection Cable, USB A to USB B

DB-300102-018-S  
EAN 4016032284833



**USB connection cable, type A - B M/M, 1.8m, USB 2.0 compatible, bl**

For connection of external USB end devices with USB-B jack (e.g. external hard drive enclosures, scanners or printers) to the USB host (e.g. PC, notebook or USB hub). Transmission speeds of up to 480 Mbps (High-Speed) possible With the DIGITUS® USB 2.0 connection cable (USB A to USB B), it is also possible to operate devices with older USB standards, backwards compatible with USB standards 1.1 and 1.0. The gold-plated contact surfaces ensure loss-free data transfer.

**Connect your devices to your PC quickly and without a great deal of effort**

**Attributes**



- Assortment: USB Cables
- Color cable: black
- Color connector: black
- Connector 1: USB A, plug
- Connector 2: USB B, plug
- Connector surface: gold-plated
- Hoods: molded
- USB compliance: USB 2.0
- Length: 1.8 m


**Package contents**

- 1 x USB 2.0 Connection Cable, USB A to USB B

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	252	30.10	54.00	40.00	29.00	62,640.00
Packaging Unit Inside	6	0.72	29.00	17.00	19.00	9,367.00
Packaging Unit Single	1	0.12	10.00	7.50	3.00	225.00
Net single without Packaging	1	0.08	12.00	1.00	10.00	0.00

**More images:**

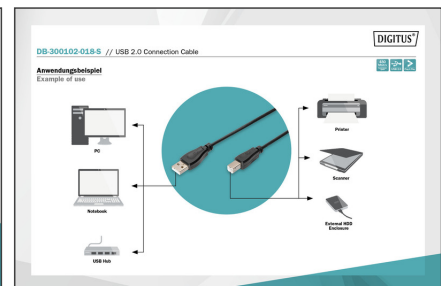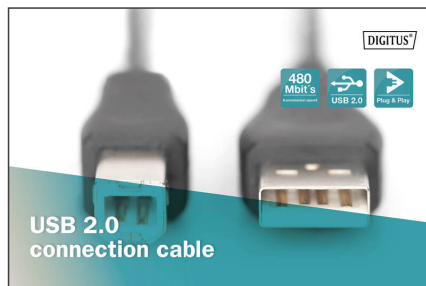

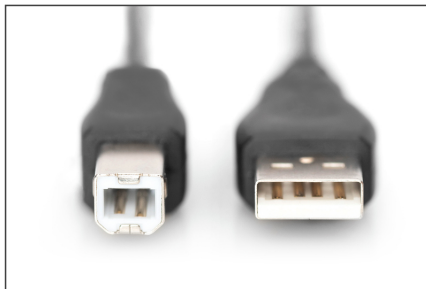

### Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable.
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

### EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)