

# DIGITUS DVI удлинитель по Cat.5 / Cat.6

DS-54101  
EAN 4016032285694



**DVI Video Extender over Cat5 up to 70m (CAT5, UTP), max. res. 1920X1200@60Hz**

DVI удлинитель по CAT5 увеличивает дальность передачи DVI сигнала от вашего ПК на расстояние до 70 метров с помощью обычного кабеля Cat.5 / Cat.6. Возможное видео разрешение зависит от дальности передачи сигнала.

**Передаёт DVI сигнал на расстояние до 70 метров**


- DVI-D удлинитель по кабелю Cat5 / Cat6
- Поддерживает макс. разрешение до 1920 x 1200 пикселей на расстоянии до 50 м.

- Поддерживает макс. расстояние до 70 метров при разрешении 800x600 пикселей
- Не требуется внешний блок питания
- HDTV Resolution max.: 1920 x 1200 Pixel, 60Hz
- HDTV Standard: Full HD
- Category: CAT 5e
- Distance: 50 m
- KVM: no
- PoE (Power over Ethernet): no
- Transmission technology: CAT

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	100	10.80	33.50	37.00	27.50	34,086.20
Packaging Unit Inside	1	0.11	4.90	8.60	6.30	265.48
Packaging Unit Single	1	0.11	5.00	8.50	6.00	255.00
Net single without Packaging	1	0.03	5.60	4.00	2.30	187.50

**More images:**

VIDEO VERLÄNGERUNGEN VIDEO EXTENSIONS	
<b>HDMI</b>	M=Meter / meters
DS-53001 (1 m)	01 M
DS-53001 (2 m)	02 M
DS-53001 (3 m)	03 M
DS-53001 (5 m)	05 M
DS-53001 (10 m)	10 M
DS-53001 (15 m)	15 M
DS-53001 (20 m)	20 M
DS-53001 (30 m)	30 M
DS-53001 (50 m)	50 M
DS-53001 (70 m)	70 M
<b>VGA</b>	
DS-53001 (1 m)	01 M
DS-53001 (2 m)	02 M
DS-53001 (3 m)	03 M
DS-53001 (5 m)	05 M
DS-53001 (10 m)	10 M
DS-53001 (15 m)	15 M
DS-53001 (20 m)	20 M
DS-53001 (30 m)	30 M
DS-53001 (50 m)	50 M
DS-53001 (70 m)	70 M
<b>DVI</b>	
DS-54101 (1 m)	01 M
DS-54101 (2 m)	02 M

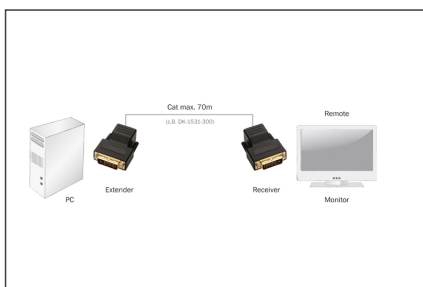

**Safety notes**

- If the device is powered by a plug-in power supply, ensure that the power adapter is connected correctly and meets the specified requirements (e.g. voltage and current).

- Only use certified CAT5e or CAT6 cables to ensure stable signal transmission.
- For particularly long cable runs or in environments prone to interference, it is recommended to use shielded network cables.
- Make sure that all connections are tight and secure to avoid loose contacts that could affect the signal quality. Make sure that the HDMI and Ethernet connections are connected correctly.
- Make sure that the CAT cable is not laid near high-voltage power lines or other strong sources of electromagnetic interference to avoid signal interference.
- Only operate the device within the specified temperature range.
- Do not use the device outdoors or in damp or wet environments
- Check all connections and cables regularly for wear or damage. Cables and connections can wear out, especially with frequent use or long installations, which can lead to poor signal quality or system failure.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)