


# DIGITUS Cabo de ligação para monitor VGA

AK-310103-018-E  
EAN 4016032286622

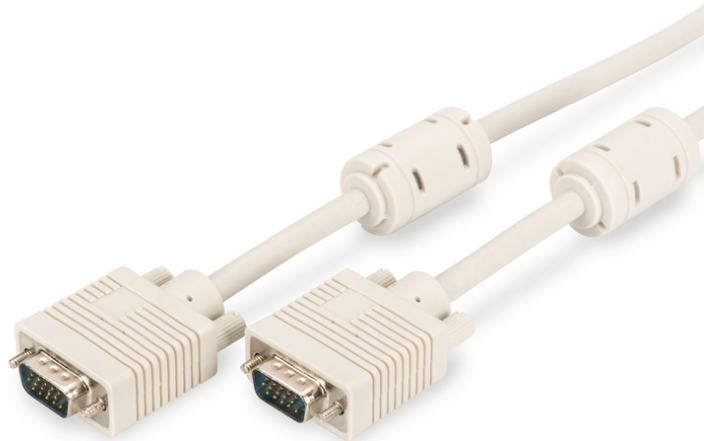

**VGA Monitor connection cable, HD15 M/M, 1.8m, 3Coax/7C, 2xferrite, be**

Para a ligação de um computador a, por exemplo, um monitor ou projetor.

**Proporciona uma protecção de alta qualidade em relação a interferências externas e impede o aparecimento de imagens fantasma e de outros defeitos na imagem.**

- Support 1024 x 768 pixel with 60Hz

**Attributes**

- Assortment: VGA Cables
- AWG: 28

- Cable type: 3Coax + 7-wire
- Color cable: beige
- Color connector: beige
- Connector 1: HD DSUB, 15-pin, plug
- Connector 2: HD DSUB, 15-pin, plug
- Connector surface: nickel-plated
- Display Data Channel: DDC2
- Ferrite filter: 2 x ferrite beads
- Hoods: molded
- Packaging: Polybag
- Wire material: CU
- Length: 1.8 m
- Shielding: Double shielding

| Logistics                    |              |             |            |            |             |                 |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm <sup>3</sup> |
| Packaging Unit Carton        | 60           | 14.90       | 45.00      | 32.00      | 25.00       | 36,000.00       |
| Packaging Unit Inside        | 10           | 2.48        | 25.00      | 15.00      | 10.00       | 3,750.00        |
| Packaging Unit Single        | 1            | 0.25        | 22.00      | 17.00      | 4.00        | 1,496.00        |
| Net single without Packaging | 1            | 0.21        | 20.50      | 15.00      | 3.50        | 0.00            |

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany

<https://www.assmann.com>  
info@assmann.com