


# DIGITUS VGA Monitor connection cable, HD15/M - HD15/M

AK-310103-050-E  
EAN 4016032286691

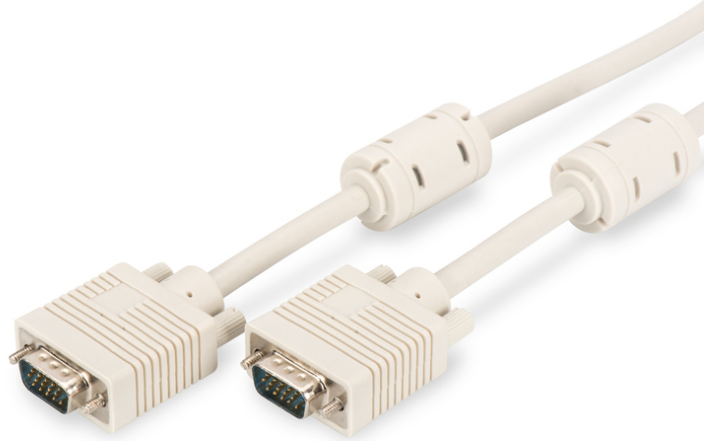

**VGA Monitor connection cable, HD15 M/M, 5.0m, 3Coax/7C, 2xferrite, be**

For connection of a PC, for example, with a monitor or beamer /projector.

**Offers high-quality protection against external interferences and prevents ghost images and other image faults.**

- Support 1280 x 1024 pixel with 60Hz
- Assortment: VGA Cables
- AWG: 28
- Cable type: 3Coax + 7-wire
- Color cable: beige

- Color connector: beige
- Connector 1: HD DSUB, 15-pin, plug
- Connector 2: HD DSUB, 15-pin, plug
- Connector surface: nickel-plated
- Display Data Channel: DDC2
- Ferrite filter: 2 x ferrite beads
- Hoods: molded
- Packaging: Polybag
- Wire material: CU
- Length: 5 m
- Shielding: Double shielding

| Logistics                    |              |             |            |            |             |                 |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm <sup>3</sup> |
| Packaging Unit Carton        | 20           | 10.50       | 38.00      | 32.00      | 28.00       | 34,048.00       |
| Packaging Unit Inside        | 5            | 2.63        | 21.00      | 26.00      | 10.00       | 5,460.00        |
| Packaging Unit Single        | 1            | 0.53        | 18.00      | 18.00      | 5.50        | 1,782.00        |
| Net single without Packaging | 1            | 0.50        | 16.50      | 16.50      | 4.50        | 0.00            |

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>

[info@assmann.com](mailto:info@assmann.com)