

# DIGITUS Cabo de ligação HDMI High Speed com Ethernet

AK-330107-020-S  
EAN 4016032290957



### HDMI High Speed connection cable, type A M/M, 2.0m, Ultra HD 60p, gold, bl

Este cabo HD compatível com 3D serve para a ligação de equipamentos áudio/vídeo, como, por exemplo, leitores Blu-ray, consolas de jogo, entre outros, a um televisor, monitor ou computador. Também se adequa a qualquer aplicação com base em IP.


#### Compatível com 4K/Ultra HD e 3D + ligação Ethernet

- Suporta até 4K / 60Hz
- Suporta 3D
- Suporta Canal de Retorno Áudio (ARC)
- Suporta Controlo Eletrónico do Consumidor (CEC)
- Suporta Lip-Sync (sincronização áudio/vídeo)
- Compatível com DolbyTrueHD
- Suporte de transmissão em sequência múltipla de áudio/vídeo
- Suporte de Cinemascope 21:9
- Suporte de 32 canais áudio

- Com canal Ethernet (HEC)
- Com canal Ethernet (HEC)
- Assortment: HDMI Cables
- AWG: 30
- Color cable: black
- Color connector: black
- Connector 1: HDMI type A, plug
- Connector 2: HDMI type A, plug
- Connector surface: gold-plated
- HDMI Standard: High Speed HDMI with Ethernet
- HDTV Resolution max.: 3840 x 2160 Pixel, 60Hz
- HDTV Standard: Ultra HD 4K
- Hoods: molded
- Packaging: Polybag
- Wire material: CU
- Length: 2 m
- AOC - Active Optical Cable: no
- Shielding: triple shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	80	9.40	40.00	38.00	21.00	31,920.00
Packaging Unit Inside	5	0.59	5.00	44.00	44.00	9,680.00
Packaging Unit Single	1	0.12	19.00	15.00	3.50	997.50
Net single without Packaging	1	0.09	17.00	13.00	3.00	0.00

**More images:**

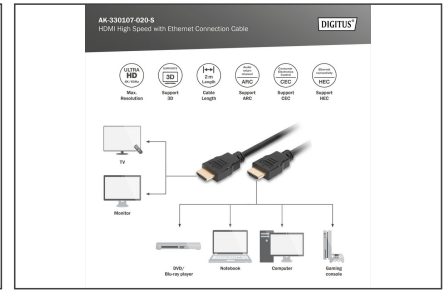

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)