


# **DIGITUS HDMI High Speed with Ethernet connection** cable

AK-330107-050-S EAN 4016032290971



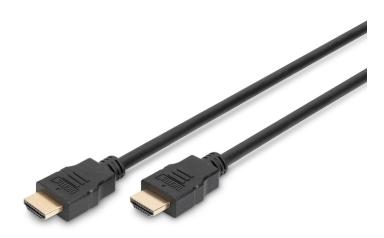

# HDMI High Speed Connection Cable, Type A, w/Ethern M/M, 5.0m, Ultra HD, 4K@30Hz, gold, bl

This 4K and 3D-compatible cable is used to connect audio/video devices, such as Blu-ray players, games consoles, etc., to a TV, monitor or PC. Also suitable for use with any IP-based application.

# 4K audio / video transmission (3840x2160) + Ethernet over HDMI

- Supports up to 4K Ultra HD with 30 Hz
- 3D support
- Supports Audio Return Channel (ARC)
- Supports Consumer Electronic Control (CEC)
- Supports lip-sync (audio/video synchronization)
- Dolby TrueHD capable
- With Ethernet channel (HEC)

#### **Attributes**


- Assortment: HDMI Cables
- AWG: 30
- · Color cable: black
- · Color connector: black
- Connector 1: HDMI type A, plug
- Connector 2: HDMI type A, plug
- Connector surface: gold-plated
- HDMI Standard: High Speed HDMI with Ethernet
- HDTV Resolution max.: 3840 x 2160 Pixel, 30Hz
- HDTV Standard: Ultra HD 4K
- · Hoods: molded
- · Packaging: Polybag
- Wire material: CU
- Length: 5 m
- AOC Active Optical Cable: no
- Shielding: triple shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	20	4.50	35.00	26.00	24.00	21,840.00
Packaging Unit Inside	5	1.13	43.00	45.00	4.00	7,740.00
Packaging Unit Single	1	0.23	27.00	23.00	4.00	2,484.00
Net single without Packaging	1	0.18	16.00	13.50	4.00	0.00

#### More images:









## Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- · Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- · Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

## EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH Auf dem Schüffel 3 Lüdenscheid, Germany https://www.assmann.com info@assmann.com