


DIGITUS Высокоскоростной соединительный HDMI-кабель для подключения к удлинителю кабеля сети Ethernet

AK-330201-030-S
EAN 4016032291145

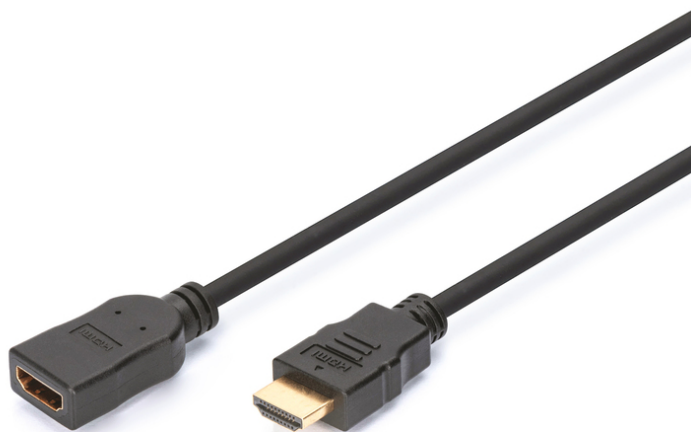

HDMI High Speed extension cable, type A M/F, 3.0m, w/Ethernet, Ultra HD 24p, gold, bl

Этот кабель подходит для формата Full HD (1080p) и 3D и используется для удлинения существующих соединительных аудио-/видеокабелей устройств, таких как Blu-ray плеер, игровые приставки или консоли, и т.д., например, к ТВ, монитору или к компьютеру. Может использоваться для любого вида применения, в котором используется IP-адрес.


Подходит для 4K/Ultra HD и 3D + соединение Ethernet

- Поддерживает 4K при 30 Гц
- Стандарт HDMI: 1,4
- Assortment: HDMI Cables
- AWG: 30
- Color cable: black

- Color connector: black
- Connector 1: HDMI type A, plug
- Connector 2: HDMI type A, jack
- Connector surface: gold-plated
- Ferrite filter: none
- HDMI Standard: High Speed HDMI with Ethernet
- HDTV Resolution max.: 3840 x 2160 Pixel, 30Hz
- HDTV Standard: Ultra HD 4K
- Hoods: molded
- Packaging: Polybag
- Wire material: CU
- Length: 3 m
- AOC - Active Optical Cable: no
- Shielding: triple shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	30	10.80	35.00	26.00	24.00	21,840.00
Packaging Unit Inside	10	3.60	6.00	42.00	41.00	10,332.00
Packaging Unit Single	1	0.36	2.50	14.00	24.00	840.00
Net single without Packaging	1	0.36	0.00	0.00	0.00	0.00

More images:

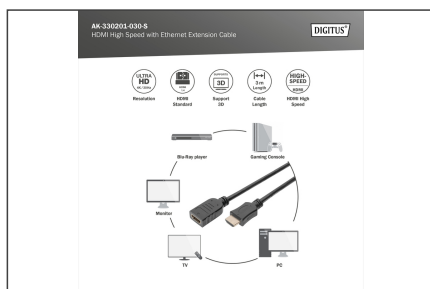

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable.
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com