


# DIGITUS Mini DisplayPort Adapter / Converter, Mini DP to DVI-I

DB-340406-001-W  
EAN 4016032292449

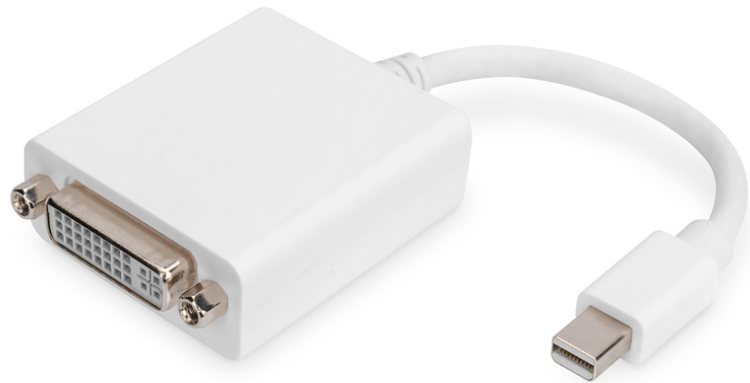

**DisplayPort Adapter Cable, Type mini DP-DVI (24+5) M/F, 0.15m, Full HD, DP 1.2 , wh**

The Mini DisplayPort Adapter from DIGITUS® converts high-resolution video signals from Mini DP format to DVI format. All compatible devices with a Mini DP port can be connected; output is provided via the DVI interface of the adapter. Devices with a Thunderbolt 1 or 2 interface can be connected, among others. The maximum supported resolution is Full HD (1080p) with a display refresh rate of 60 Hz. The compact design is ideal for mobile use.

**The adapter converts Mini DisplayPort signals to DVI signals**

- Maximum resolution: 1920 x 1080p / 60 Hz
- Supported transmission modes: RBR, HBR, HBR2
- Maximal bandwidth: 10,8 Gbps
- HBR-Version/transfer mode: HBR1 (2,70 Gbit/s per lane)
- HDCP-Version: HDCP 1.3


- AWG: 32
- Color cable: white
- Connector 1: Mini DP, plug
- Connector 2: DVI-I, (24+5), jack
- Connector surface: nickel-plated
- DisplayPort standard: DisplayPort 1.1a
- Ferrite filter: none
- HDTV Standard: Full HD
- Hoods: molded
- Interlock: none
- Length: 0.15 m
- AOC - Active Optical Cable: no
- Shielding: Double shielding


**Package contents**

- 1 x Mini DisplayPort Adapter / Converter, Mini DP to DVI-I

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	80	3.36	34.00	50.00	33.00	56,100.00
Packaging Unit Inside	20	0.84	28.00	24.00	16.00	10,752.00
Packaging Unit Single	1	0.04	7.50	23.50	2.30	405.38
Net single without Packaging	1	0.04	1.80	4.60	25.00	0.00

**More images:**

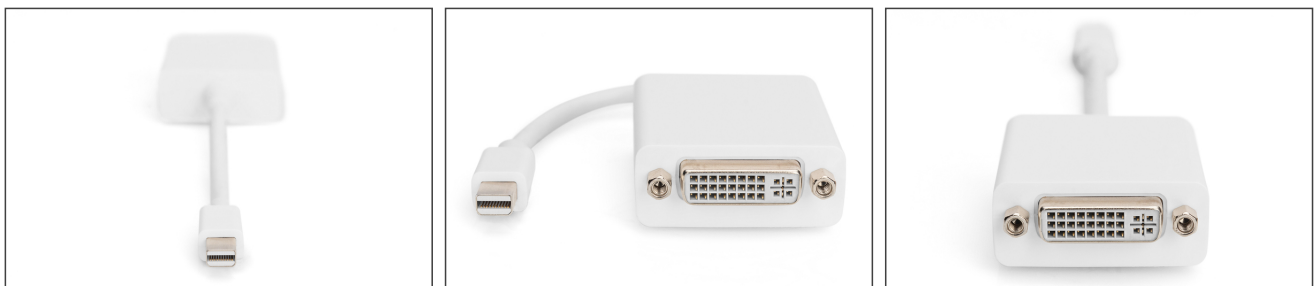

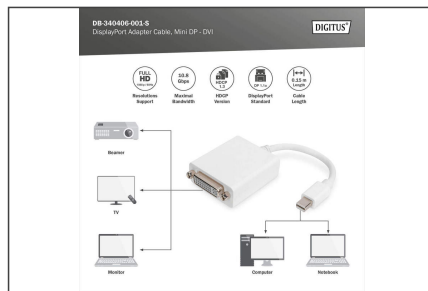

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)