

# DIGITUS Gigabit Media Converter, RJ45 / SC

DN-82121-1  
EAN 4016032293132



### Gigabit Ethernet Media Converter, Singlemode SC connector, 1310nm, up to 10km

Os Conversores multimídia da DIGITUS® são a solução ideal para a migração de sinais de rede de fibra e de cabo de cobre. A partir de agora, é possível aceder à tecnologia de fibra e transferir os sinais de rede ao longo de vários quilômetros sem ter de substituir toda a infra-estrutura de rede. A nossa grande variedade de produtos corresponde às suas necessidades individuais. O funcionamento intuitivo garante uma instalação fácil e rápida.

#### A solução de conversão ideal para transmissão de dados óticos

- Converte sinais de rede baseados em cabo em sinais de fibra ótica
- Alta qualidade e excelente proteção contra falhas
- 10/100/1000Base-TX para 1000Base-LX
- Ligações: 1x RJ45, 1x SC Duplex
- Alcance até 10km
- Comprimento de onda: 1310 nm
- Fibra dupla de modo simples
- Reconhecimento automático de cabo – função auto MDI/ MDI-X
- Autorreconhecimento de full e half duplex
- LED de diagnóstico sobre o estado e monitorização de atividade
- Adequado para cabo de fibra ótica 9/125 µm

- Normas suportadas: IEEE 802.3 Ethernet, IEEE 802.3u Fast Ethernet, IEEE 802.3z Gigabit Ethernet
- Temperatura de Funcionamento: 0 a 60°C
- Dimensões (C x L x A): 95mm x 70mm x 26mm
- Peso: 200 g
- Conversor autónomo com alimentação externa
- Tensão de entrada: 5V DC

#### Attributes


- Connector 1: RJ45
- Connector 2: SC
- Mode: Singlemode
- Distance (km): 20
- Industrial usage: no
- Broadcasting Mode: Unidirectional
- PoE injector: no
- Ethernet speed: Gigabit

#### Package contents

- Conversor de media
- Guia de início rápido
- Fonte de alimentação

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	20	9.00	30.00	27.00	55.00	44,550.00
Packaging Unit Inside	1	0.45	6.00	21.60	16.10	2,086.56
Packaging Unit Single	1	0.45	6.00	21.60	16.10	2,086.56
Net single without Packaging	1	0.18	12.00	7.00	2.60	0.00

More images:

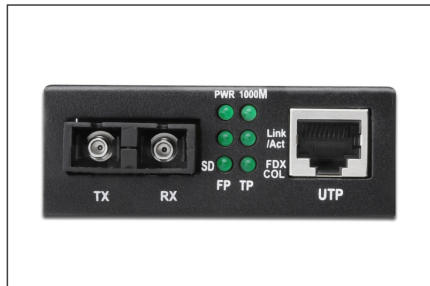

Part Number	Part Name	Speed	Connector	Distance	Media	Message	Operating Temperature	Additional Features
284-00001	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00002	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00003	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00004	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00005	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00006	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00007	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00008	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00009	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00010	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00011	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00012	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00013	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00014	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00015	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00016	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00017	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00018	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00019	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00020	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00021	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00022	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00023	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00024	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00025	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00026	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00027	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00028	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00029	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00030	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00031	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00032	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00033	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00034	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00035	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00036	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00037	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00038	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00039	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00040	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00041	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00042	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00043	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00044	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00045	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00046	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00047	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00048	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00049	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	
284-00050	ASSMANN 1000M	1000Mbps	2x SFP	10km	Plastic	1000Mbps	0 to 40°C	



Safety notes

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)