

# DIGITUS Conversor de media Gigabit DIGITUS, RJ45 / SFP

DN-82130  
EAN 4016032293163



### Gigabit Ethernet Media Converter, SFP SFP Open Slot, without SFP Module

Os Conversores multimídia da DIGITUS® são a solução ideal para a migração de sinais de rede de fibra e de cabo de cobre. A partir de agora, é possível aceder à tecnologia de fibra e transferir os sinais de rede ao longo de vários quilómetros sem ter de substituir toda a infra-estrutura de rede. A nossa grande variedade de produtos corresponde às suas necessidades individuais. O funcionamento intuitivo garante uma instalação fácil e rápida. Os anos de experiência e a grande variedade de produtos permitem que a DIGITUS® se torne num parceiro fiável para a sua engenharia de rede.

#### A solução de conversão ideal para transmissão de dados óticos

- Converte sinais de rede baseados em cabo em sinais de fibra ótica
- Alta qualidade e excelente proteção contra falhas
- Ligações: 1x RJ45, 1x SFP
- Alcance até 80km
- Reconhecimento automático de cabo – função auto MDI/ MDI-X
- Autorreconhecimento de full e half duplex
- LED de diagnóstico sobre o estado e monitorização de atividade

- Normas suportadas: IEEE 802.3 Ethernet, IEEE 802.3u Fast Ethernet, IEEE 802.3z Gigabit Ethernet
- Temperatura de Funcionamento: 0 a 60°C
- Dimensões (C x L x A): 95mm x 70mm x 26mm
- Peso: 200 g
- Conversor autónomo com alimentação externa
- Tensão de entrada: 5V DC
- Módulo SFP exclusivo
- Connector 1: RJ45
- Connector 2: SFP
- Mode: Copper
- Distance (km): Depending on module
- Industrial usage: no
- Broadcasting Mode: Depending on module
- PoE injector: no
- Ethernet speed: Gigabit



#### Package contents

- Conversor de media
- Guia de início rápido
- Fonte de alimentação

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	20	9.00	30.00	27.00	55.00	44,550.00
Packaging Unit Inside	1	0.45	5.50	13.00	24.00	1,716.00
Packaging Unit Single	1	0.45	5.50	13.00	24.00	1,716.00
Net single without Packaging	1	0.00	2.60	7.00	9.50	0.00

More images:

Product Name	SKU Code	Serial	Component	Distance	Medium	Message	Quantity/Package	Active/Passive
Media Converter	40000000	00000000	SC Single-mode Transceiver	1000m	Plastic	100Mbps	1000	Active
Media Converter	40000000	00000000	SC Single-mode Transceiver	1000m	Plastic	100Mbps	1000	Active
Media Converter	40000000	00000000	SC Single-mode Transceiver	1000m	Plastic	100Mbps	1000	Active
Media Converter	40000000	00000000	SC Single-mode Transceiver	1000m	Plastic	100Mbps	1000	Active
Media Converter	40000000	00000000	SC Single-mode Transceiver	1000m	Plastic	100Mbps	1000	Active

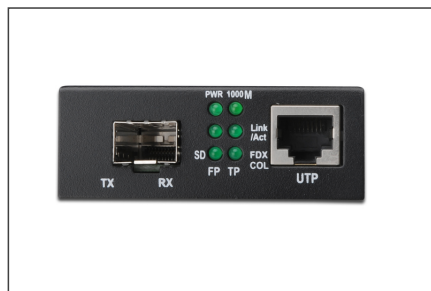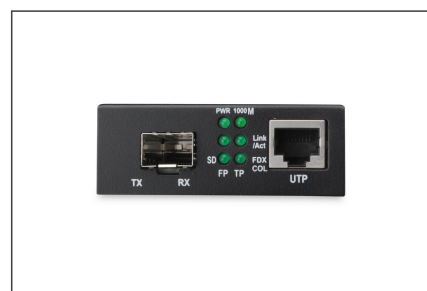

Safety notes

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.  
 ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)