

DIGITUS HDMI High Speed Connection Cable, with Amplifier

AK-330105-150-S
EAN 4016032295808



HDMI High Speed Connection Cable, Type A, w/amp. M/M, 15.0m, Full HD, gold, bl

This Full HD (1080p) and 3D suitable cable with active amplifier used for connection of audio/video devices such as Blu-ray player, game pads or consoles, etc., for example, with a TV, monitor or computer.

Full HD and 3D capable over long distances by signal boost


- HDMI 1.3 feature support
- Support up to 1080p with 60Hz
- Supported Video formats: 1080p @24 Hz, 1080p @30 or @60Hz; 3D
- Supported Audio format: DVD-Audio, SACD, Dolby Digital Plus, TrueHD and dts-HD
- Support 3D

Attributes

- Assortment: HDMI Cables
- AWG: 28
- Color cable: black
- Color connector: black
- Connector 1: HDMI type A, plug
- Connector 2: HDMI type A, plug
- Connector surface: gold-plated
- HDMI Standard: High Speed HDMI
- HDTV Standard: Full HD
- Hoods: molded
- Wire material: CU
- Length: 15 m
- AOC - Active Optical Cable: no
- Shielding: Double shielding

| Logistics | | | | | | |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm ³ |
| Packaging Unit Carton | 11 | 11.50 | 50.50 | 32.00 | 21.50 | 34,744.00 |
| Packaging Unit Inside | 1 | 1.05 | 19.00 | 18.00 | 8.00 | 2,736.00 |
| Packaging Unit Single | 1 | 1.05 | 19.00 | 18.00 | 8.00 | 2,736.00 |
| Net single without Packaging | 1 | 0.96 | 17.00 | 16.50 | 7.50 | 0.00 |

More images:

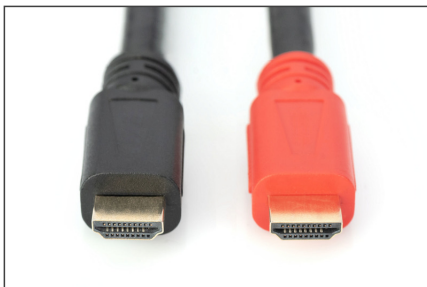

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com