

# DIGITUS Cabo de ligação HDMI High Speed, com amplificador

AK-330105-300-S  
EAN 4016032295839



### HDMI High Speed connection cable, type A, w/ amp. M/M, 30.0m, Full HD, CE, gold, bl

Este cabo compatível com Full HD (1080p) e 3D com amplificador ativo serve para ligar equipamentos áudio/vídeo, como, por exemplo, leitores Blu-Ray, consolas de jogo etc. a uma televisão, monitor ou PC.

#### Compatível com Full HD e 3D


- Suporta funcionalidade HDMI 1.3
- Suporta até 1080p com 60 Hz
- Suporta formatos de vídeo: 1080p@24 Hz, 1080p@30, 1080p @60 Hz ou 3D
- Formatos áudio suportados: Áudio DVD, SACD, Dolby Digital Plus, TrueHD e dts-HD
- Suporta 3D

- Assortment: HDMI Cables
- AWG: 26
- Color cable: black
- Color connector: black
- Connector 1: HDMI type A, plug
- Connector 2: HDMI type A, plug
- Connector surface: gold-plated
- HDMI Standard: High Speed HDMI
- HDTV Standard: Full HD
- Hoods: molded
- Wire material: CU
- Length: 30 m
- AOC - Active Optical Cable: no
- Shielding: Double shielding

### Logistics

|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm <sup>3</sup> |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
| Packaging Unit Carton        | 4            | 10.00       | 42.00      | 23.00      | 21.00       | 20,286.00       |
| Packaging Unit Inside        | 1            | 2.50        | 20.00      | 19.00      | 11.50       | 4,370.00        |
| Packaging Unit Single        | 1            | 2.50        | 20.00      | 19.00      | 11.50       | 4,370.00        |
| Net single without Packaging | 1            | 2.07        | 18.50      | 18.00      | 12.00       | 0.00            |

### More images:

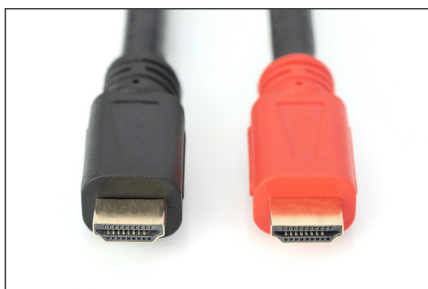

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)