

# DIGITUS Соединительный кабель DVI

AK-320108-010-S  
EAN 4016032298274



**DVI connection cable, DVI(24+1) M/M, 1.0m, DVI-D Dual Link, bl**

Этот цифровой кабель DVI с поддержкой Full HD (двухканальный) используется для подключения аудио-/видеоустройств с интерфейсом DVI (24+1), например, ПК, ноутбука, монитора, телевизора или видеопроектора.

**Full HD, двухканальный**


- Поддержка до 2560 x 1600 пикселей при 30 Гц


**Attributes**

- Assortment: DVI Cables
- Color cable: black
- Color connector: black
- Connector 1: DVI-D, (24+1), plug
- Connector 2: DVI-D, (24+1), plug
- Connector surface: nickel-plated
- HDTV Resolution max.: 2560 x 1600 Pixel, 60Hz
- HDTV Standard: Full HD
- Hoods: molded
- Length: 1 m

| Logistics                    |              |             |            |            |             |           |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------|
|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³       |
| Packaging Unit Carton        | 100          | 11.00       | 38.00      | 30.00      | 22.00       | 25,080.00 |
| Packaging Unit Inside        | 10           | 1.10        | 35.00      | 29.00      | 12.00       | 12,180.00 |
| Packaging Unit Single        | 1            | 0.11        | 17.00      | 16.00      | 3.50        | 952.00    |
| Net single without Packaging | 1            | 0.13        | 14.00      | 13.50      | 3.00        | 0.00      |

**More images:**

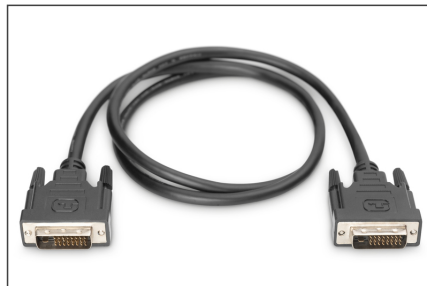

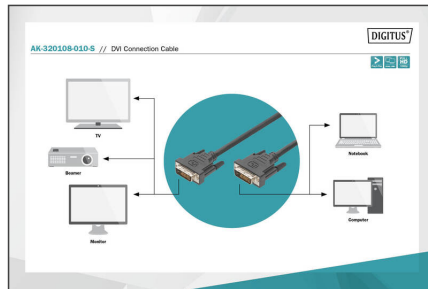

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product specifications for the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)