

# DIGITUS Переходник DVI

AK-320504-000-S  
EAN 4016032300519



**DVI adapter, DVI(24+5) - HD15 M/F, DVI-I dual link, bl**

Этот переходник подходит для подключения кабеля HD15 к устройствам или кабелю с разъёмом DVI (24+5).


**Яркое и четкое изображение благодаря разрешению Full HD**

- Поддерживает 1080p при 60 Гц
- HD-Ready, двухканальный
- Assortment: DVI Cables
- Cable type: Dual-Link

- Color connector: black
- Connector 1: DVI-I, (24+5), plug
- Connector 2: HD DSUB, 15-pin, jack
- Connector surface: nickel-plated
- HDTV Resolution max.: 1920 x 1200 Pixel, 60Hz
- HDTV Standard: Full HD
- Hoods: molded
- Shielding: single shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	200	9.06	37.00	24.00	18.00	15,984.00
Packaging Unit Inside	10	0.45	14.00	10.00	5.00	700.00
Packaging Unit Single	1	0.05	8.00	6.00	2.00	96.00
Net single without Packaging	1	0.04	6.30	4.00	1.30	0.00

**More images:**

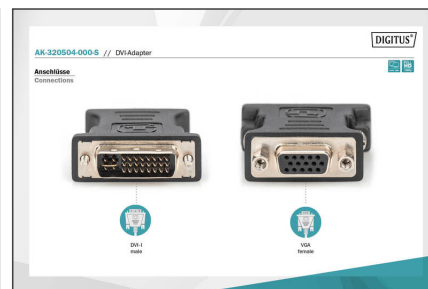

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)