


# DIGITUS DVI adapter

AK-320505-000-S  
EAN 4016032300526

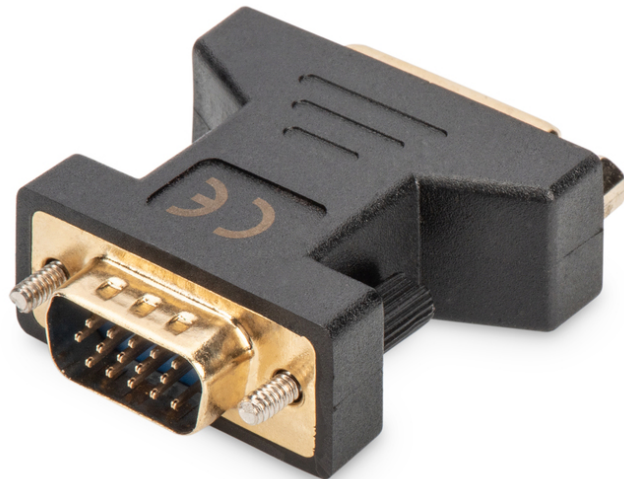

**DVI adapter, DVI(24+5) - HD15 F/M, DVI-I dual link, bl**

Этот адаптер подходит для подключения кабеля DVI к устройству или, кабелей с HD15 коннектором.


**HD-Ready**



- Поддерживает 1080p при 60 Гц
- Assortment: DVI Cables
- Cable type: Dual-Link
- Color connector: black

- Connector 1: DVI-I, (24+5), jack
- Connector 2: HD DSUB, 15-pin, plug
- Connector surface: nickel-plated
- HDTV Resolution max.: 1920 x 1200 Pixel, 60Hz
- HDTV Standard: Full HD
- Hoods: molded
- Packaging: Polybag
- Shielding: single shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	200	7.90	37.00	18.00	24.00	15,984.00
Packaging Unit Inside	10	0.40	16.00	13.00	5.00	1,040.00
Packaging Unit Single	1	0.04	8.00	5.00	1.50	60.00
Net single without Packaging	1	0.03	6.50	4.00	1.50	0.00

**More images:**

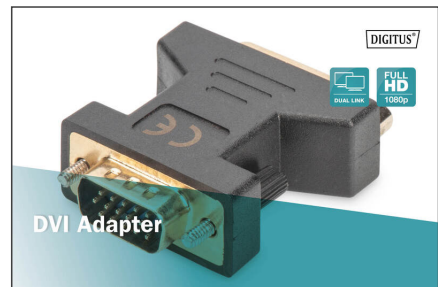

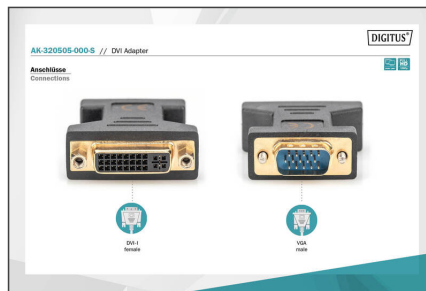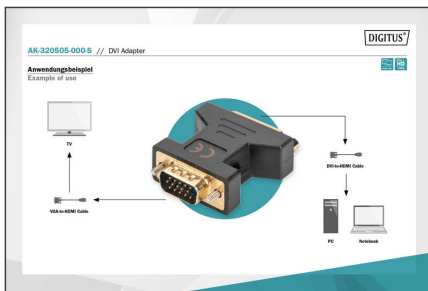

### Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

### EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)