


# DIGITUS Cat.7 S/FTP installation cable, 1000 m, simplex, Dca

DK-1743-VH-10  
EAN 4016032300786

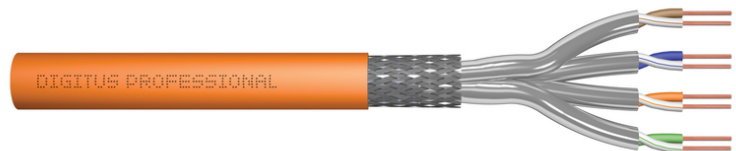

### CAT 7 S-FTP installation cable, 1200 MHz Dca (EN 50575), AWG 23/1, 1000 m drum, sx, orange

The Digitus Cat 7 installation cable is designed for use in the structured data center and the building cabling according to ISO/IEC 11801, DIN EN 50288-4-1, DIN EN 50173, IEC 61156-7, EN 50288-9-1. The cable is perfectly suitable for the transmission of both analog and digital data and also supports POE and POE+. The shielding structure is composed of single shielded pairs with a tinned copper braid, which ensures excellent shielding and electrical values.

#### Future-oriented standards and high-end quality for your network.

- Physical properties:
- Conductor: Bare copper wire, AWG 23/1
- System(s) of assessment and verification of constancy of performance: System 3
- Insulation: SFS-PE (foamed polyethylene jacket)
- Total number of insulated conductors: 8, twisted into 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Shielding of the individual pairs: aluminum-laminated polyester film, covers 100%
- Overall shielding: copper braiding
- Outer sheath: Eca to B2ca in accordance with EN 50575; LSZH
- Outer sheath thickness (nominal): 0.50 mm (Eca); 0.52 mm (Dca); 0.60 mm (Cca); 0.60 (B2ca)
- Color: Orange (RAL 2008)
- Mechanical properties:
- Strain relief: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.

- Transport and storage temperature range: -20 °C to +60 °C
- Operating temperature range: -20 °C to +50 °C
- Installation temperature range: 0 °C to +50 °C
- Outer diameter simplex (nominal): 7.0 mm (Eca); 7.2 mm (Dca); 7.5 mm (Cca); 7.5 mm (B2ca)
- Weight (kg/km): 49.5 kg (Eca); 51 kg (Dca), 53 kg (Cca); 53 kg (B2ca)
- Electrical properties:
- Impedance: 100±15 Ohm @ 4 - 1000 MHz; 100±25 OHM @ 100-600 MHz
- Capacitance: 45 pF/m nominal @ 1 KHz
- Capacitance unbalance (pair-earth): 1.6 pF/m max. @ 1 KHz
- Insulation resistance: 5 GOhm x km min.
- DC resistance: 95 Ohm/km max. (2% max. unbalanced resistance)
- Loop resistance: 190 Ohm/km max. (2% max. unbalanced resistance)
- Operating voltage: 72 Vdc max.
- Outer sheath: Dca-s2 d1 a1 acc. to EN 50575; LSZH
- Coupling attenuation: CA-Type 1b
- Phase delay: 450 nS/100 m max.
- Time delay: 10 nS/100 m max.
- Separation class: "d" according to EN 50174-2
- NVP: 79%
- Assortment: Twisted Pair Installation Cables
- Category: CAT 7
- Shielding: S-FTP, pairs in metal foil and braid shielding
- CPR: Dca
- Length: 1000 m
- Color: orange
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	47.00	55.00	55.00	35.00	105,875.00
Packaging Unit Inside	1	47.00	55.00	55.00	35.00	105,875.00
Packaging Unit Single	1	47.00	55.00	55.00	35.00	105,875.00
Net single without Packaging	1	54.00	55.00	55.00	35.00	0.00




More images:



CEP-Symbol	Beschreibung	Leistungsfähigkeit (MHz)	Abgleich der verdrhten Paare	Zusätzliche Eigenschaften
B2ca	Sehr hoch	1+	1+ (Ermittlung der besten Werte)	• 25°C Temperaturstabilität
Cca	Hoch		• Hohe Flexibilität	• Hohe Flexibilität
Dca	Mittel	3	• Typischerweise	• Typischerweise
Eca	Niedrig		• Typischerweise	• Typischerweise

**Certificate**  
No. 18554-11  
Class B1

**Zertifikat**  
No. 18554-11  
Klasse B1

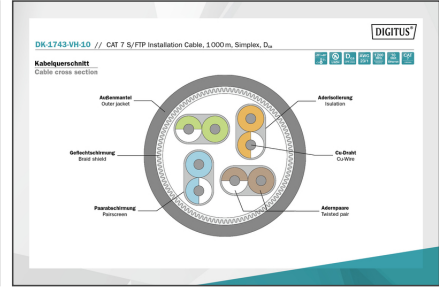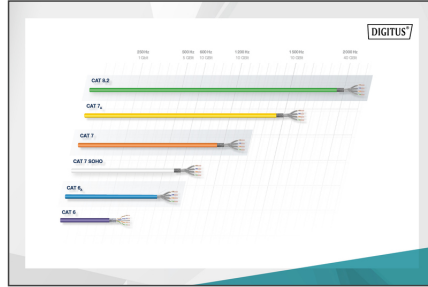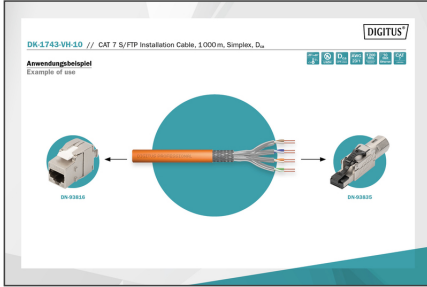

Produktkennlinie	Produkt-Informationen	Physikalische Spezifikationen
Produktname	DK-1743-VH-10 // CAT 7 S/FTP Installation Cable, 1000m, Simplex, D <sub>ca</sub>	Standard
Produktbeschreibung	...	...
...	...	...

Parameter	AWG	MT	MT	PE-MST	AWG	MT	MT	MT	MT	MT	MT	MT
1	2	3	3	3	3	3	3	3	3	3	3	3
...	...	...	...	...	...	...	...	...	...	...	...	...

- AWG 23/1
- 1200 MHz
- 10 Gbit Ethernet
- CAT 7
- 20° + 50°
- LSZH
- D<sub>ca</sub>
- CPR Class 0

CAT 7 S/FTP Installation Cable, 1000m, Simplex, D<sub>ca</sub>



Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- Installation only in dry rooms.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.  
 ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheld, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)