

DIGITUS mini GBIC (SFP) modules, 1,25 Gbps, 20km

DN-81004
EAN 4016032305729



1,25 Gbps SFP-module, enkelvoudige modus, BiDi LC Simplex, Tx1550nm/Rx1310nm, tot 20km

De DIGITUS® Mini GBIC (SFP) zendontvanger module biedt de hoogste kwaliteit en betrouwbaarheid. Of het nu gaat van switch naar switch, van converter naar switch, van converter naar converter of van andere, uitgebreide toepassingen: De grote verscheidenheid aan DIGITUS®-modules stelt u in staat om flexibel gebruik te maken van de glasvezeltechnologie. Dankzij de conformiteit met de MSA-norm (Multi Source Agreement) is een compatibiliteit met externe fabrikanten gegarandeerd.

De plug-and-play glasvezelaansluiting

- Mini GBIC SFP (Small Form Factor Pluggable) module
- Compatibel met de volgende fabrikanten: Allied Telesis, Allnet, CISCO, , D-Link, Edimax, Hirschmann, Intellinet, KTI Networks, Level One, Netgear, PLANET, Tenda, TP-Link, TRENDnet, ZyXEL, ZTE
- Bidirectionele WDM-module - Alleen één vezel nodig
- Hoge kwaliteit en de beste bescherming tegen uitvallen
- 1,25 Gbps maximale gegevenssnelheid
- Voldoet aan de IEEE 802.3z Gigabit standaard
- Klasse 1 laserproduct volgens EN 60825-1
- Eenvoudige Plug and Play-installatie



- Compatibel met MSA (Multi Source Agreement)
- Hot pluggable
- Aansluiting: 1x LC Simplex
- Golflengte: Tx 1550 nm/Rx 1310nm
- Zendervermogen: Minimum -5 dBm, Maximum 0 dBm
- Gevoeligheid ontvangstvermogen: Minimum -24 dBm
- Voor een afstand van maximaal 20 km
- Geschikt voor 09/125µm Singlemode-glasvezelkabel
- Veilig snelvergrendelingsmechanisme
- 3,3 V voeding
- Bedrijfstemperatuur: 0°C~70°C
- Modus: Enkele modus
- Connector: LC
- Distance Unit: 20
- Golflengte: 1550/1310 nm
- DDM ondersteuning: no
- Broadcasting Mode: Bidirectioneel
- Compatibiliteit met fabrikant: Universeel (MSA), Cisco
- Ethernetsnelheid: Gigabit

Package contents

- SFP-module

| Logistics | | | | | | |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm ³ |
| Packaging Unit Carton | 240 | 8.50 | 50.00 | 29.00 | 54.50 | 79,025.00 |
| Packaging Unit Inside | 30 | 1.06 | 7.00 | 20.00 | 30.00 | 4,200.00 |
| Packaging Unit Single | 1 | 0.04 | 9.00 | 11.50 | 3.00 | 310.50 |
| Net single without Packaging | 1 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

More images:

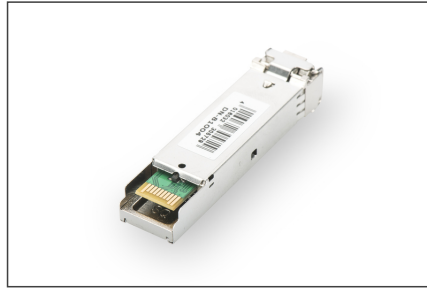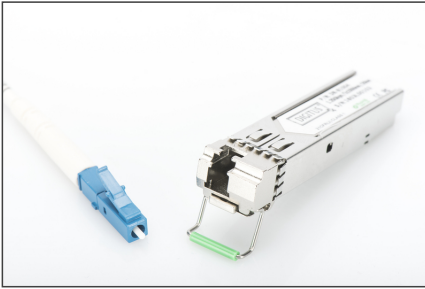

| Part Number | Rate | Speed | Distance | Connector | Mounting | Operating Temperature | Industrial Model |
|------------------------|--------|-------|----------|-----------|----------|-----------------------|------------------|
| SFP Modules | | | | | | | |
| Plastic Housing | | | | | | | |
| Di-4040 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4041 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4042 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Plastic Housing | | | | | | | |
| Di-4043 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4044 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4045 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4046 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4047 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4048 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4049 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4050 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Plastic Housing | | | | | | | |
| Di-4051 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4052 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4053 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4054 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4055 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4056 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4057 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4058 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4059 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4060 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4061 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4062 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4063 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4064 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4065 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4066 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4067 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4068 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4069 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4070 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4071 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4072 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4073 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4074 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4075 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4076 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4077 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4078 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4079 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4080 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4081 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4082 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4083 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4084 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4085 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4086 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4087 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4088 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4089 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4090 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4091 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4092 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4093 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4094 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4095 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4096 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4097 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4098 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4099 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |
| Di-4100 | 40Gbps | SR | 10km | LC | Standard | 0 to 70 °C | |