

DIGITUS DIGITUS mini GBIC (SFP) модуль, 1.25 Гбитс, 20 KM

DN-81004
EAN 4016032305729



1.25 Gbps SFP Module, Singlemode, BiDi LC Simplex, Tx1550nm/Rx1310nm, up to 20km

Модули трансиверов DIGITUS® Mini GBIC (SFP) обеспечивают наивысшее качество и надежность. Будь то соединение между коммутаторами, между конвертером и коммутатором, между конвертерами или другие, обширные возможности применения: Большое разнообразие модулей DIGITUS® позволяет гибко использовать технологию стекловолокна. Благодаря соответствию стандарту MSA (Multi Source Agreement) обеспечивается совместимость с о сторонними производителями.

Стекловолоконное соединение Plug and Play

- Модуль Mini GBIC SFP (компактный приёмопередатчик)
- Совместим с устройствами следующих производителей: Allied Telesis, Allnet, CISCO, , D-Link, Edimax, Hirschmann, Intellinet, KTI Networks, Level One, Netgear, PLANET, Tenda, TP-Link, TRENDnet, ZyXEL, ZTE
- Двухнаправленный модуль WDM — требуется только одно волокно
- Высокое качество и максимальная отказоустойчивость
- Максимальная скорость передачи данных 1,25 Гбит/с
- Соответствует гигабитному стандарту IEEE 802.3z
- Класс 1 лазерный продукт по EN 60825-1
- Простая установка Plug and Play
- Совместим со стандартом MSA (сетевое соглашение)

- С возможностью оперативной замены
- Тип подключения: 1 симплекс LC
- Длина волны: Tx 1550 нм / Rx 1310 нм
- Мощность передатчика: Минимум — 5 дБм, максимум — 0 дБм
- Чувствительность приемника: Минимум — 24 дБм
- Для дистанции до 20 км
- Подходит для одномодового стекловолоконного кабеля 09/125µm
- Надежный быстродействующий механизм
- Электропитание 3,3 В
- Рабочая температура: 0-70 °C

Attributes



- Mode: Singlemode
- Connector: LC
- Distance (km): 20
- Wavelength: 1550/1310 nm
- DDM Support: no
- Broadcasting Mode: Biidirectional
- Manufacturer compatibility: Universal (MSA), Cisco
- Ethernet speed: Gigabit

Package contents

- Модуль SFP

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	240	8.50	50.00	29.00	54.50	79,025.00
Packaging Unit Inside	30	1.06	7.00	20.00	30.00	4,200.00
Packaging Unit Single	1	0.04	9.00	11.50	3.00	310.50
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

More images:

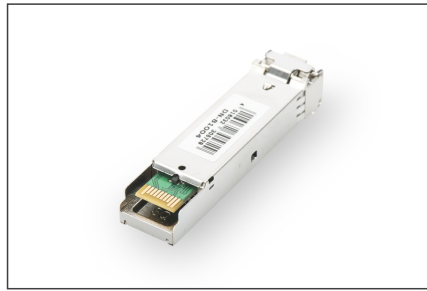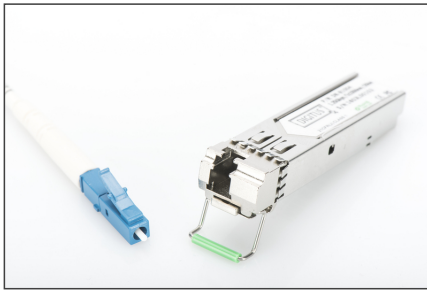

Part Number	Part Name	Speed	Distance	Connector	Mounting	Operating Temperature	Industrial Model
Di-4010	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4011	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4012	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4013	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4014	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4015	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4016	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4017	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4018	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4019	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4020	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4021	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4022	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4023	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4024	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4025	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4026	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4027	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4028	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4029	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4030	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4031	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4032	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4033	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4034	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4035	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4036	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4037	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4038	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4039	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4040	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4041	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4042	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4043	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4044	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4045	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4046	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4047	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4048	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4049	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4050	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4051	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4052	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4053	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4054	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4055	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4056	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4057	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4058	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4059	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4060	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4061	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4062	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4063	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4064	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4065	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4066	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4067	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4068	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4069	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4070	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4071	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4072	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4073	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4074	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4075	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4076	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4077	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4078	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4079	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4080	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4081	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4082	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4083	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4084	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4085	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4086	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4087	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4088	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4089	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4090	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4091	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4092	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4093	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4094	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4095	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4096	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4097	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4098	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4099	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓
Di-4100	10G SFP	10 Gbps	10 km	LC-Multimode Duplex	100mm	0 to 70 °C	✓

Safety notes

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage
- eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com