

# DIGITUS mini GBIC (SFP) Module, 1.25 Gbps, 20km

DN-81004  
EAN 4016032305729



**1.25 Gbps SFP Module, Singlemode, BiDi LC Simplex, Tx1550nm/Rx1310nm, up to 20km**

The DIGITUS® mini GBIC (SFP) transceiver modules offer highest quality and reliability. Whether from switch to switch, converter to switch, converter to converter or any else application: The wide product range of DIGITUS® modules makes possible a flexible usage of the fiber technology. The conformity to the MSA (Multi Source Agreement) standard ensures a compatibility to third party manufacturers.

**The plug and play fiber connection**

- Mini GBIC SFP (Small Form Factor Pluggable) module
- Compatible with the following manufacturers: Ubiquiti, Allied Telesis, Allnet, CISCO, D-Link, Edimax, Intellinet, KTI Networks, Level One, PLANET, Tenda, TP-Link, TRENDnet, ZyXEL, ZTE, Avaya, Mikrotik, ENTERASYS, FINISAR, FORCE 10, RIVERSTONE, Fortinet
- Bidirectional WDM Module - Only one fiber is needed
- High quality and excellent reliability
- 1.25 Gbps Maximum Data Rate
- Compliant to IEEE 802.3z Gigabit Standard
- Class 1 laser product compliant with EN 60825-1
- Easy plug-and-play installation



- MSA (Multi Source Agreement) compliant
- Hot pluggable
- Connector: 1x LC Simplex
- Wavelength: Tx 1550nm / Rx 1310nm
- Transmission Power: Minimum -5 dBm, Maximum 0 dBm
- Sensitivity receiving power: minimum -24 dBm
- For a Distance of up to 20km
- Suitable for 09/125µm Singlemode Fiber Cables
- Safe fast-locking mechanism
- 3.3V power supply
- Operating temperature: 0 °C ~ 70 °C
- Mode: Singlemode
- Connector: LC
- Distance (km): 20
- Wavelength: 1550/1310 nm
- DDM Support: no
- Broadcasting Mode: Bidirectional
- Manufacturer compatibility: Universal (MSA), Cisco
- Ethernet speed: Gigabit

**Package contents**

- SFP module

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	240	8.50	50.00	29.00	54.50	79,025.00
Packaging Unit Inside	30	1.06	7.00	20.00	30.00	4,200.00
Packaging Unit Single	1	0.04	9.00	11.50	3.00	310.50
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

More images:

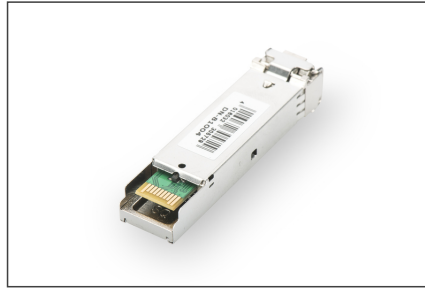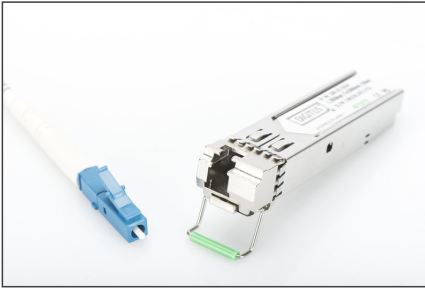

Part Number	Rate	Speed	Distance	Connector	Mounting	Operating Temperature	Industrial Model
<b>SFP Modules</b>							
<b>Plastic Housing</b>							
Di-4140	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4141	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4142	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
<b>Plastic Housing</b>							
Di-4143	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4144	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4145	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4146	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4147	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4148	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4149	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4150	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4151	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4152	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4153	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4154	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4155	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4156	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4157	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4158	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4159	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4160	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4161	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4162	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4163	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4164	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4165	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4166	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4167	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4168	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4169	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4170	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4171	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4172	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4173	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4174	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4175	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4176	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4177	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4178	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4179	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4180	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4181	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4182	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4183	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4184	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4185	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4186	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4187	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4188	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4189	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4190	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4191	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4192	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4193	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4194	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4195	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4196	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4197	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4198	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4199	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	
Di-4200	40 Gbps	10 Mbit/s	10 km	LC MPO-12	120mm	0 to 70 °C	