

# DIGITUS Wallplate for Keystone Modules, German type, middle plate 50x50 mm, frame 80x80 mm

DN-93821  
EAN 4016032305750



### Faceplate for Keystone Jacks, 3x RJ45 dust cover, 80/80 + central plate, pure white


The DIGITUS® Faceplates are suitable for the connection of all shielded DIGITUS® Keystone Modules. Included dust protection shutters provide a perfect protection. Their connection way of the module is 45° vertical (German and British Layout) or 90° horizontal (French Layout).

- Layout keystone entry: 45° outlet
- Area of application: Cavity socket, trunking, surface mount box
- Norms: ISO/IEC 11801 3rd Ed., EN 50173-1, EIA/TIA 568-C
- General properties:
- Suitable for installation in trunking, flush and surface mount
- Central ground connection

- Integrated dust cover
- Plastic label field
- Design compatible with spacer ring to current switch ranges of switch manufacturers
- Technical properties:
- Wall outlet material: Die-cast metal
- Central plate material: ABS UL 94V-0
- Frame material: ABS UL 94V-0
- Surface mount box material: ABS UL 94V-0
- Physical properties:
- Operation temperature: -20° C to +70 °C (ISO/IEC 11801, EN 50173-1, ANSI/TIA/EIA 568 C)
- Colour: White RAL9003

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	120	7.52	39.00	28.00	31.00	33,852.00
Packaging Unit Inside	1	0.06	26.50	9.00	9.00	2,146.50
Packaging Unit Single	1	0.06	3.00	10.50	15.50	488.25
Net single without Packaging	1	0.07	2.70	8.00	8.00	0.00

### More images:

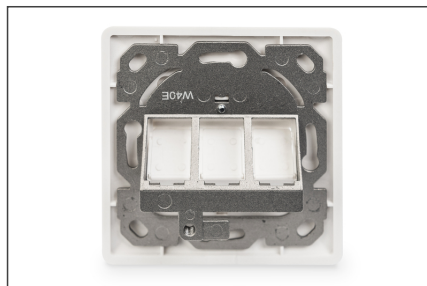

**Safety notes**

- Protect product from moisture
- Avoid antistatic charging when installing the product
- Observe the specifications of the raw cable manufacturer during installation

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)