


# DIGITUS DIN rail adapter for 2x Keystone modules

**AN-25185**  
**EAN 4016032306344**

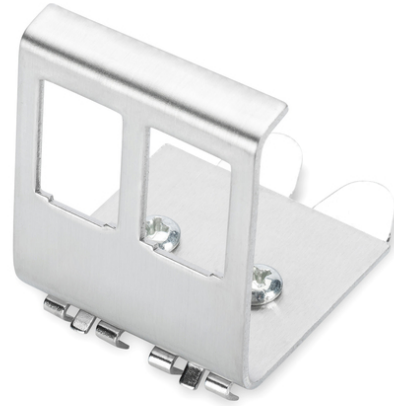

### DIN-Rail adapter for 2x Keystone Modules

The DIGITUS® DIN rail adapters are used to accommodate DIGITUS® Keystone modules. They are available as 1-port or 2-port versions.

- Keystone mount version: 45° outlet
- Areas of application: Electrical distribution boxes
- Standards: ISO/IEC 11801 3rd Ed., EN 50173-1, EIA/TIA 568-C
- General properties:

- Suitable for installation on the top-hat rail in electrical distribution boxes
- Technical features:
- Material empty housing: stainless steel
- Physical properties:
- Operating temperature: -20° C to +70 °C (ISO/IEC 11801, EN 50173-1, ANSI/TIA/EIA 568 C)

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	200	9.50	32.00	27.00	33.00	28,512.00
Packaging Unit Inside	10	0.48	25.00	6.00	6.00	900.00
Packaging Unit Single	1	0.05	18.00	8.00	4.00	576.00
Net single without Packaging	1	0.05	10.00	7.00	4.00	0.00

### Safety notes

- Observe the specifications of the raw cable manufacturer during installation

### EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)