


DIGITUS Industrial mini GBIC (SFP) Module, 1.25 Gbps, 20km

DN-81011
EAN 4016032307587

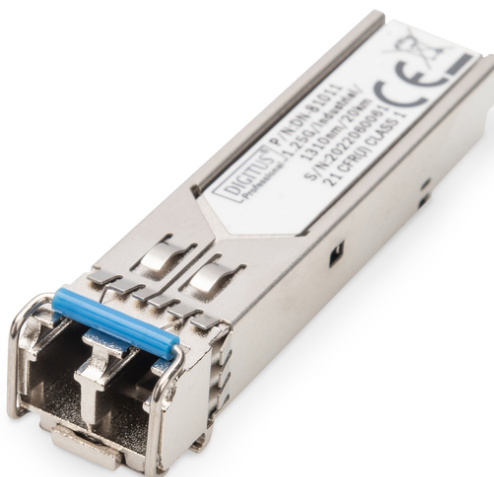

1.25 Gbps SFP Module, Singlemode, Industrial vers. LC Duplex Connector, 1310nm, up to 20km

The DIGITUS® mini GBIC (SFP) transceiver modules offer highest quality and reliability. Whether from switch to switch, converter to switch, converter to converter or any else application: The wide product range of DIGITUS® modules makes possible a flexible usage of the fiber technology. The conformity to the MSA (Multi Source Agreement) standard ensures a compatibility to third party manufacturers.

The plug and play fiber connection

- Mini GBIC SFP (Small Form Factor Pluggable) module
- Compatible with the following manufacturers: Allied Telesis, Allnet, Avaya, CISCO, D-Link, Edimax, FINISAR, FORCE 10, Gigamon, Intellinet, KTI Networks, Level One, PLANET, Tenda, TP-Link, TRENDnet, Mikrotik, ENTERASYS, RIVERSTONE, Unifi, Ubiquiti, ZyXEL, ZTE
- High quality and excellent reliability
- 1.25 Gbps Maximum Data Rate
- Compliant to IEEE 802.3z Gigabit Standard
- Class 1 laser product compliant with EN 60825-1
- Easy plug-and-play installation
- MSA (Multi Source Agreement) compliant




- Hot pluggable
- Connector: 1x LC Duplex
- 1000Base-LX - For Long Haul
- Wavelength: 1310nm
- Transmission power: minimum -8 dBm, maximum -3 dBm
- Sensitivity receiving power: minimum -24 dBm
- For a Distance of up to 20km
- Suitable for 09/125µm Singlemode Fiber Cables
- Safe fast-locking mechanism
- 3.3V power supply
- Operating temperature: -40 °C - +85 °C
- Mode: Singlemode
- Connector: LC
- Distance (km): 20
- Wavelength: 1310 nm
- DDM Support: no
- Broadcasting Mode: Unidirectional
- Manufacturer compatibility: Universal (MSA), Cisco
- Ethernet speed: Gigabit

Package contents

- SFP module

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	240	8.50	50.00	29.00	54.50	79,025.00
Packaging Unit Inside	30	1.06	7.00	20.00	30.00	4,200.00
Packaging Unit Single	1	0.04	3.00	12.00	9.00	324.00
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

More images:

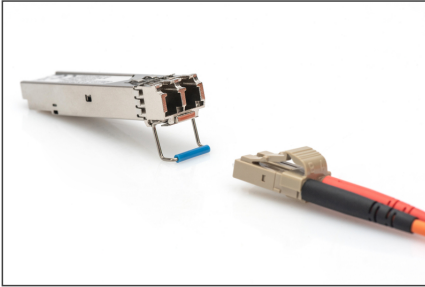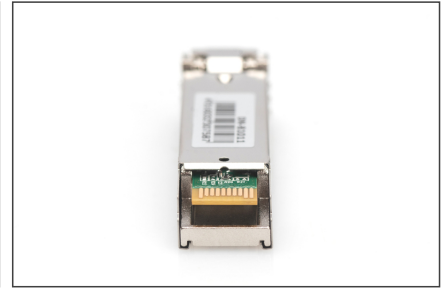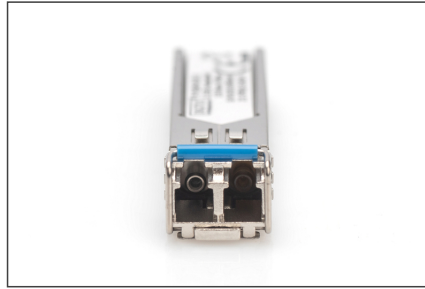

SFP Modules							
Product Number	DOM Code	Speed	Distance	Connector	Mounting	Operating Temperature	Industrial Version
Fast Ethernet							
DM-4001	42780000400	1.0 Gbps	2 km	LC-Multimode Duplex	191mm	0 to +70 °C	✓
DM-4002	42780000700	1.0 Gbps	550 m	LC-BiDi Multimode Duplex	191mm	0 to +70 °C	✓
DM-4004	42780000750	1.0 Gbps	550 m	LC-BiDi Multimode Duplex	191mm	0 to +70 °C	✓
10G Ethernet							
DM-4005	42780000800	10 Gbps	100 m	LC-Multimode Duplex	191mm	0 to +70 °C	✓
DM-4006	42780000850	10 Gbps	200 m	LC-BiDi Multimode Duplex	191mm	0 to +70 °C	✓
DM-4007	42780000900	10 Gbps	200 m	LC-BiDi Multimode Duplex	191mm	0 to +70 °C	✓
DM-4008	42780000950	10 Gbps	400 m	LC-BiDi Multimode Duplex	191mm	0 to +70 °C	✓
DM-4009	42780001000	10 Gbps	100 m	LC-Multimode Duplex	191mm	0 to +70 °C	✓
DM-4010	42780001050	10 Gbps	100 m	LC-Multimode Duplex	191mm	0 to +70 °C	✓
10G Ethernet Industrial							
DM-4011	42780001100	1.0 Gbps	200 m	LC-Multimode Duplex	191mm	-40 to +85 °C	✓
DM-4012	42780001150	1.0 Gbps	200 m	LC-Multimode Duplex	191mm	-40 to +85 °C	✓
DM-4013	42780001200	1.0 Gbps	200 m	LC-Multimode Duplex	191mm	-40 to +85 °C	✓
DM-4014	42780001250	1.0 Gbps	200 m	LC-Multimode Duplex	191mm	-40 to +85 °C	✓
DM-4015	42780001300	1.0 Gbps	200 m	LC-Multimode Duplex	191mm	-40 to +85 °C	✓
DM-4016	42780001350	1.0 Gbps	200 m	LC-Multimode Duplex	191mm	-40 to +85 °C	✓
DM-4017	42780001400	1.0 Gbps	200 m	LC-Multimode Duplex	191mm	-40 to +85 °C	✓
DM-4018	42780001450	1.0 Gbps	200 m	LC-Multimode Duplex	191mm	-40 to +85 °C	✓