


# DIGITUS Cabo de ligação eléctrica

AK-440100-050-S  
EAN 4016032311744

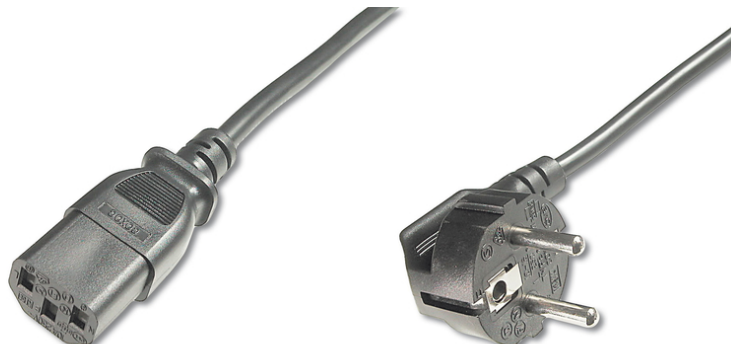

**Power Cord, CEE 7/7 (Typ-F) 90° angled - C13 M/F, 5.0m, H05VV-F3G 1.0qmm, black**

Este cabo de rede serve para a ligação de um computador ou monitor à rede elétrica doméstica (tomada).

## Aprovações europeias

### Attributes

- Assortment: Device Connection Cables
- Cable standard: H05 VV F3G

- Color cable: black
- Color connector: black
- Connector 1: Schuko (CEE 7/7), plug
- Connector 2: IEC C13, jack
- Connector surface: nickel-plated
- Current load capacity: 250V/10A
- Lead cross-section: 1.0qmm
- Packaging: Polybag
- Wire material: CU
- Length: 5 m

| Logistics                    |              |             |            |            |             |           |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------|
|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³       |
| Packaging Unit Carton        | 30           | 14.48       | 55.00      | 36.00      | 20.00       | 39,600.00 |
| Packaging Unit Inside        | 5            | 2.41        | 18.00      | 29.00      | 10.00       | 5,220.00  |
| Packaging Unit Single        | 1            | 0.48        | 5.00       | 17.00      | 21.00       | 1,785.00  |
| Net single without Packaging | 1            | 0.45        | 18.00      | 15.00      | 4.50        | 0.00      |

## Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

## EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)