


# DIGITUS Кабель питания

**AK-440100-050-S**  
**EAN 4016032311744**

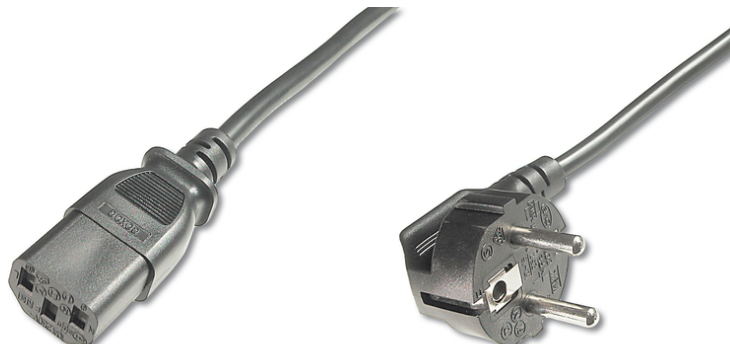

**Power Cord, CEE 7/7 (Typ-F) 90° angled - C13 M/F, 5.0m, H05VV-F3G 1.0qmm, black**

Этот кабель сетевого питания используется для подключения ПК или монитора к системе внутренней электрической сети (розетке).

**Европейская сертификация**

**Attributes**

- Assortment: Device Connection Cables
- Cable standard: H05 VV F3G

- Color cable: black
- Color connector: black
- Connector 1: Schuko (CEE 7/7), plug
- Connector 2: IEC C13, jack
- Connector surface: nickel-plated
- Current load capacity: 250V/10A
- Lead cross-section: 1.0qmm
- Packaging: Polybag
- Wire material: CU
- Length: 5 m

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	30	14.48	55.00	36.00	20.00	39,600.00
Packaging Unit Inside	5	2.41	18.00	29.00	10.00	5,220.00
Packaging Unit Single	1	0.48	5.00	17.00	21.00	1,785.00
Net single without Packaging	1	0.45	18.00	15.00	4.50	0.00

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)