

DIGITUS Cabo instalação par entrançado Categoria 5e U-UTP ASSNET100

ACU-4511-305
EAN 4016032317081



ASSNET100 CAT 5e U-UTP installation cable, 100 MHz Eca (PVC), AWG 23/1, 305 m paper box, sx, grey

Adequado para instalações de linhas de cabo classe D, 100MHz

ASSNET assegura o melhor desempenho e qualidade de ligação para a sua rede




- Quantidade total de condutores isolados: 2x8, entrançados em 2x4 pares
- Código de cor: azul-branco, laranja-branco, verde-branco, castanho-branco
- Revestimento geral: nenhum

Attributes

- Assortment: Twisted Pair Installation Cables
- Category: CAT 5e
- Shielding: U-UTP, unshielded
- CPR: Eca
- Length: 305 m
- Color: grey
- Jacket: PVC
- Structure: 4 x 2 AWG 23/1, solid twisted pair


Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	2	15.20	42.00	38.00	38.00	60,648.00
Packaging Unit Inside	1	7.60	20.00	35.00	35.50	24,850.00
Packaging Unit Single	1	7.60	20.00	35.00	35.50	24,850.00
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

More images:

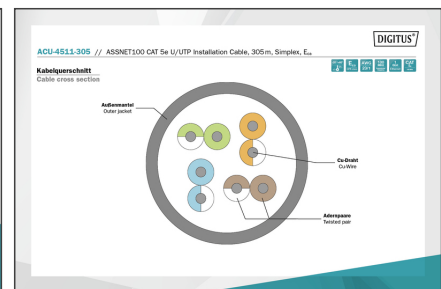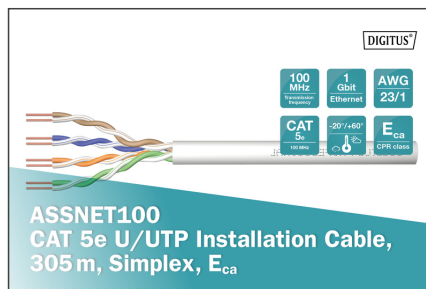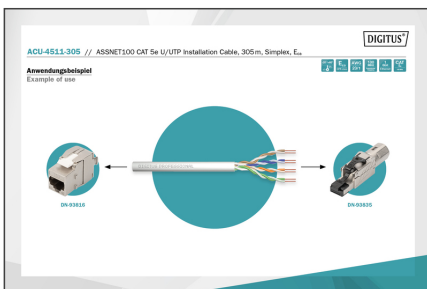

Produktdaten (Product Information)	Physikalische Spezifikationen (Physical Properties)
Produktname: 100000-1	Typ: Kupferkabel, RJ45, Cat. 6E, 100m, 23°C, 95dB, 100m, 23°C
Artikelnummer: 100000-1	Werkstoff: Kupferkabel, RJ45, Cat. 6E, 100m, 23°C, 95dB, 100m, 23°C
Hersteller: ASSMANN ELECTRONIC	Lebensdauer: 10 Jahre
Material: Kupferkabel, RJ45, Cat. 6E, 100m, 23°C, 95dB, 100m, 23°C	Lebensdauer: 10 Jahre
Lebensdauer: 10 Jahre	Lebensdauer: 10 Jahre

LINKAGESPEZIFIKATIONEN (Transmission Properties)								
FRÉQ.	ATT.	NEQD.	PL. NEQD.	ACR.	PL. ACR.	RL.	ELDRIFT.	PL. ELDRIFT.
MHz	dB	dB	dB	dB	dB	dB	dB	dB
1	1	0	10	10	14	15	100	100
10	12	20	10	10	14	15	100	100
100	15	25	15	15	19	20	100	100
1000	18	30	20	20	24	25	100	100
10000	21	35	25	25	29	30	100	100
100000	24	40	30	30	34	35	100	100
1000000	27	45	35	35	39	40	100	100
10000000	30	50	40	40	44	45	100	100

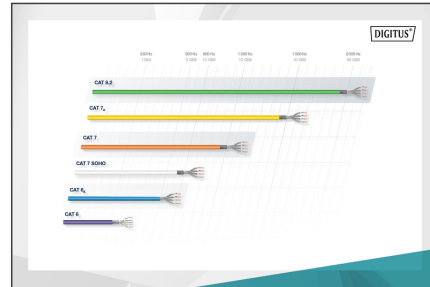

Produktname	Beschreibung	Lebensdauer (Jahre)	Werkstoff	Technische Spezifikationen	Materialien
B2a	Netzwerk	1+	Kupfer	• Netzwerke	• Kupferkabel
Ca	Netzwerk	3	Kupfer	• Netzwerke	• Kupferkabel
D2a	Netzwerk	3	Kupfer	• Netzwerke	• Kupferkabel
E2a	Netzwerk	3	Kupfer	• Netzwerke	• Kupferkabel



Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- Installation only in dry rooms.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
 info@assmann.com