


DIGITUS CAT 6 S/FTP patch cord

DK-1644-010/R
EAN 4016032321668

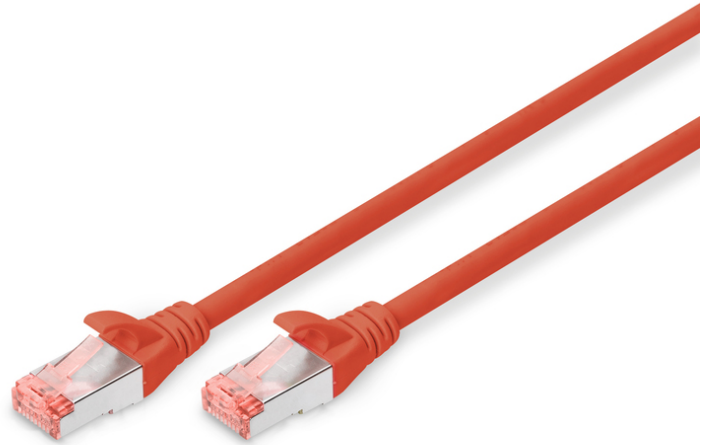

CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 1 m, color red

Os cabos de interconexões DIGITUS® da categoria 6, classe E são produzidos e testados segundo as normas ISO/IEC 11801 e DIN EN 50173 CAT 6. Os cabos de interconexões DIGITUS® garantem que a instalação dos cabos corresponda à especificação de canal ISO & EN e oferecem um excelente desempenho na cablagem CAT 6 DIGITUS®. A nova manga de proteção contra torção com proteção de alavanca de engate evita que os cabos se ensarilhem e protege simultaneamente a alavanca de engate contra quebras. A cor vermelha dos conectores permite uma rápida identificação da categoria 6 dos mesmos.

Melhor desempenho e melhor qualidade de ligação com a rede.

- 2x Conectores RJ45 (8P8C)
- Coberturas com proteção contra dobras, redução de tensão e proteção contra alavanca de retenção
- Indicação de comprimento nas tampas




- Conductor interno: Cobre (Cu)


Attributes

- Configuration: 1:1
- Connector 1: Modular RJ45 (8/8) plug
- Connector 2: Modular RJ45 (8/8) plug
- Packaging: DIGITUS Polybag
- Category: CAT 6
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Length: 1 m
- Color: red
- Jacket: LSOH
- Slim Version: no
- Structure: 4 x 2 AWG 27/7, twisted pair
- Flat Version: no

| Logistics | | | | | | |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------|
| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³ |
| Packaging Unit Carton | 180 | 8.60 | 46.00 | 33.00 | 28.00 | 42,504.00 |
| Packaging Unit Inside | 10 | 0.48 | 8.70 | 25.00 | 30.00 | 6,525.00 |
| Packaging Unit Single | 1 | 0.05 | 1.60 | 14.00 | 25.00 | 560.00 |
| Net single without Packaging | 1 | 0.04 | 100.00 | 1.20 | 1.30 | 0.00 |

More images:

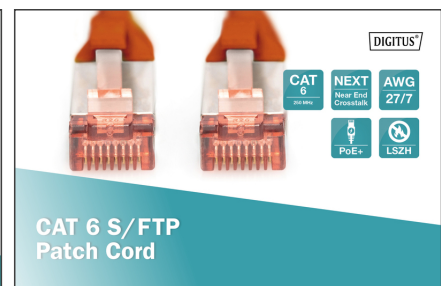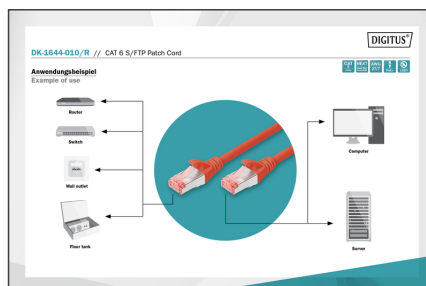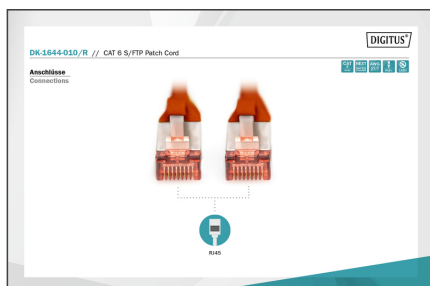

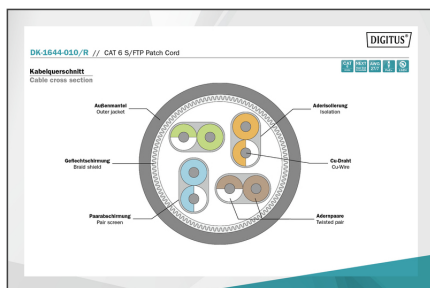

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Ensure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable.
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com